

Series EM2218

Header with Flanges; (Mates with EM2118, EM3118 Series); 5.08 Centers

SPECIFICATIONS:

Rating: 12A, 300V

Center Spacing: 0.20" (5.08mm)

Housing Material: UL rated 94V0 Thermoplastic


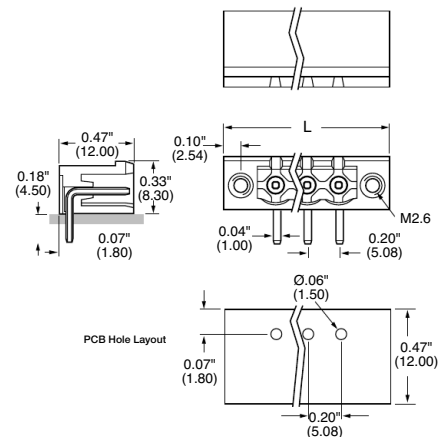
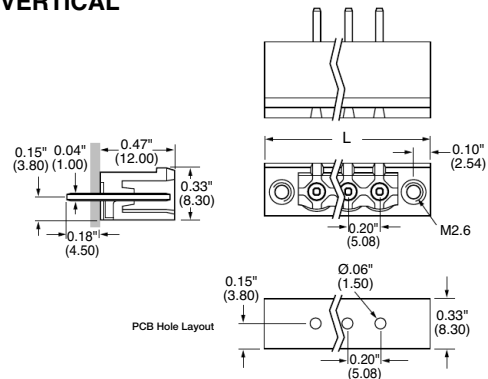
Contact Material: Tin-Plated Brass

Operating Temperature: 105°C (221°F) max., -55°C (-67°F) min.

Recommended PCB Hole Diameters: 0.059" (1.50mm)

Construction: Mold-to-Length

Agency Information:  File E62622; CE Certified

EM221804H**EM221804V****Dimensions - in (mm)****HORIZONTAL****VERTICAL****Part Numbering System**

Inches (Millimeters)

Series**EM2218****# of Poles****02 to 22****Orientation****H - Horizontal****V - Vertical**

Mating Plugs: EM2118 pg. 96
EM3118 pg. 97