
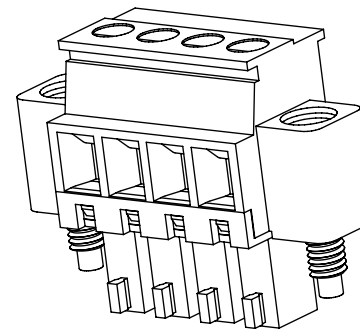
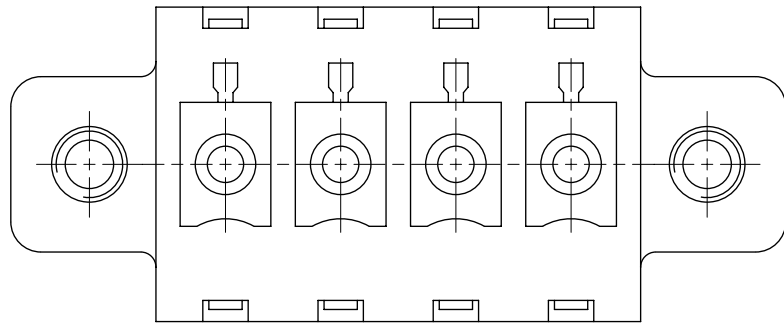
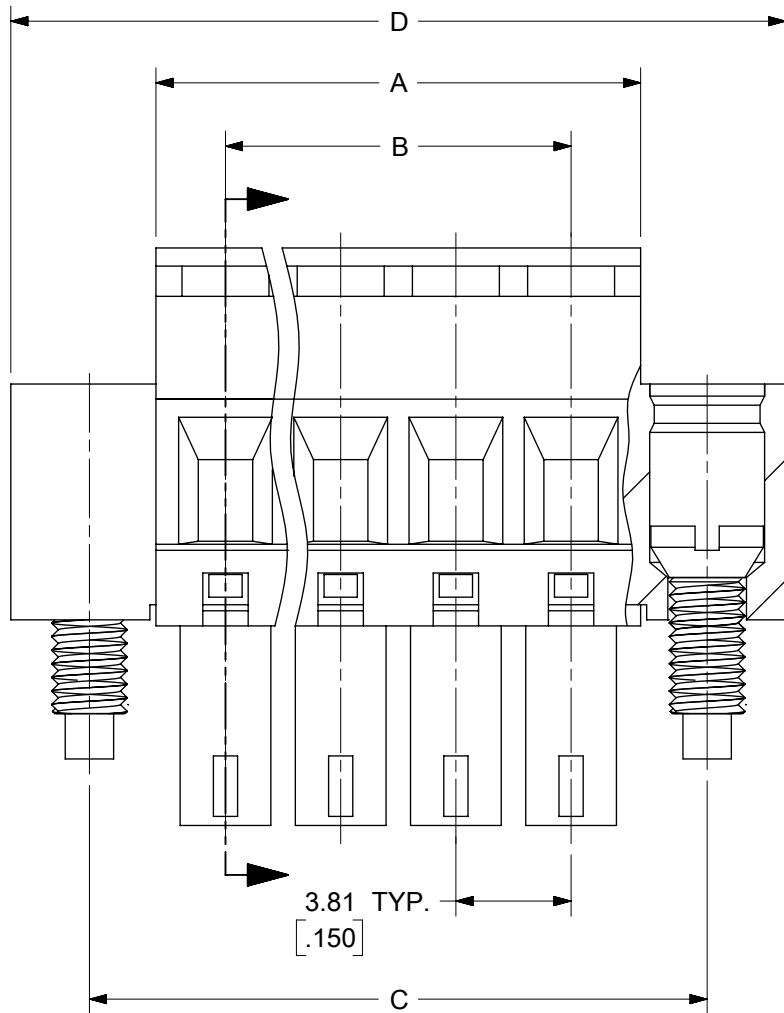
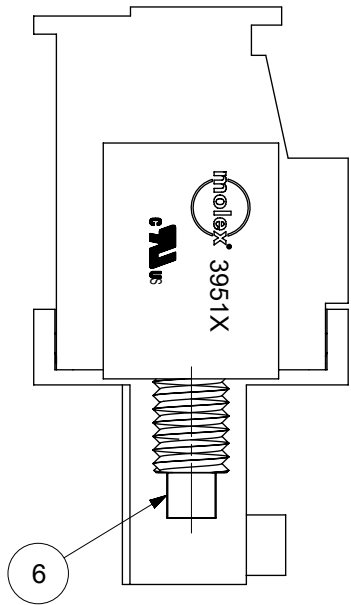


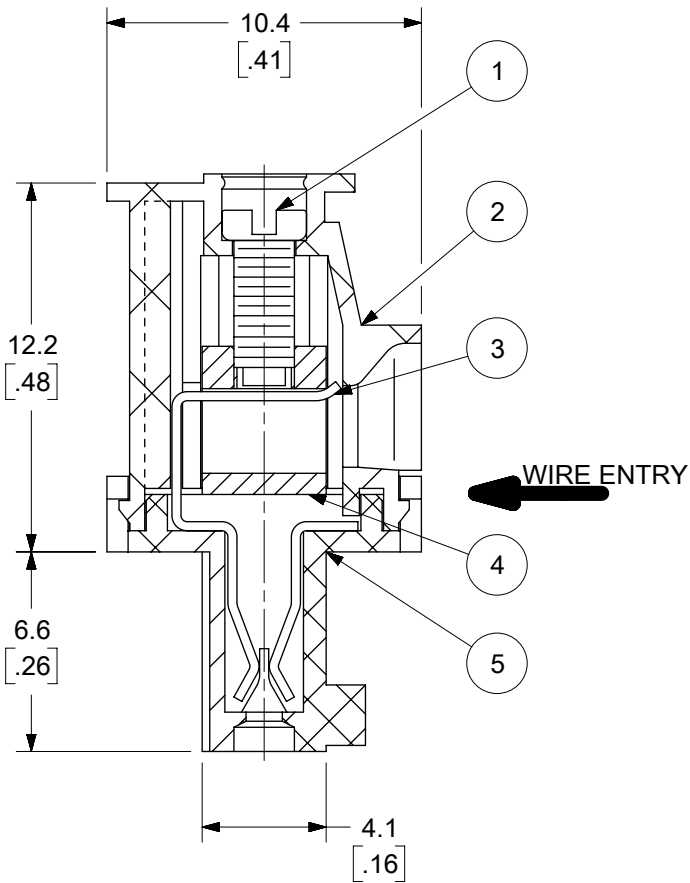

4 CIRCUIT SHOWN

SPECIFICATIONS:

1. MATERIAL:

- (1). SCREW: ZINC PLATED STEEL
- (2). BODY: PA 66 (UL94-V0)
- (3). TERMINAL: TIN PLATED PHOSPHOR BRONZE
- (4). CAGE: NICKEL PLATED BRASS
- (5). COVER: PA 66 (UL94-V0)
- (6). SCREW: ZINC PLATED STEEL

2. PRODUCT SPECIFICATION: PS-39500-001


3. WIRE RANGE: 30 - 16 AWG

4. TORQUE: 2 IN-LBS.

5. WIRE STRIP LENGTH: 6.50/.256

6. NUMBER OF CIRCUIT POSITIONS AVAILABLE = 2 THROUGH 20

TOLERANCES			
MM	TOL	INCH	TOL
0-6	±0.25	0-.24	±.010
>6-30	±0.40	>.24-1.18	±.016
>30-120	±0.50	>1.18-4.76	±.020
>120	±0.80	>4.76	±.031

FUNCTIONAL SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										
$\nabla = 0$	MM/INCH	SCALE		CURRENT REV DESC: UPDATED MATERIAL/PLATING NOTES FOR ITEMS 1-6. UPDATED MOLEX LATEST TITLE BLOCK				molex 3.81MM EURO TERM BLOCK VERT. PLUG FRONT WIRE ENTRY, MOUNTING ENDS				
		4:1										
$\nabla = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)			EC NO: 833839 DRWN: MARUTD 2025/09/02 CHK'D: DACHAMMER 2025/09/10 APPR: HKNEELAND 2025/09/15								
$\nabla = 0$	MM	INCH	PRODUCT CUSTOMER DRAWING									
DIVISIONAL SYMBOLS	4 PLACES	±						---	±	---		
	3 PLACES	±					---	±	SEE CHART			
	2 PLACES	±					SEE CHART	±	SEE CHART			
	1 PLACE	±	SEE CHART	±	---							
	0 PLACES	±	---	±	---							
ANGULAR TOL		±	---	INITIAL REVISION:				DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
								SD-39517-001	PSD	001	E	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER
				B-SIZE		39517		SEE SHEET-2		GENERAL MARKET		1 OF 2

