
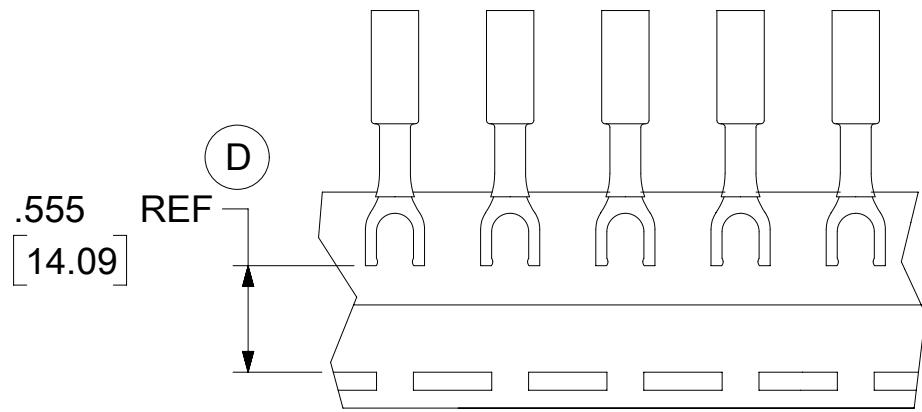


MAT'L NO (LOOSE PC)	ENG NO (LOOSE PC)	MAT'L NO (ON TAPE)	ENG NO (ON TAPE)	STUD SIZE	Ø"S" ±.005 (0.13)	"W" MAX	"L" REF
191640028	SB-227-06	191640948	SB-227-06T	6	.146 (3.71)	.37 (9.4)	1.37 (34.8)
191640029	SB-227-08	-	-	8	.173 (4.39)	.40 (10.2)	
191640030	SB-227-10	-	-	10	.198 (5.03)		
191640023	SB-224-06	-	-	6	.146 (3.71)	.31 (7.9)	1.30 (33.0)
191640024	SB-224-08	-	-	8	.173 (4.39)		

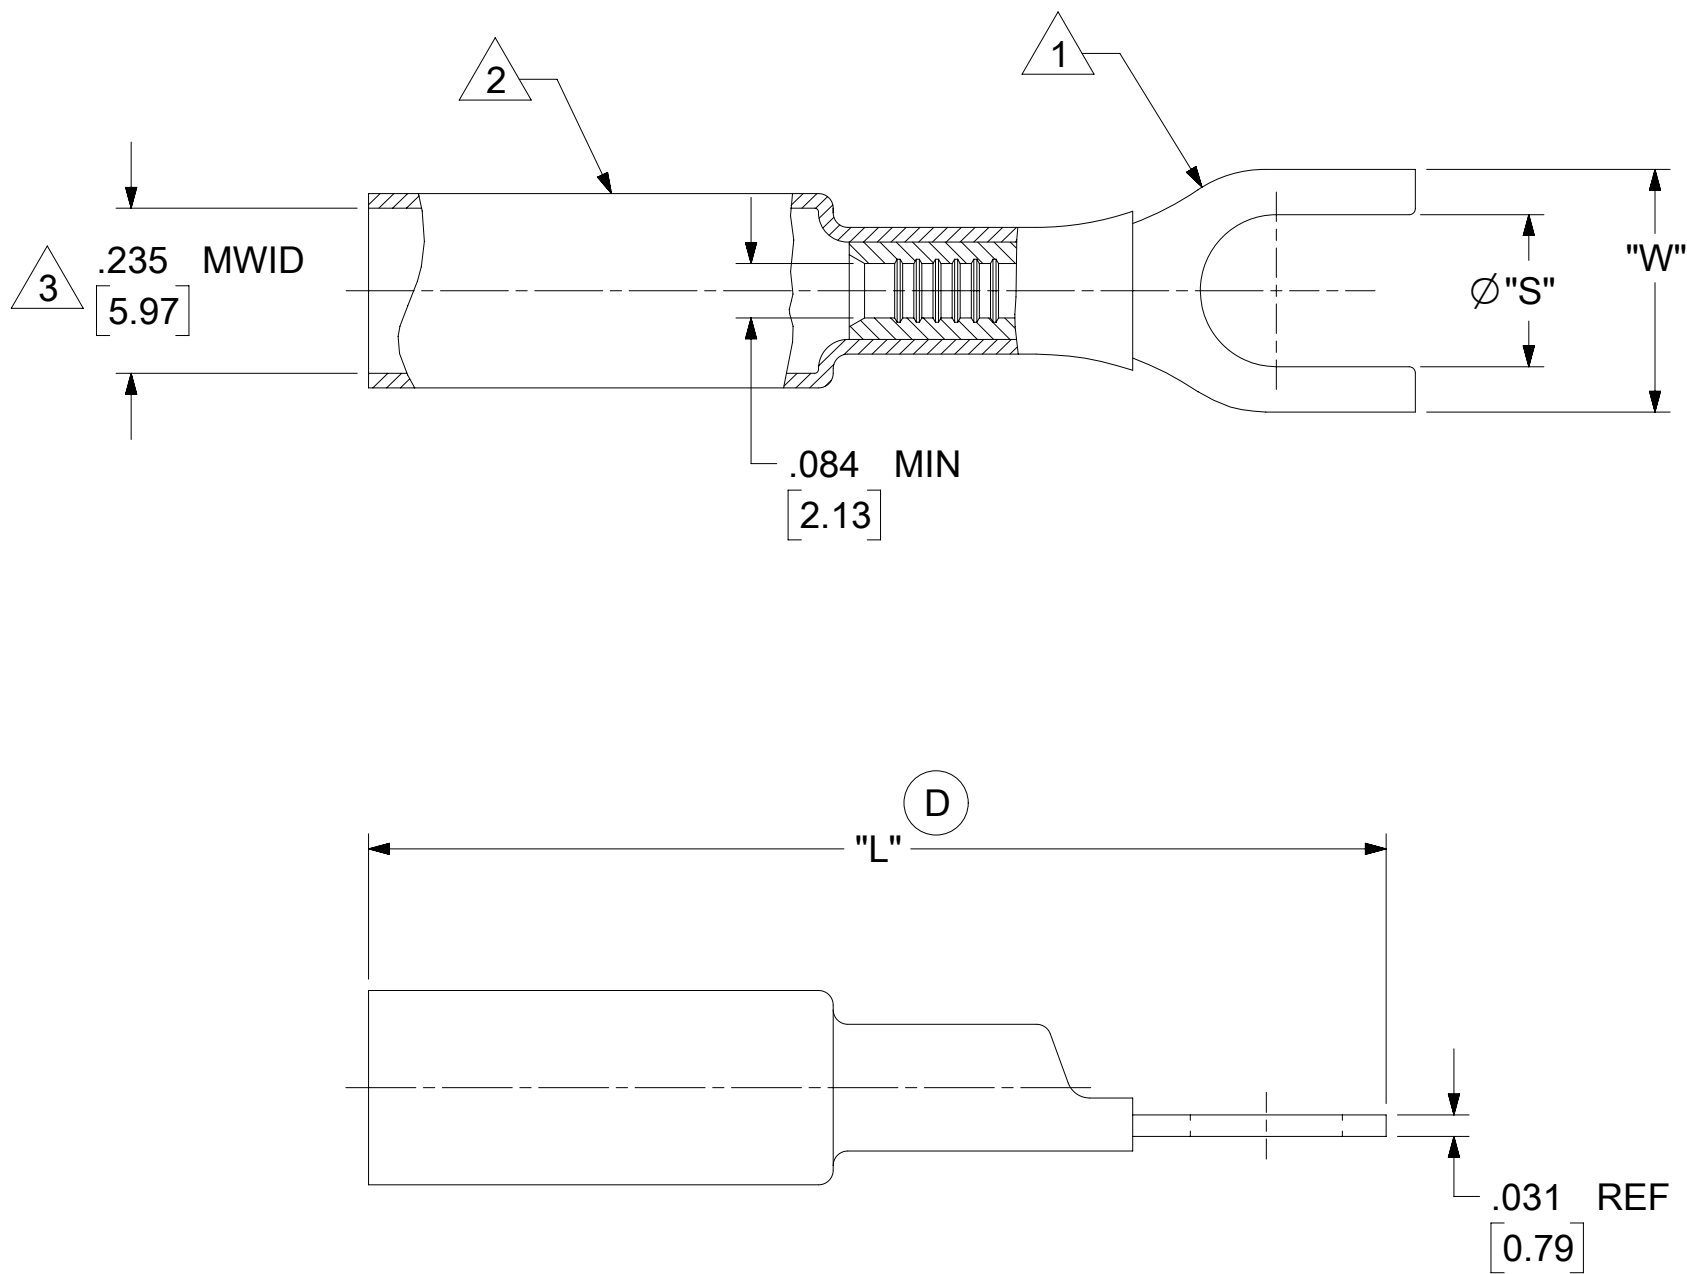

PARTS ON TAPE

- NOTES:
- 1 TERMINAL MATERIAL: TIN PLATED COPPER
 - 2 INSULATION MATERIAL: HEAT SHRINKABLE TUBING WITH HOTMELT ADHESIVE LINER. COLOR: BLUE.
 - 3 MWID = MAXIMUM WIRE INSULATION DIAMETER.
 - 4. MUST BE RoHS COMPLIANT.

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION														
= 0 = 0 = 0	DIMENSION UNITS		SCALE		CURRENT REV DESC: REDRAWN TO LATEST STANDARDS, "L" DIM WAS MAX, CORRECTED TAPE DIM EC NO: 803695 DRWN: DEANNM1 2024/11/01 CHK'D: ETHRODAHL 2024/11/11 APPR: ETHRODAHL 2024/11/11 INITIAL REVISION: DRWN: BENDERLE 2002/12/11 APPR: RDEROSS 2002/12/12					molex PERMA-SEAL TERMINAL SPADE TERMINAL 16-14 AWG TAPE MOUNTED					
	INCH/MM		NTS												
	GENERAL TOLERANCES (UNLESS SPECIFIED)														
DIVISIONAL SYMBOLS			MM	INCH											
	4 PLACES	±		±											
	3 PLACES	±		±											
	2 PLACES	±		±						PRODUCT CUSTOMER DRAWING					
	1 PLACE	±		±						DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION	
	0 PLACES	±		±						SD-19164-027		PSD	001	D	
ANGULAR TOL ± 0.5 °				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						C-SIZE		19164				GENERAL MARKET		1 OF 1	