
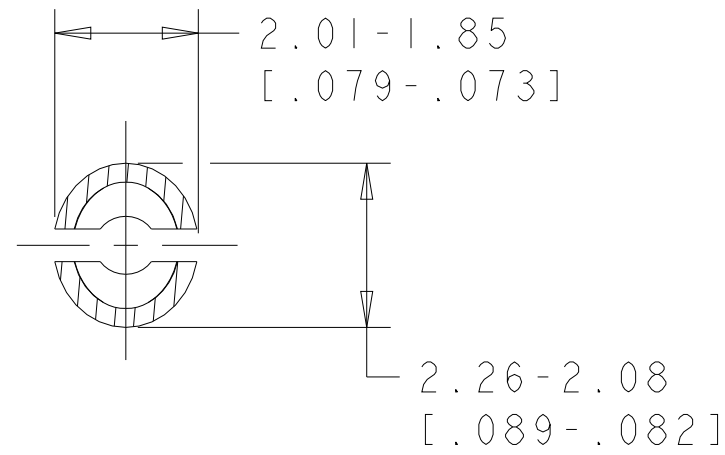
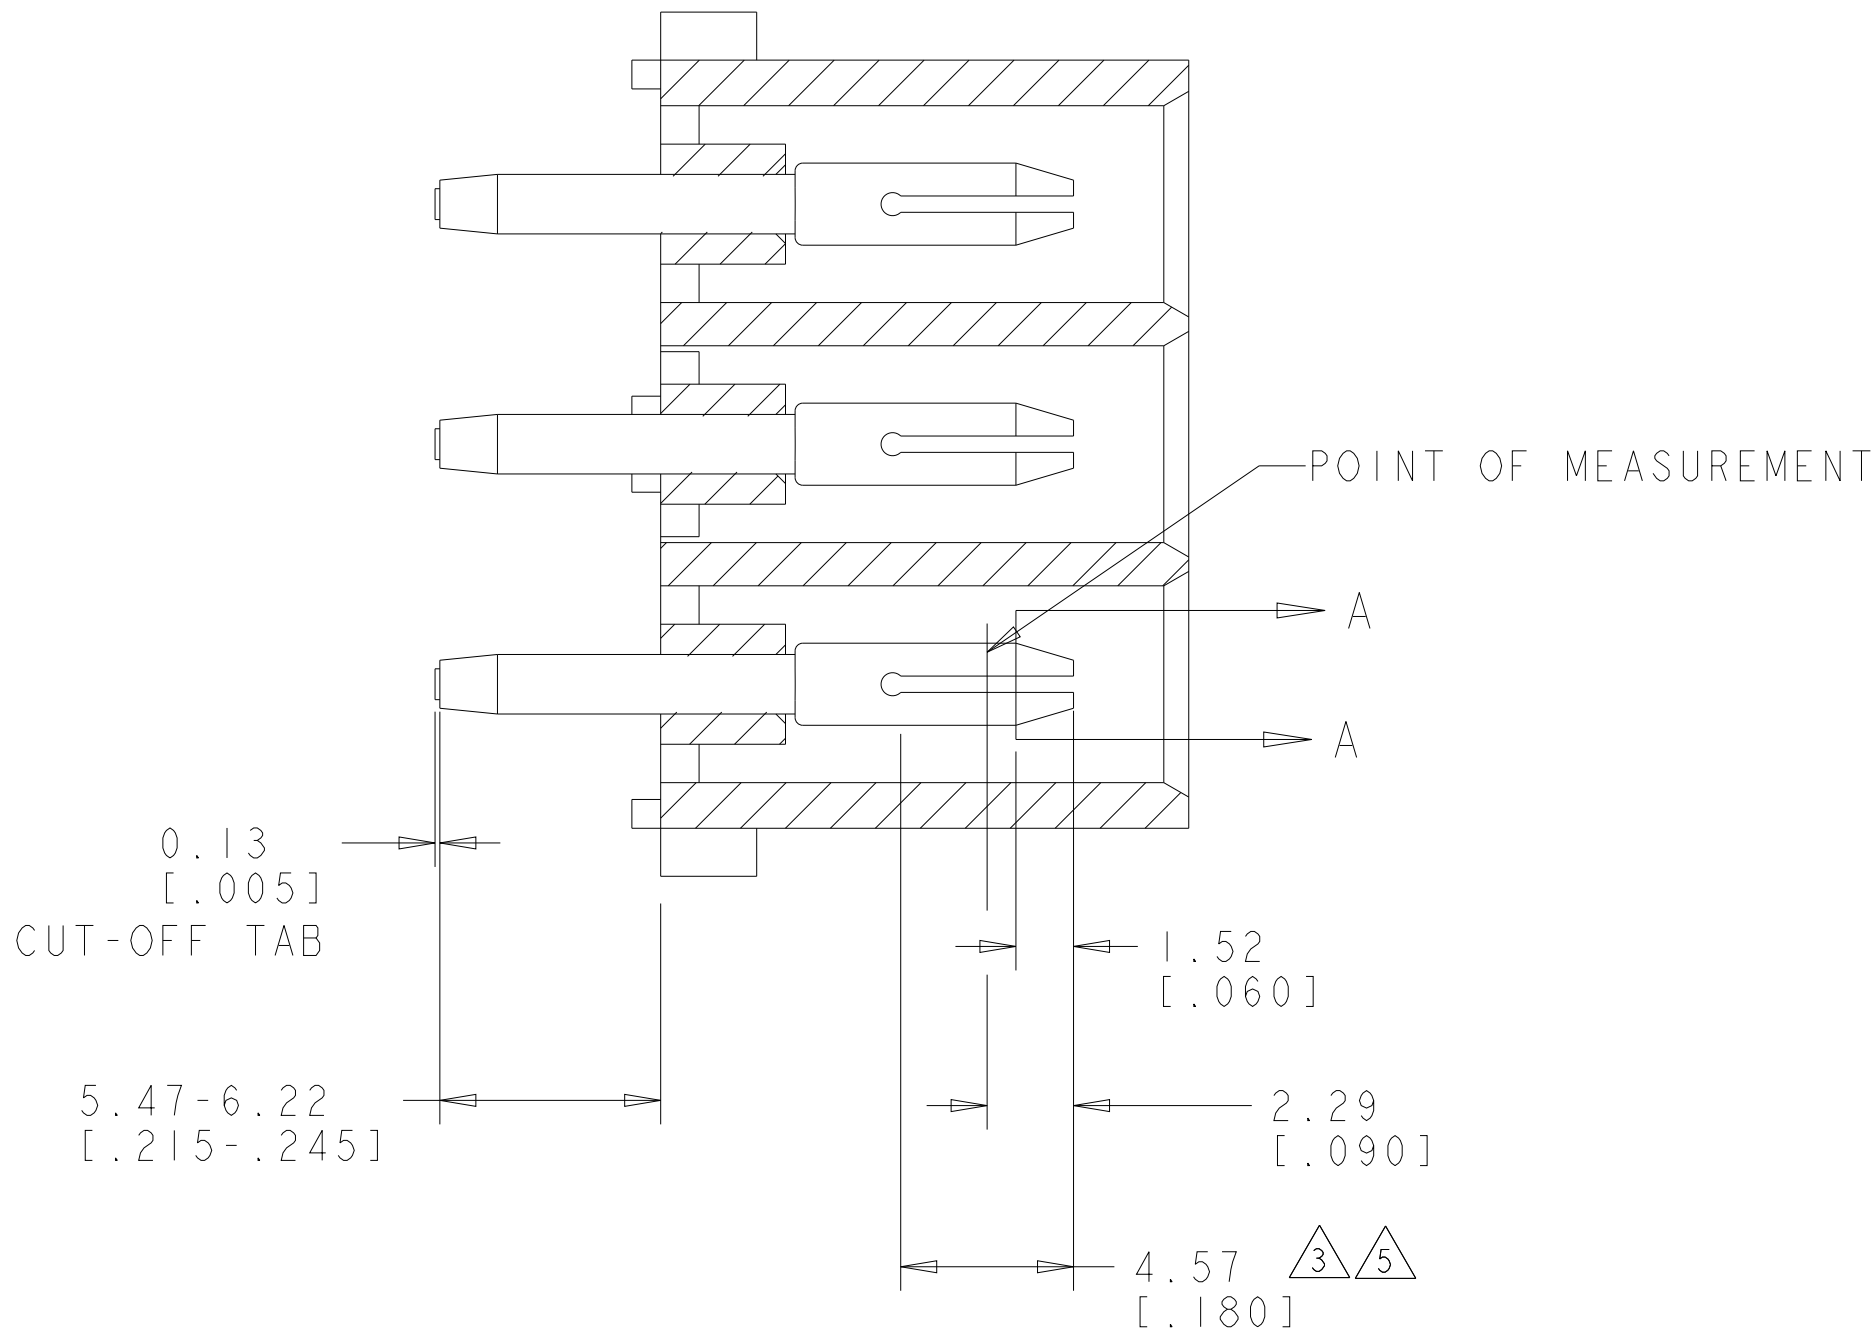
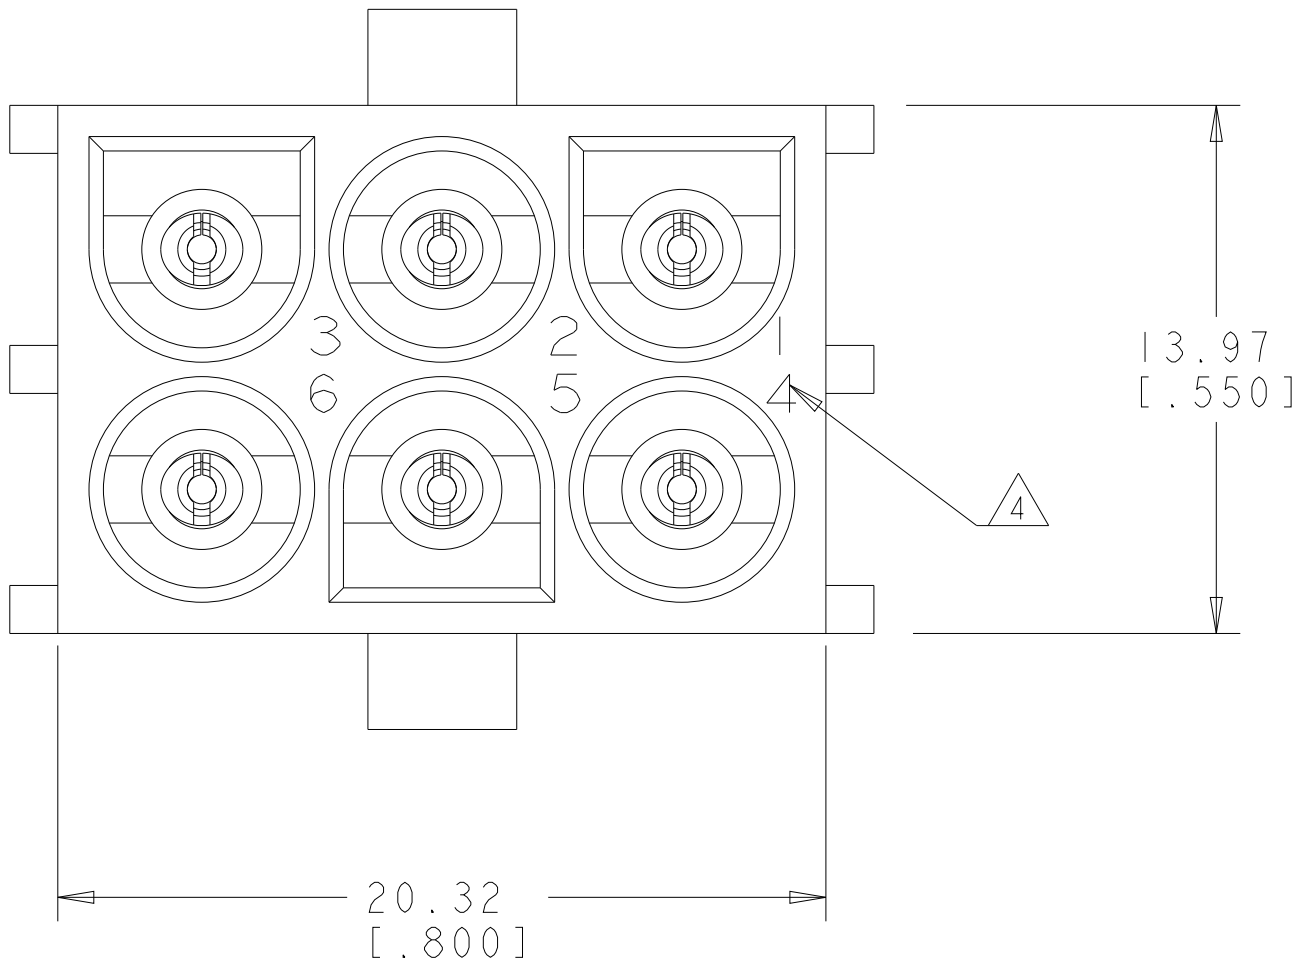
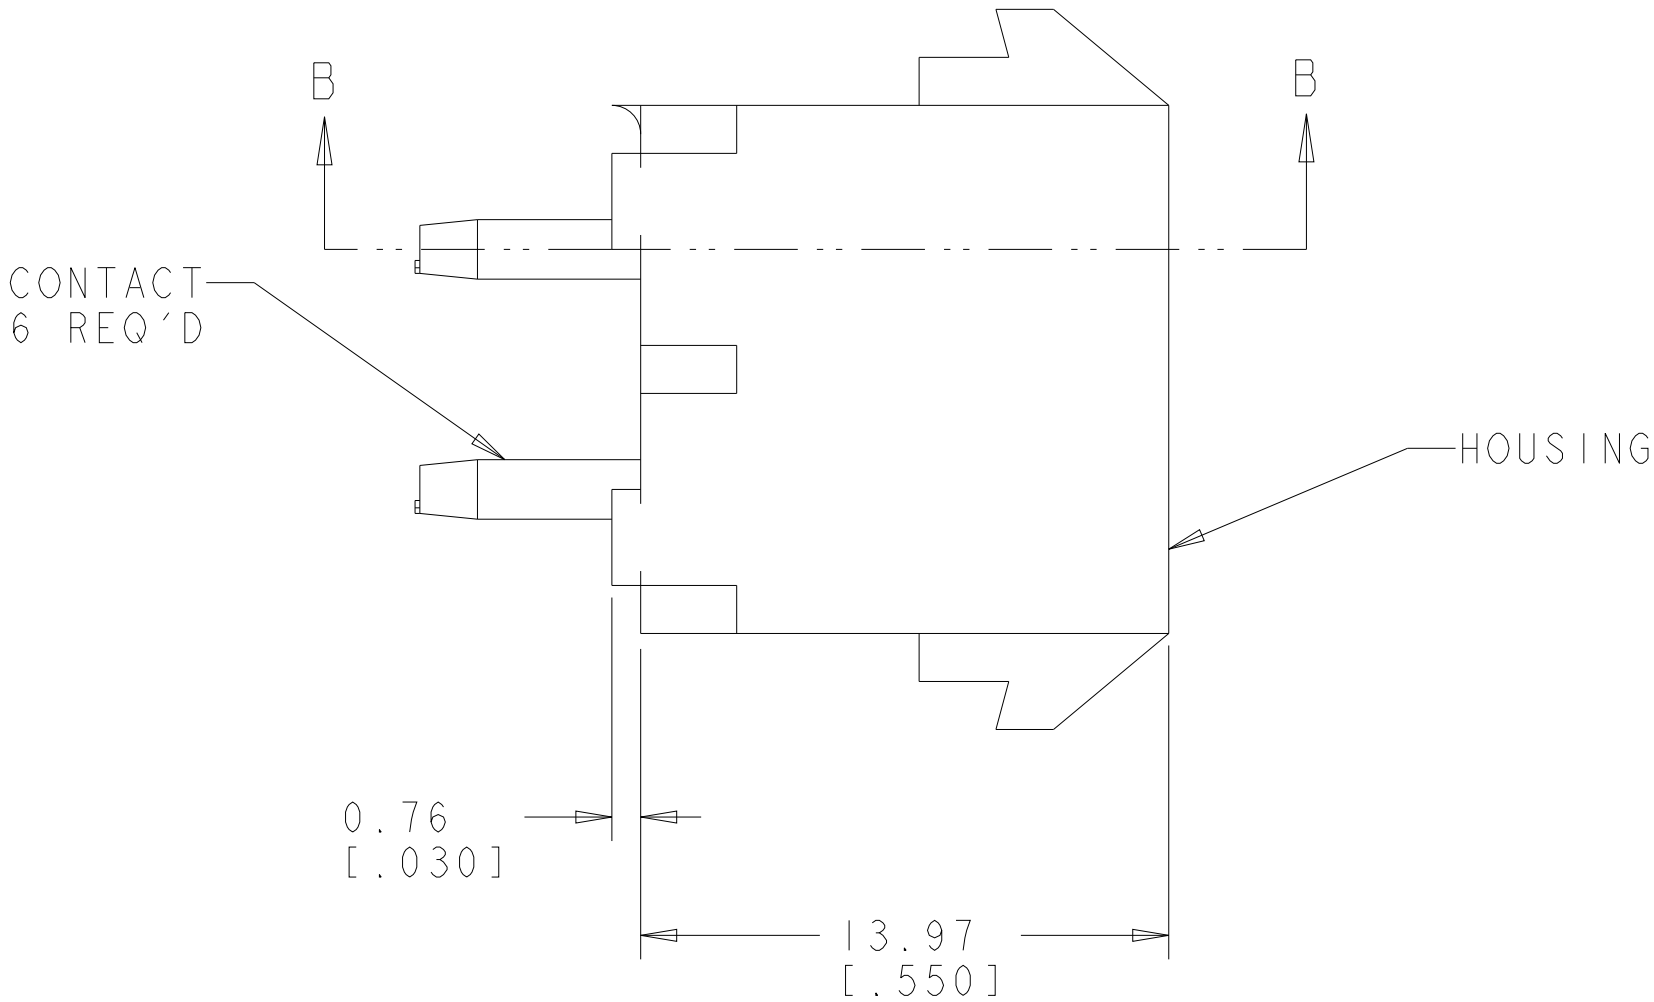



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	00		R1	REVISED PER ECR-12-011660	24JAN2013	KH	TM
			R2	REVISED PER ECR-21-119230	08NOV2021	SS	VS

1. PARTS MATE WITH HOUSING 480704.
2. PARTS COMPLY TO AMP SOLDERABILITY SPECIFICATION 109-11-3.
- 3 CONTACT IS PLATED OVERALL WITH 0.00127 [0.00050] NICKEL, THEN 0.00076 [0.00030] GOLD OVER CONTACT LENGTH INDICATED AND TIN LEAD ON SOLDER TAIL END.
- 4 CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
- 5 CONTACT IS PLATED OVERALL WITH 0.00127 [0.00050] NICKEL, THEN 0.00076 [0.00030] GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN ON SOLDER TAIL END.
6. DIMENSIONS IN BRACKETS ARE IN INCHES.
- 7 SUPERSEDED BY 350585-4
8. DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY CONDITION. ADDITIONAL 2% GROWTH DUE TO END USE LOCATION MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.

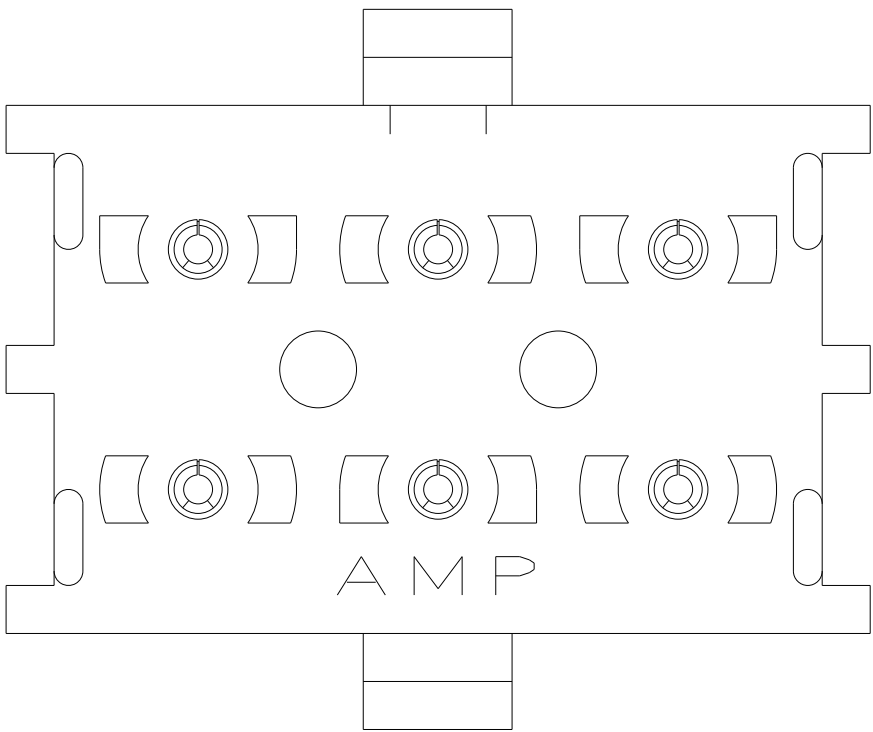


SECTION A-A
SCALE 10:1

SECTION B-B

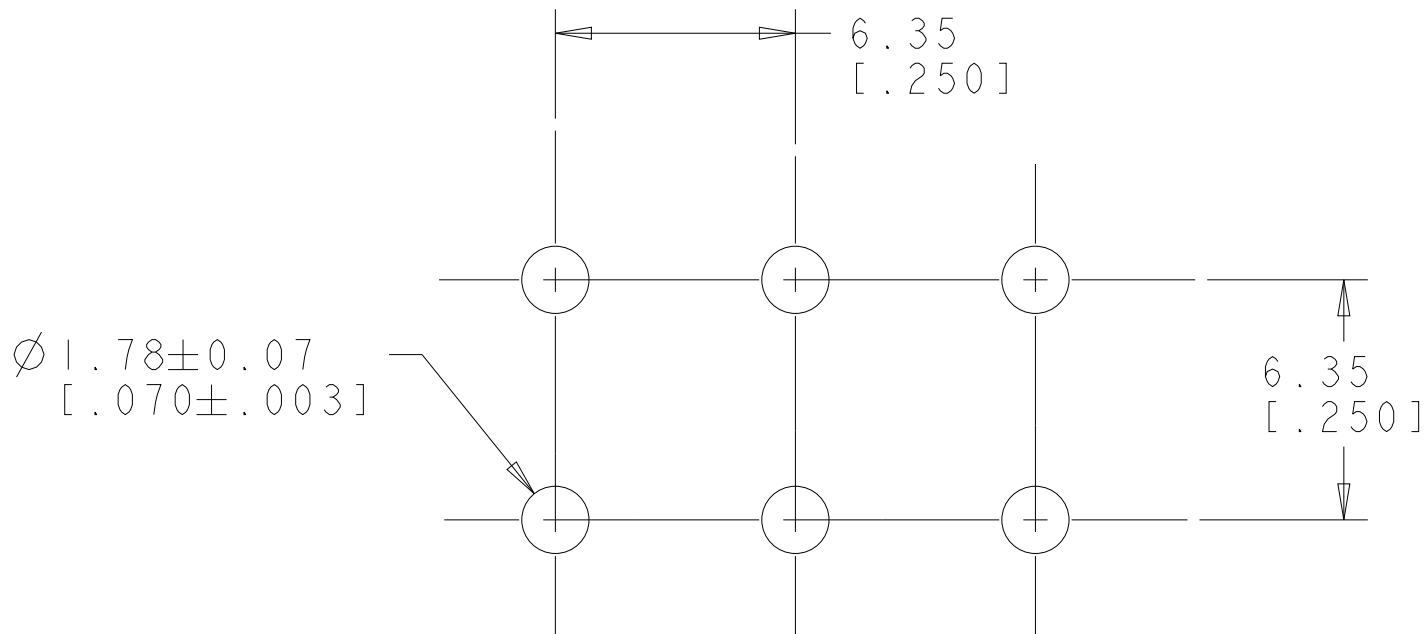


RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.57 [0.062] THICK P.C. BOARD

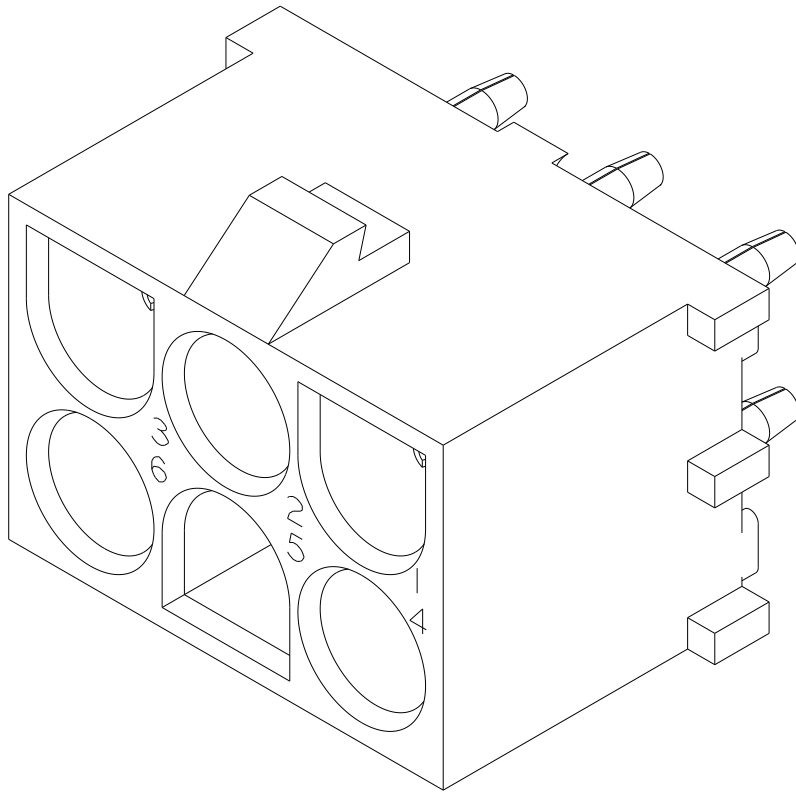

3 DIMENSIONAL MODEL
SCALE 4:1

PHOSPOR BRONZE, GOLD 5	NYLON, UL94V-2, NATURAL	350585-4
7 PHOSPOR BRONZE, GOLD 3	NYLON, UL94V-2, NATURAL	350585-2
PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-2, NATURAL	350585-1
PIN CONTACT MATERIAL AND FINISH	HOUSING MATERIAL AND COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 02SEP2005	 TE Connectivity				
DIMENSIONS: mm[INCHES]		CHK S. RIDGILL 02SEP2005					
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLOC ± 1 PLOC ± 2 PLOC ± 3 PLOC ± 4 PLOC ± ANGLES ± FINISH ± ±0°30'	APVD S. RIDGILL 02SEP2005	NAME				
		PIN HEADER ASSEMBLY, 6 CIRCUIT, UNIVERSAL MATE-N-LOK(TM)					
PRODUCT SPEC							
APPLICATION SPEC							
WEIGHT							
MATERIAL SEE TABLE		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO	
		A1		00779	C=350585		
		CUSTOMER DRAWING					
		SCALE		5:1	SHEET	1 OF 1	
		REV R2					

