


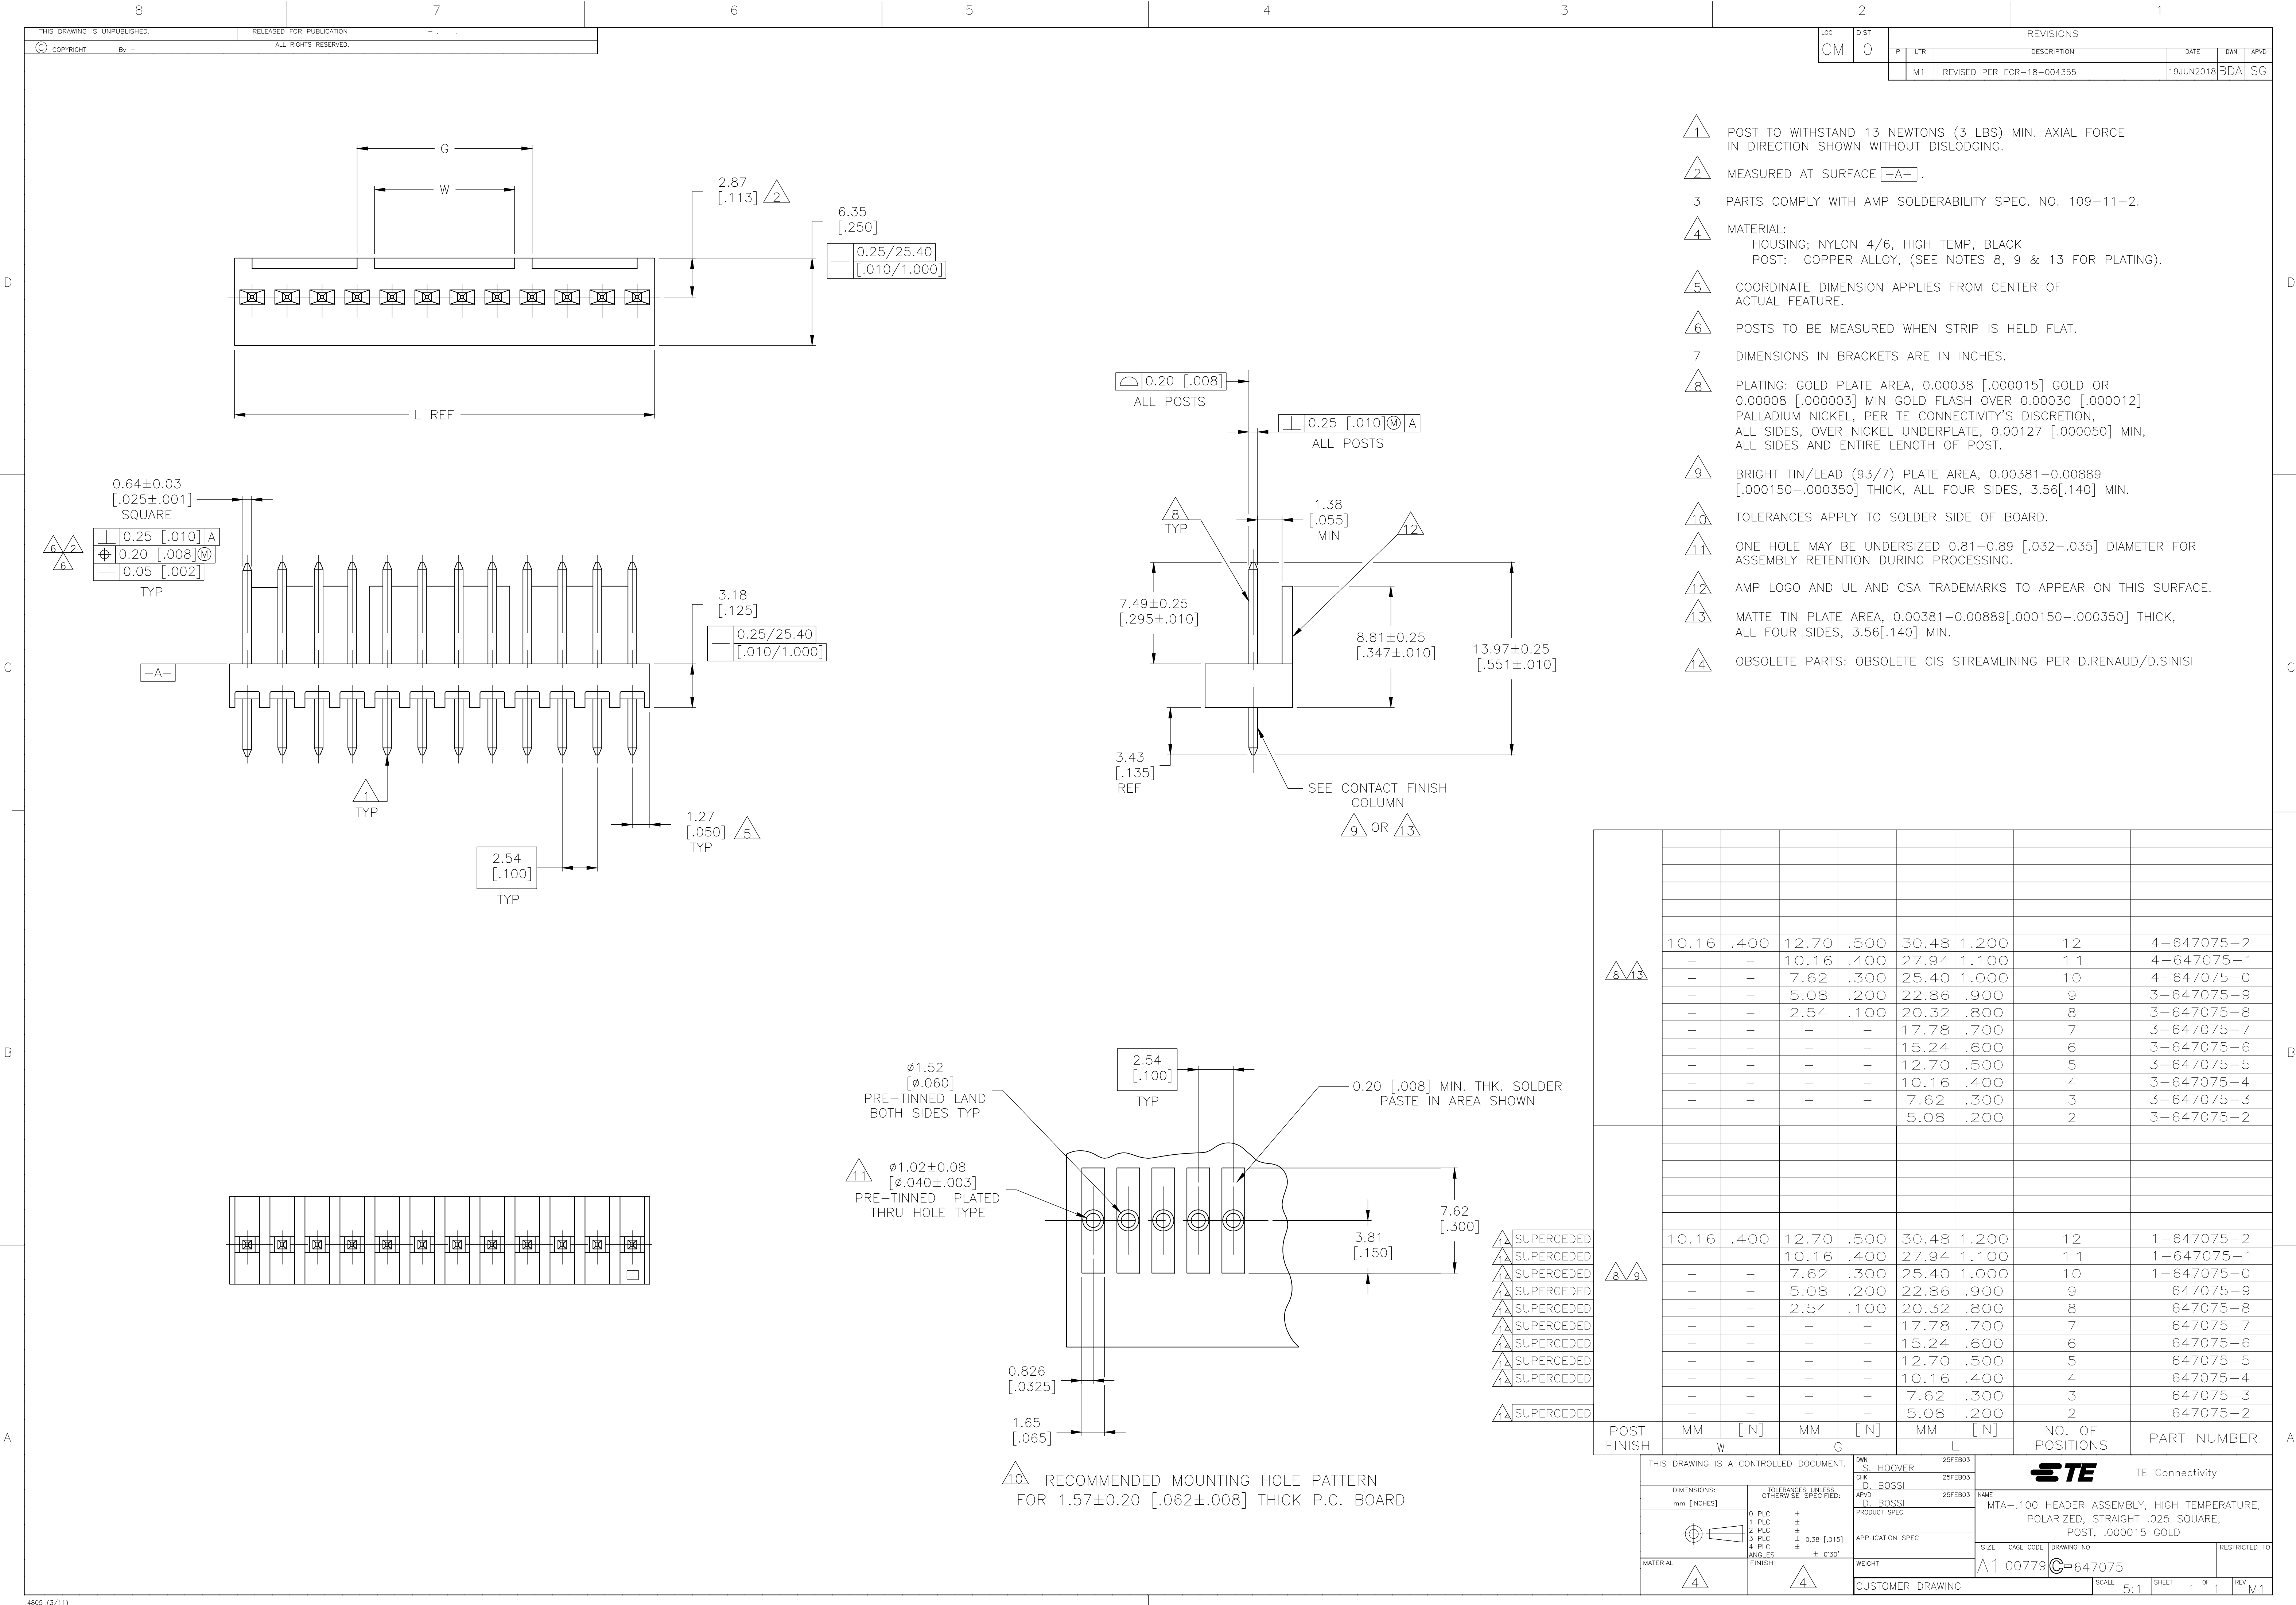

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	0		M1	REVISED PER ECR-18-004355	19JUN2018	BDA	SG

								
	10.16	.400	12.70	.500	30.48	1.200	12	4-647075-2
	-	-	10.16	.400	27.94	1.100	11	4-647075-1
	-	-	7.62	.300	25.40	1.000	10	4-647075-0
	-	-	5.08	.200	22.86	.900	9	3-647075-9
	-	-	2.54	.100	20.32	.800	8	3-647075-8
	-	-	-	-	17.78	.700	7	3-647075-7
	-	-	-	-	15.24	.600	6	3-647075-6
	-	-	-	-	12.70	.500	5	3-647075-5
	-	-	-	-	10.16	.400	4	3-647075-4
	-	-	-	-	7.62	.300	3	3-647075-3
	-	-	-	-	5.08	.200	2	3-647075-2
	10.16	.400	12.70	.500	30.48	1.200	12	1-647075-2
	-	-	10.16	.400	27.94	1.100	11	1-647075-1
	-	-	7.62	.300	25.40	1.000	10	1-647075-0
	-	-	5.08	.200	22.86	.900	9	647075-9
-	-	2.54	.100	20.32	.800	8	647075-8	
-	-	-	-	17.78	.700	7	647075-7	
-	-	-	-	15.24	.600	6	647075-6	
-	-	-	-	12.70	.500	5	647075-5	
-	-	-	-	10.16	.400	4	647075-4	
-	-	-	-	7.62	.300	3	647075-3	
-	-	-	-	5.08	.200	2	647075-2	
POST FINISH	MM	[IN]	MM	[IN]	MM	[IN]	NO. OF POSITIONS	PART NUMBER

1. SUPERCEDED
2. SUPERCEDED
3. SUPERCEDED
4. SUPERCEDED
5. SUPERCEDED
6. SUPERCEDED
7. SUPERCEDED
8. SUPERCEDED
9. SUPERCEDED
10. SUPERCEDED
11. SUPERCEDED
12. SUPERCEDED
13. SUPERCEDED
14. SUPERCEDED

RECOMMENDED MOUNTING HOLE PATTERN FOR 1.57±0.20 [.062±.008] THICK P.C. BOARD