
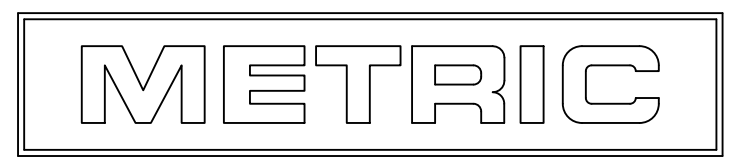
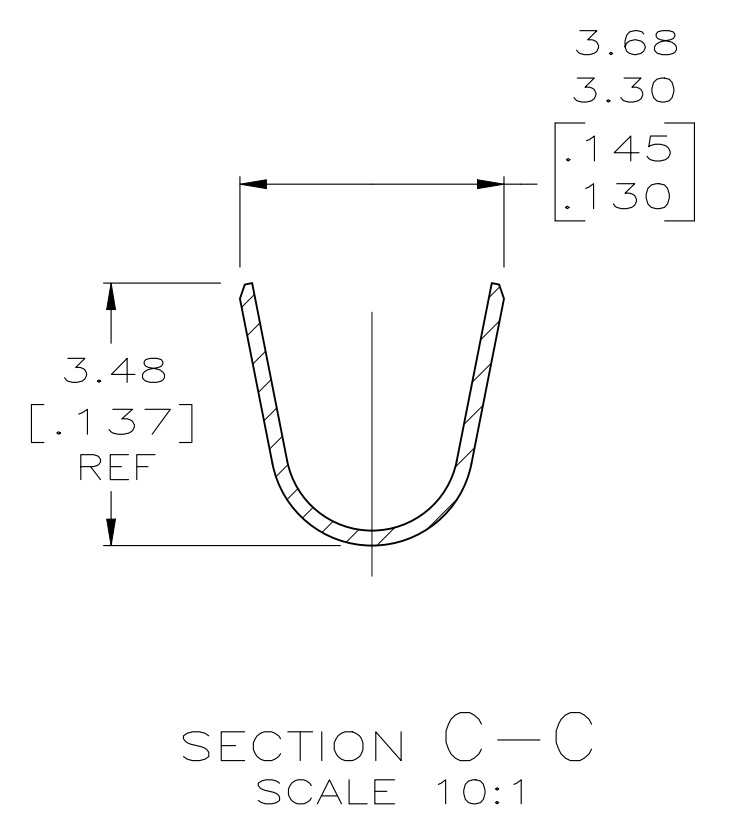
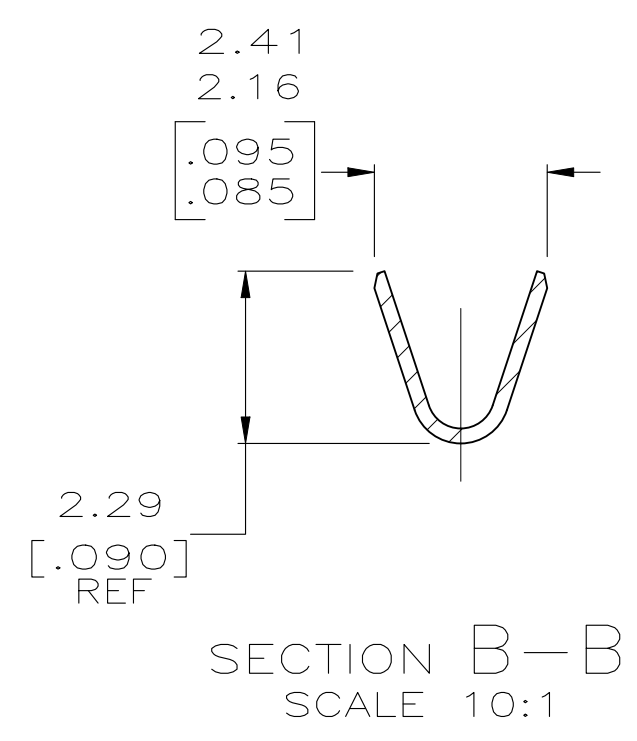
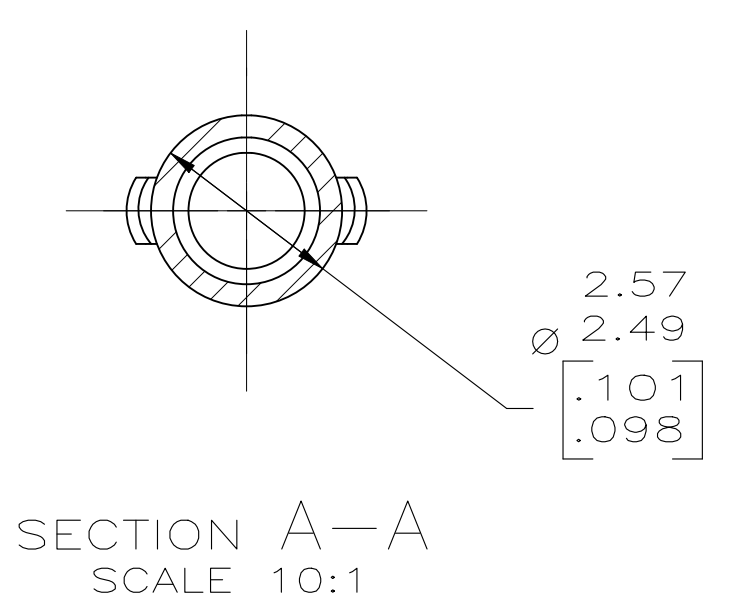
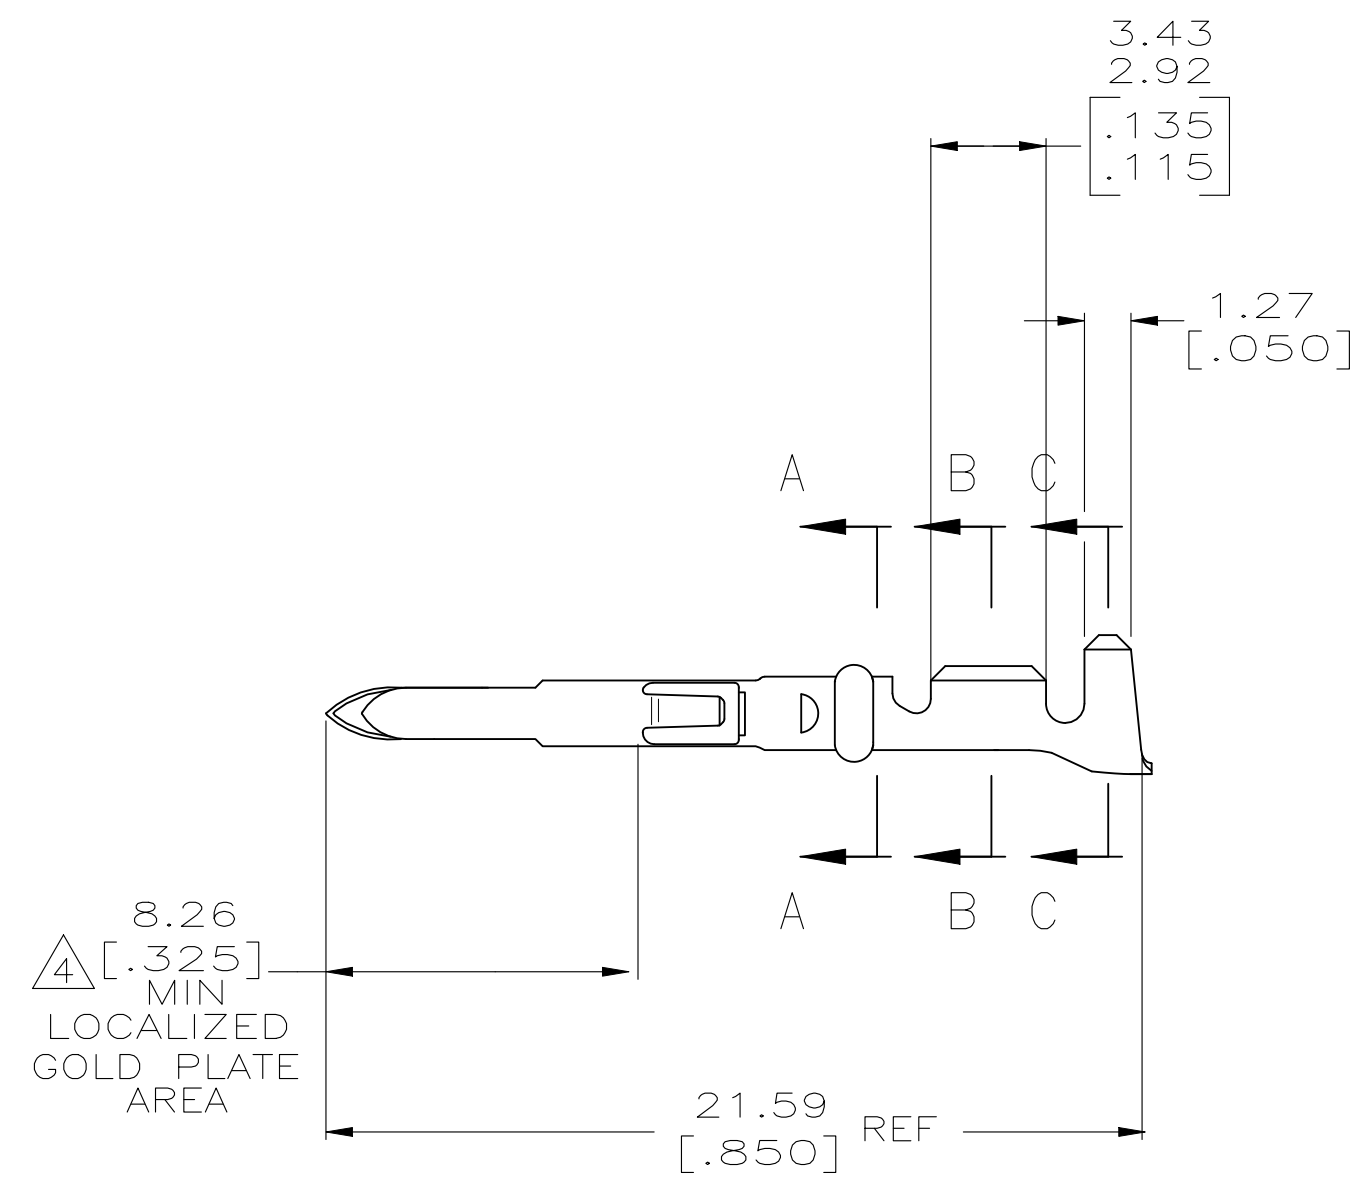
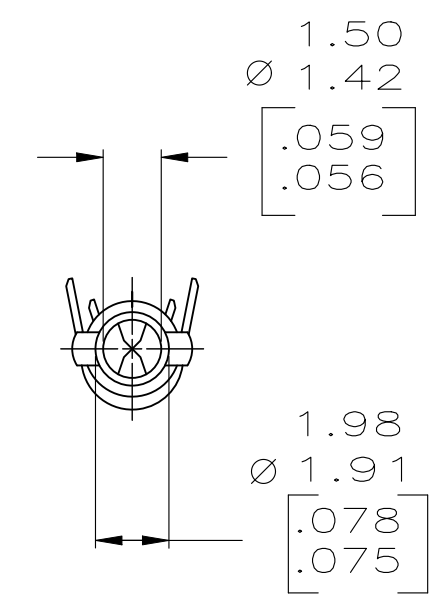


- 1 WIRE RANGE: 0.13–0.8mm<sup>2</sup> (26–18 AWG).
- 2 INSULATION RANGE: 1.27–2.92 [.050–.115] MAX. DIA.
- 3 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 4 TIP PLATE WITH 0.00076–0.00091 [.000030–.000036] MIN PRECIOUS METAL PLATE IN THE LOCALIZED GOLD PLATE AREA OVER 0.00127 [.000050] MIN NICKEL UNDERPLATE.

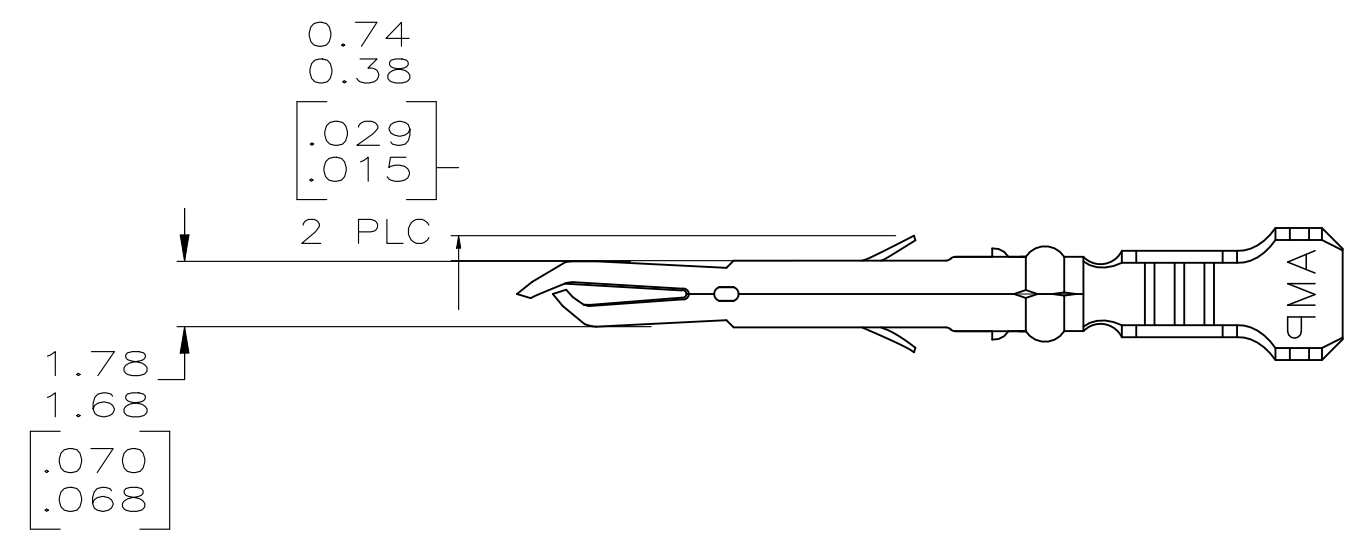

|                      |                      |          |
|----------------------|----------------------|----------|
| PRECIOUS METAL PLATE | 0.20 [.008] PHOS BRZ | 640580-2 |
| PRE-TIN              | 0.20 [.008] PHOS BRZ | 640580-1 |
| FINISH               | DESCRIPTION          | PART NO. |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm (INCHES)

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± 0.13 [.005]

4 PLC ± -

ANGLES ± -

TOLERANCES UNLESS OTHERWISE SPECIFIED:

DWN K. SALMON 3-21-95

CHK R. SWING 3-21-95

APVD W. LONG 3-21-95

SEE TABLE

SEE TABLE

SEE TABLE

WEIGHT -

SCALE 5:1

NAME

GROUNDING PIN, LOOSE PIECE, MR

SIZE A1

CAGE CODE 00779

DRAWING NO. 640580

RESTRICTED TO -

CUSTOMER DRAWING

SHEET 1 OF 1

REV D

TE Connectivity

4805 (1/15)

2D