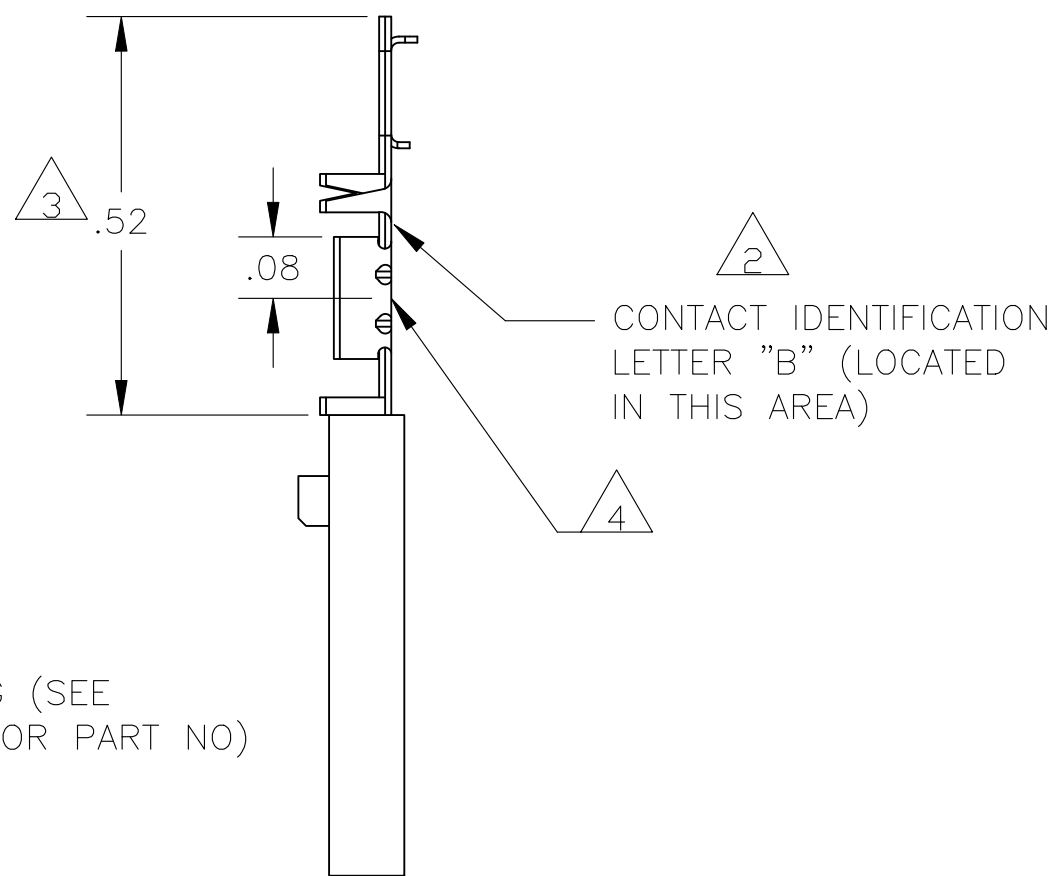


1	CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
2	USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
3	THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
4	POINT OF MEASUREMENT FOR PLATING THICKNESS
5	FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103651
6	ASSEMBLIES ARE JOINED BY THE CARRIER STRIP.ORDER QUANTITY REFLECTS TOTAL NUMBER OF <u>INDIVIDUAL ASSEMBLIES</u> REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
7	POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
8	MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED.055.
9	.000015 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD IN THE TERMINATION AREA, ALL OVER .000050 NICKEL.
10	.000015 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN IN THE TERMINATION AREA, ALL OVER .000050 NICKEL.
11	PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
12	HOUSING MATERIAL: FLAME RETARDANT THERMOPLASTIC, COLOR BLACK.
13	.000015 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN IN THE TERMINATION AREA, ALL OVER .000050 NICKEL.
14	OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

		OBSOLETE		2	2.40	1.198	1-103648-1	12	6-103969-1
		OBSOLETE		2	2.20	1.098	1-103648-0	11	6-103969-0
		OBSOLETE		2	2.00	.998	103648-9	10	5-103969-9
		OBSOLETE		2	1.80	.898	103648-8	9	5-103969-8
		OBSOLETE		2	1.60	.798	103648-7	8	5-103969-7
		OBSOLETE		2	1.40	.698	103648-6	7	5-103969-6
				4	2.39	.598	103648-5	6	5-103969-5
				4	1.99	.498	103648-4	5	5-103969-4
				5	1.99	.398	103648-3	4	5-103969-3
				8	2.40	.298	103648-2	3	5-103969-2
				10	2.00	.198	103648-1	2	5-103969-1
		OBSOLETE		2	2.00	.998	103648-9	10	1-103969-2
		OBSOLETE		2	2.40	1.198	1-103648-1	12	1-103969-1
		OBSOLETE		2	2.20	1.098	1-103648-0	11	1-103969-0
	OBSOLETE		2	2.00	.998	103648-9	10	103969-9	
	OBSOLETE		2	1.80	.898	103648-8	9	103969-8	
	OBSOLETE		2	1.60	.798	103648-7	8	103969-7	
	OBSOLETE		2	1.40	.698	103648-6	7	103969-6	
			4	2.39	.598	103648-5	6	103969-5	
SUPERSEDED BY 5-103969-4			4	1.99	.498	103648-4	5	103969-4	
SUPERSEDED BY 5-103969-3			5	1.99	.398	103648-3	4	103969-3	
SUPERSEDED BY 5-103969-2			8	2.40	.298	103648-2	3	103969-2	
SUPERSEDED BY 5-103969-1			10	2.00	.198	103648-1	2	103969-1	
	PLATING		B	A	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. MAYER		05 NOV 1986		 TE Connectivity	
		CHK P.C.DEJONG		12-11-86			
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD L. SCHEIFFER		NAME	
		0 PLC ± -		PRODUCT SPEC		RCPT ASSY, AMPMODU MTE, SINGLE ROW, .100 C/L, WITH GUIDE RIBS, FOR #22-#26 AWG WIRE SIZE, STRIP FORM	
		1 PLC ± -		108-25034			
		2 PLC ± .02		APPLICATION SPEC		SIZE	
		3 PLC ± .005		114-25026		CAGE CODE	
		4 PLC ± -		WEIGHT		DRAWING NO	
MATERIAL		FINISH		—		A2 00779	
		SEE TABLE		CUSTOMER DRAWING		RESTRICTED TO	
						—	
						SCALE 1:1	
						SHEET 1 of 1	
						REV H2	