




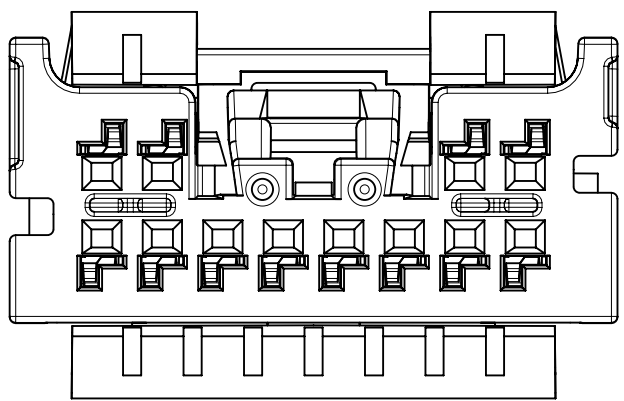


12 CIRCUIT RECEPTACLE
POLARIZATION OPTION A
USCAR COMPATIBLE

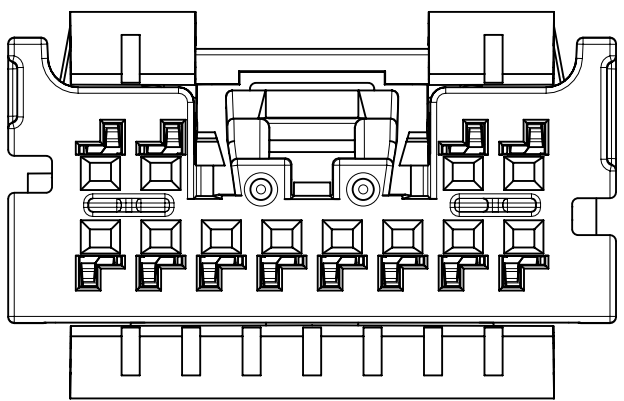


12 CIRCUIT RECEPTACLE
POLARIZATION OPTION B
USCAR COMPATIBLE

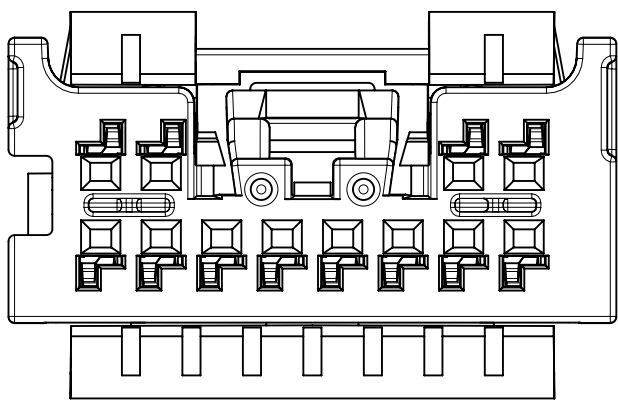


12 CIRCUIT RECEPTACLE
POLARIZATION OPTION C
USCAR COMPATIBLE

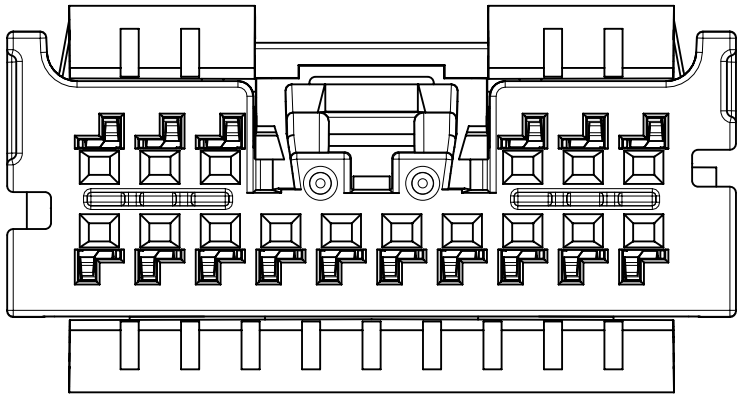


16 CIRCUIT RECEPTACLE
POLARIZATION OPTION A
USCAR COMPATIBLE

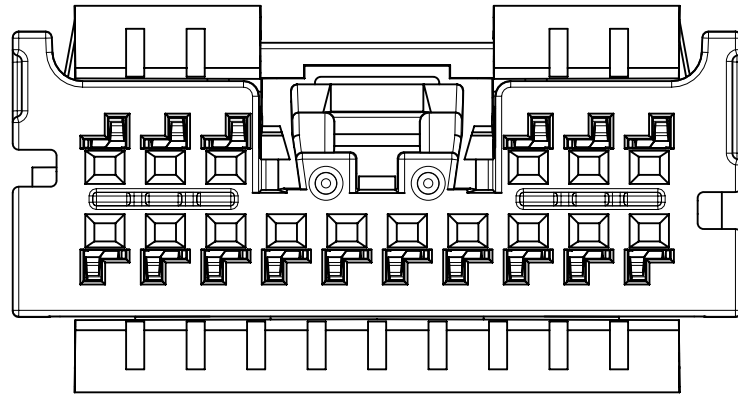


16 CIRCUIT RECEPTACLE
POLARIZATION OPTION B
USCAR COMPATIBLE

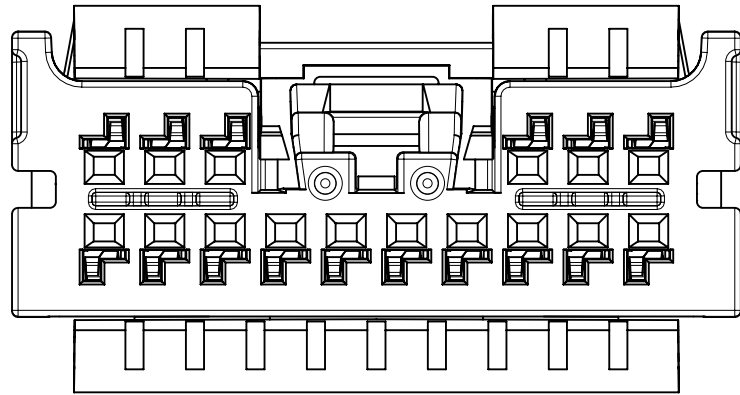


16 CIRCUIT RECEPTACLE
POLARIZATION OPTION C
USCAR COMPATIBLE

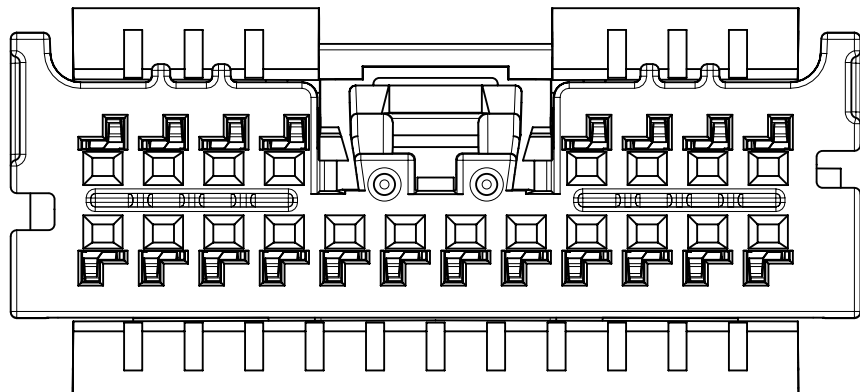


20 CIRCUIT RECEPTACLE
POLARIZATION OPTION A
USCAR COMPATIBLE

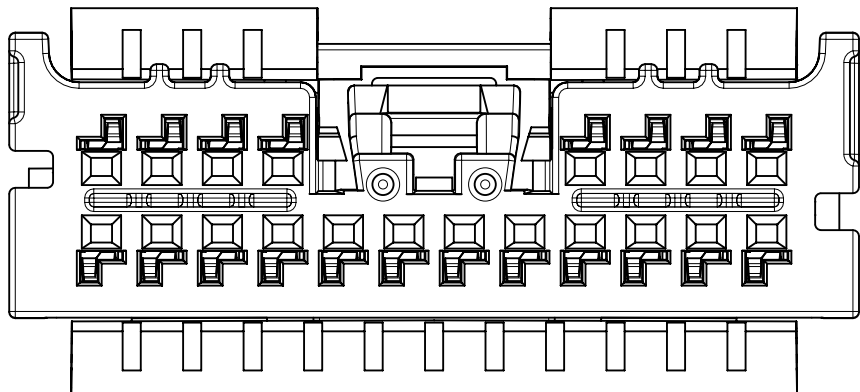


20 CIRCUIT RECEPTACLE
POLARIZATION OPTION B
USCAR COMPATIBLE

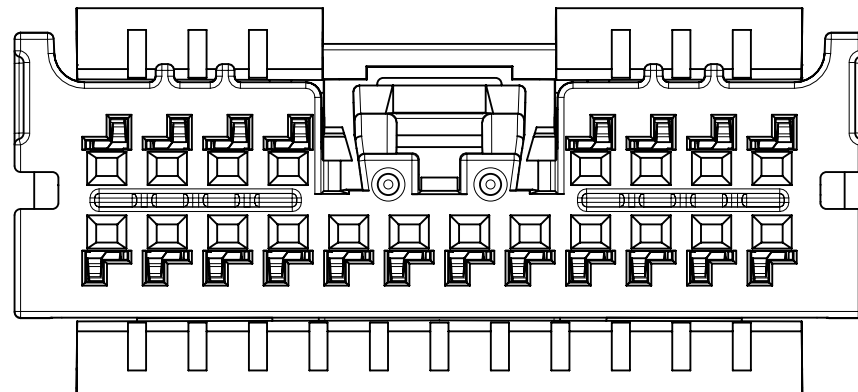


20 CIRCUIT RECEPTACLE
POLARIZATION OPTION C
USCAR COMPATIBLE

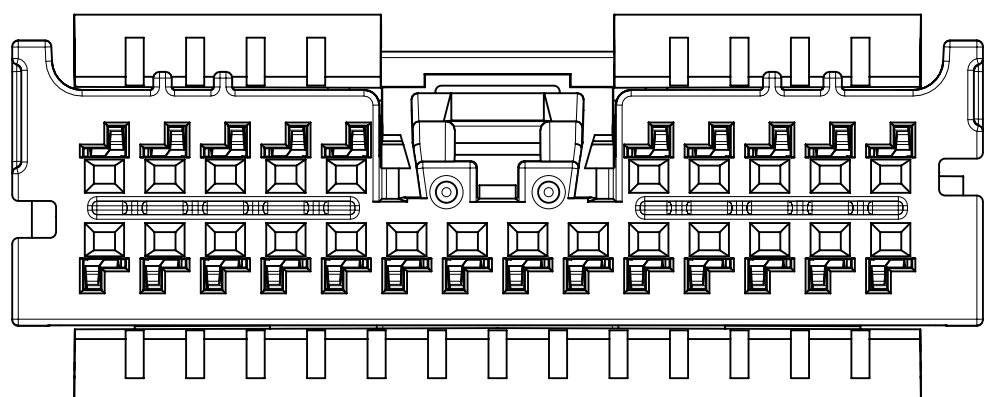


24 CIRCUIT RECEPTACLE
POLARIZATION OPTION A
USCAR COMPATIBLE

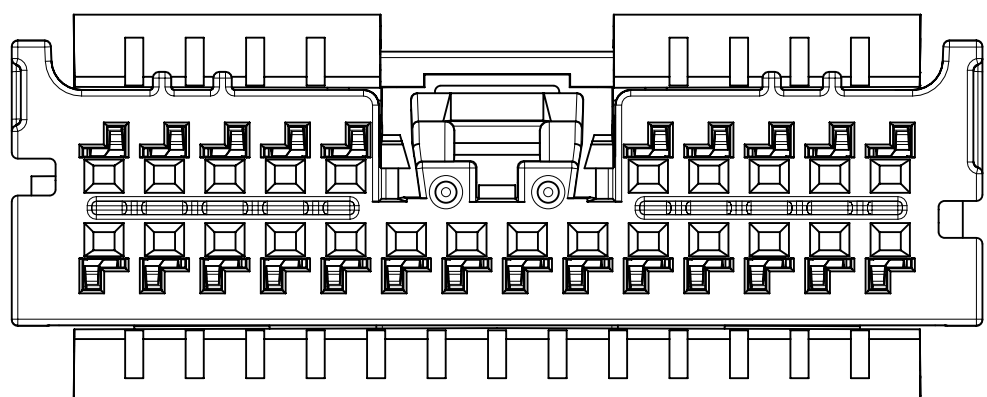


24 CIRCUIT RECEPTACLE
POLARIZATION OPTION B
USCAR COMPATIBLE

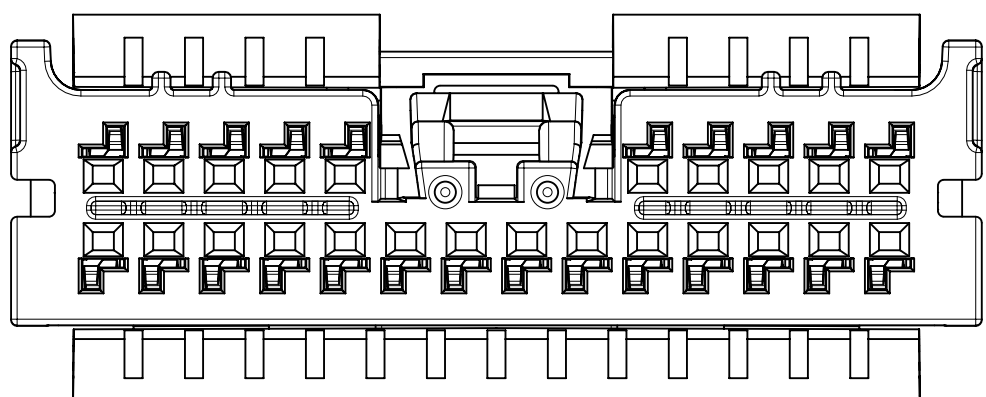

24 CIRCUIT RECEPTACLE
POLARIZATION OPTION C
USCAR COMPATIBLE

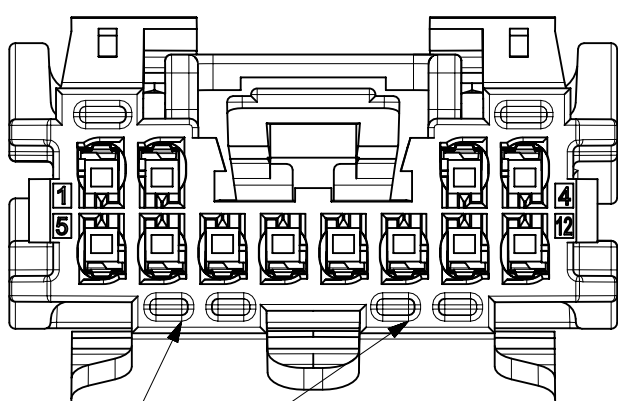


V0 IDENTIFIER

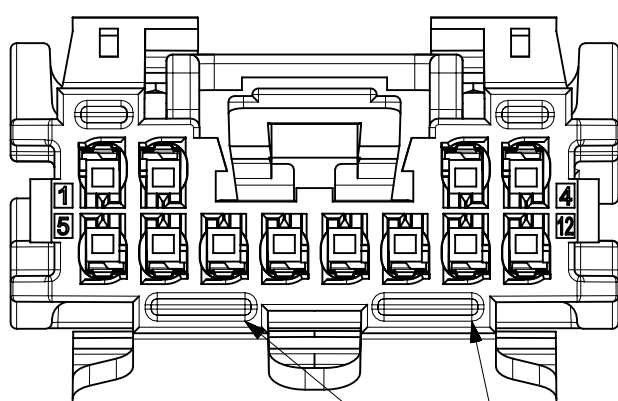




HB IDENTIFIER

NOTES: VALID UNLESS OTHERWISE SPECIFIED

1. GENERAL:
- a. APPLICATION SPECIFICATION SEE: 2065230000-AS
 - b. PRODUCT SPECIFICATION SEE: 2065230000-PS
 - c. PACKAGING SPECIFICATION PER MOLEX DRAWING: PK-31301-538
 - d. PARTS MUST BE IN COMPLIANCE TO MOLEX CHEMICAL SUBSTANCES FOR PRODUCTS AND PACKAGING SPECIFICATION: QEHS-699000-301
 - e. DATA MUST BE SUBMITTED UNDER THE MOLEX PART NUMBER TO IMDS (COMPANY ID#13255)
 - f. FLAMMABILITY REQUIREMENT
 - 1. UL 94 HB (SERIES NUMBER 206523)
 - 2. UL 94 V0 (SERIES NUMBER 207584)
2. DESIGN -
- 2.1 RECEPTACLE HOUSING:
- a. MATERIAL: PBT-GF7.5%
 - b. COLOR: SEE PART TABLE
- 2.2 CPA:
- a. MATERIAL: PA6-GF60%
 - b. COLOR: RED
3. DESIGN - GEOMETRY:
- a. THIS IS A 100% CAD GENERATED PART. THE CAD MATHEMATICAL DATA IS THE MASTER FOR THIS PART. FOR DIMENSIONAL OR ANY INFORMATION NOT SHOWN ON THIS DRAWING, ANALYZE THE CAD MODEL
 - b. GEOMETRIC DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 2009
 - c. EDGES AND UNDIMENSIONED DETAILS PER ISO13175
 - d. CORNERS SHOWN AS SHARP TO BE R 0.2 MAX
 - e. LETTERING SHALL BE 0.1 MAX RAISED IN 0.15 MAX RECESS PAD AND NOT PROTRUDE THE SURFACE. THIS INCLUDES RECYCLING CODE, PLANT AND CAVITY ID, VENDOR ID, CIRCUIT ID, AND SERIES NUMBER

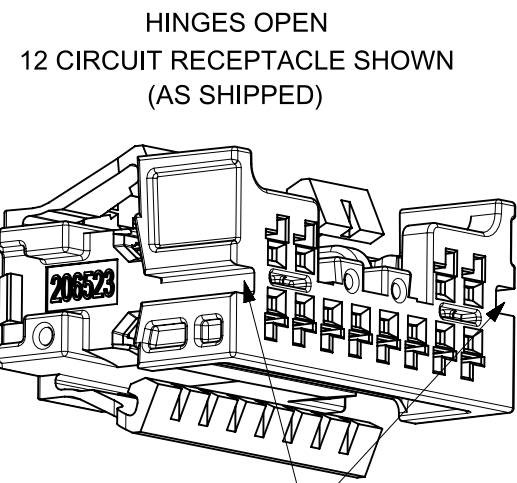

POLARIZATION FEATURE LOCATIONS

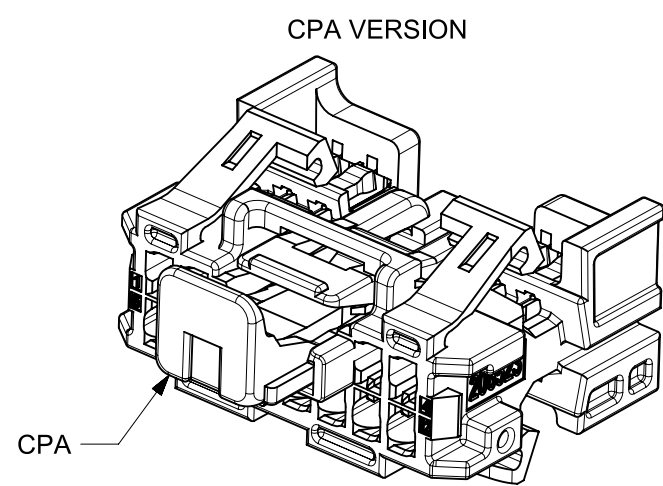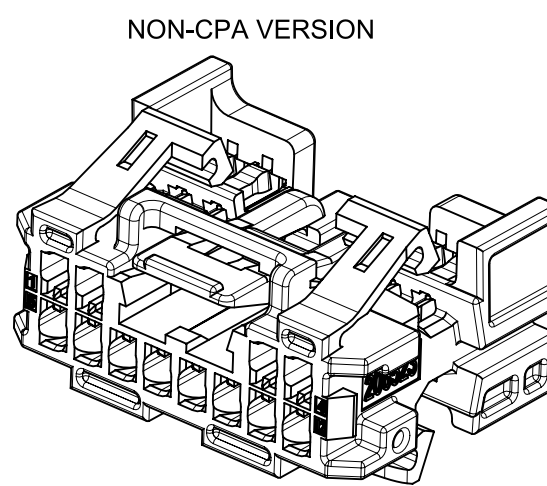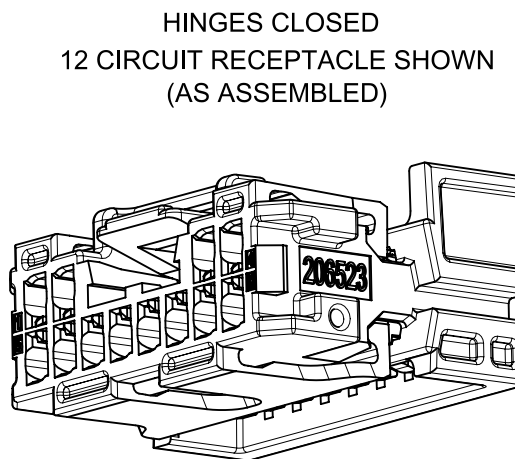


A8	REFRESH DRAWING VIEW
A7	PAGE 2: UPDATED CTX50 UNSEALED RCPT TERMINAL PART NUMBER AND STATUS
A6	PAGE 2: UPDATED CTX50 SMALL GRIP PNs ON BOM
A5	PAGE 1: ADDED V0 AND HB IDENTIFIER VIEW
A4	PAGE 2: UPDATED 12 & 16CKT V0 WITH & WITHOUT CPA TO AVAILABLE
A3	PAGE 1: ADDED NOTES 2.1 & 2.2
A2	PAGE 2: UPDATED HB PART AVAILABILITY IN THE TABLE
A1	UPDATED RESTRICTION FROM INTERNAL TO GENERAL MARKET
REV	PAGE 3: ADDED VERTICAL PITCH REFERENCE DIMS ON CAVITIES
REV	DESCRIPTION

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
	0
	0
	0
DIVISIONAL SYMBOLS	
	0
	0
	0
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

MM	NTS
GENERAL TOLERANCES (UNLESS SPECIFIED)	
ANGULAR TOL	± 0.5°
4 PLACES	±
3 PLACES	±
2 PLACES	±
1 PLACE	±
0 PLACES	±
STATUS: Production	
DRWN: Leo Li	
CHK'D: Ringo Hu	
APPR: wolffw	
THIRD ANGLE PROJECTION	
DRAWING	
SERIES	
A1-SIZE	


molex			
MINI50 GEN II RECEPTACLE SALES DRAWING			
PRODUCT CUSTOMER DRAWING			
DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
2065230000	PSD	000	A8
MATERIAL NUMBER	CUSTOMER	SHEET NUMBER	
SEE CHART	GENERAL MARKET	1 OF 3	

NON-CPA VERSION SIDE VIEW

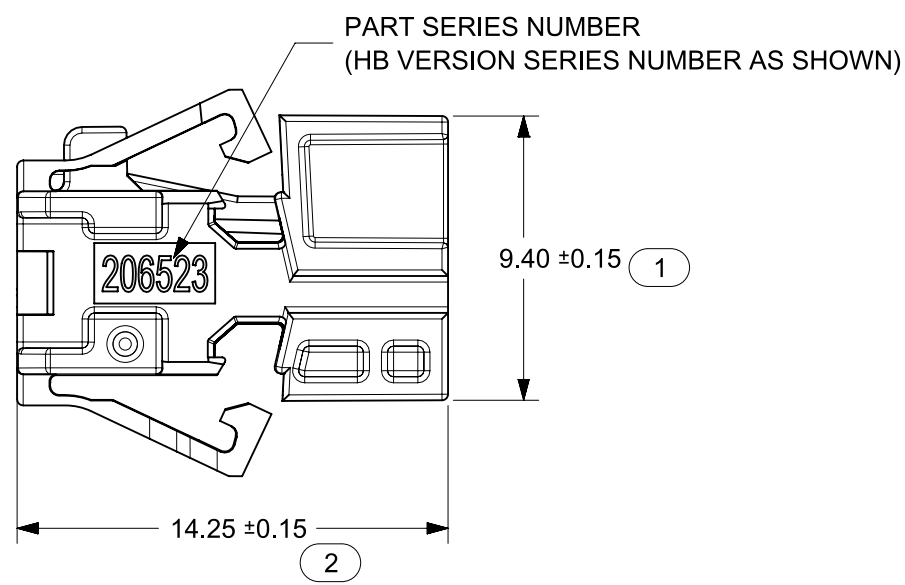


DIMENSIONS IN THIS VIEW ARE SHARED BOTH CPA AND NON-CPA VERSION


12 CIRCUIT RECEPTACLE
NON-CPA VERSION

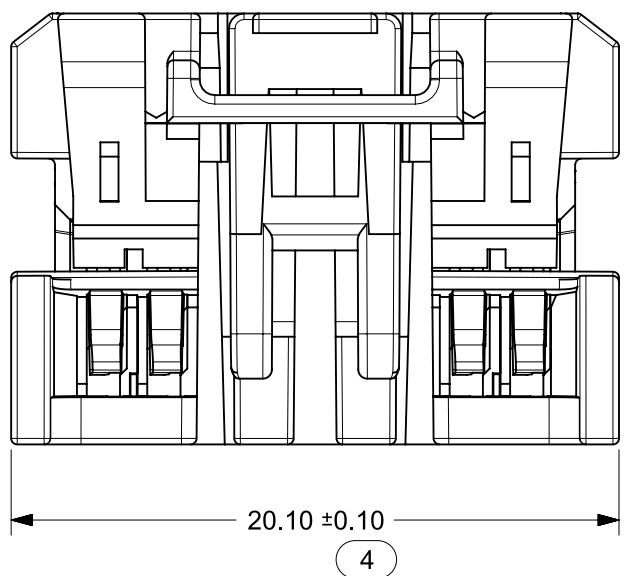


16 CIRCUIT RECEPTACLE
NON-CPA VERSION

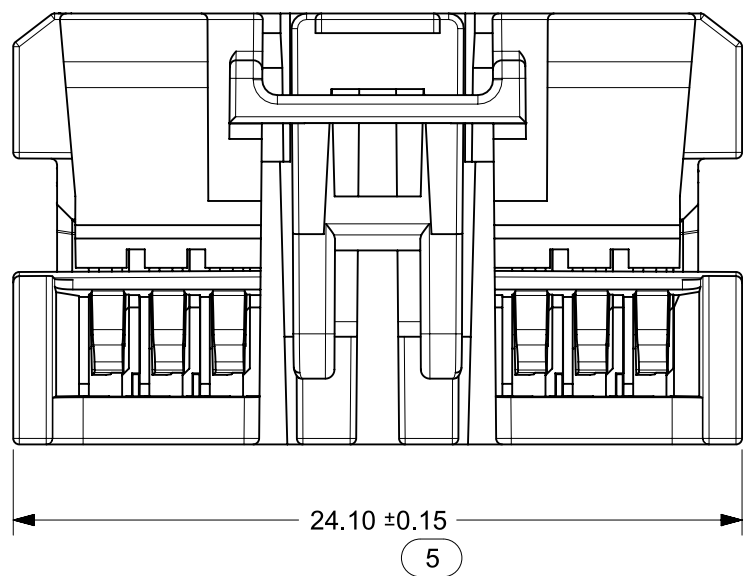


20 CIRCUIT RECEPTACLE
NON-CPA VERSION

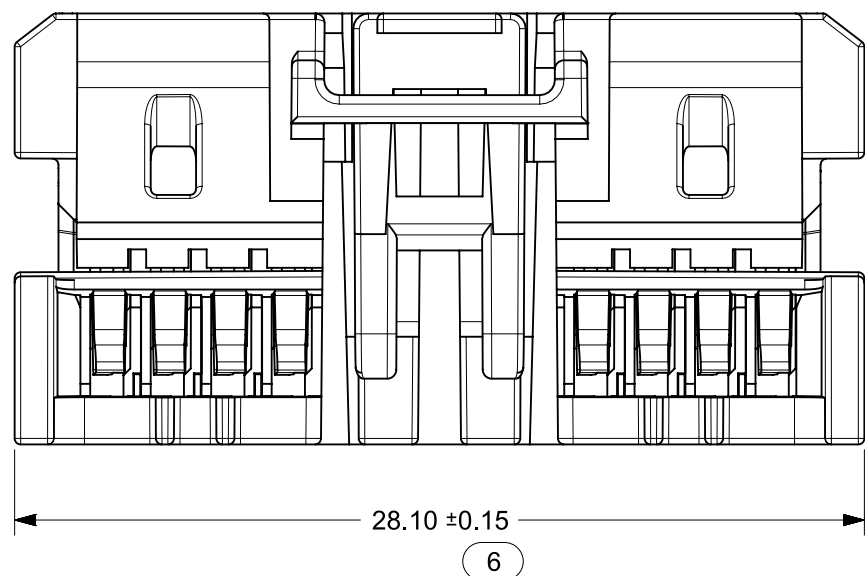

24 CIRCUIT RECEPTACLE
NON-CPA VERSION

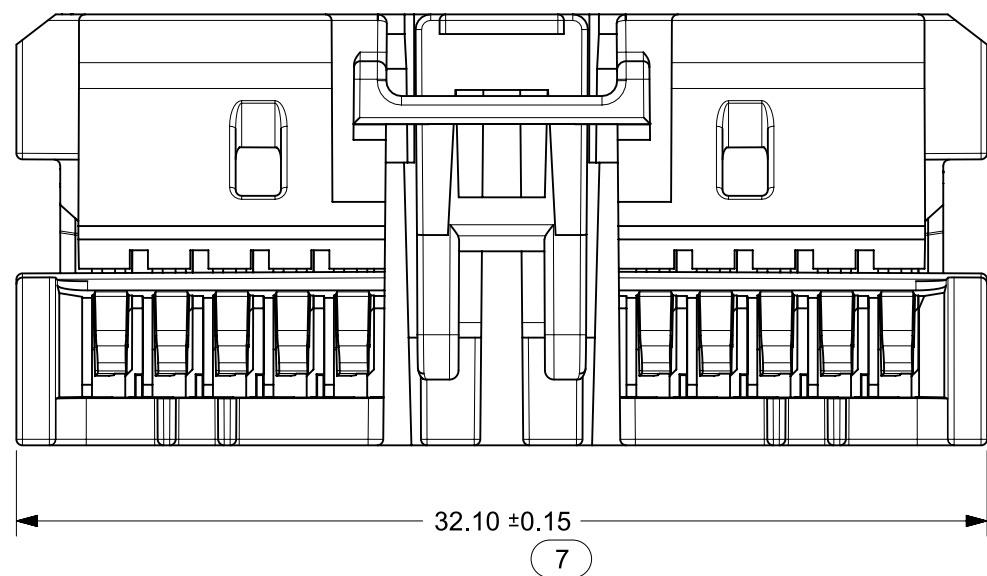


CPA VERSION SIDE VIEW

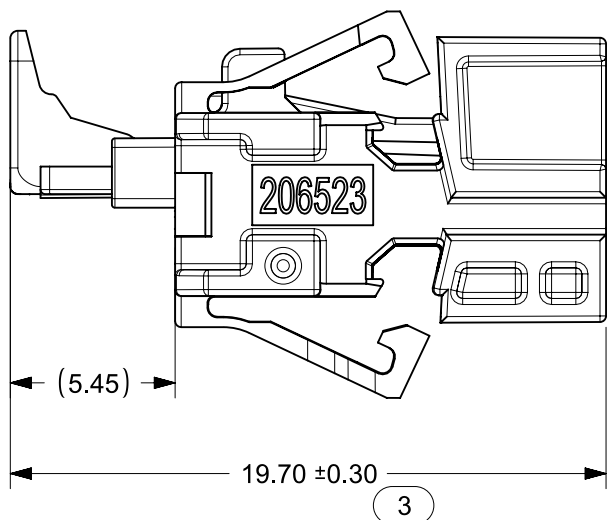


DIMENSION IN THIS VIEW APPLY FOR CPA VERSION ONLY
REFERRING TO THE FOLLOWING P/Ns
2065231121/1122/1123/1161/1162/1163/1201/1202/1203/1241/1242/1243
2075840121/1122/1123/1161/1162/1163/1201/1202/1203/1241/1242/1243


12 CIRCUIT RECEPTACLE
CPA VERSION

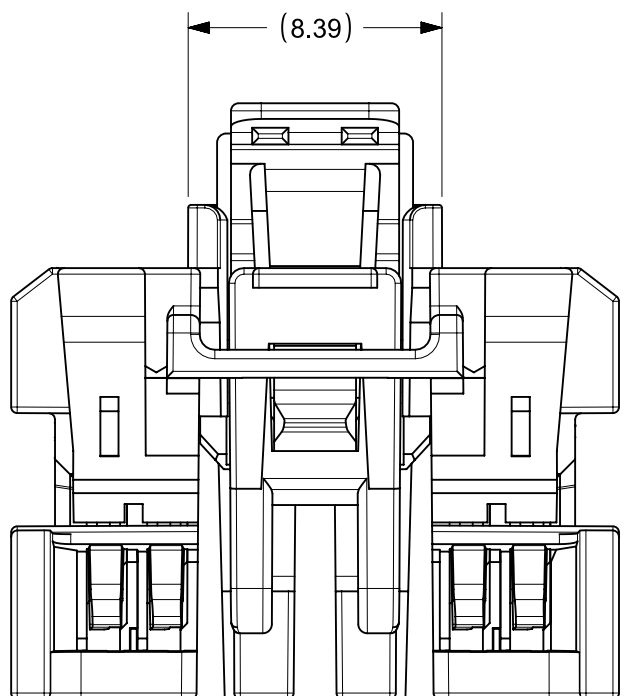









16 CIRCUIT RECEPTACLE
CPA VERSION

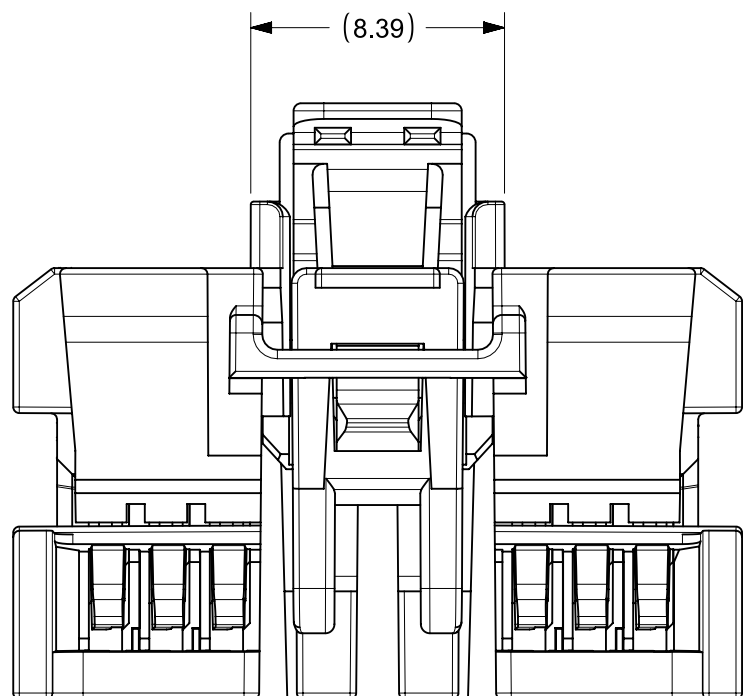


20 CIRCUIT RECEPTACLE
CPA VERSION

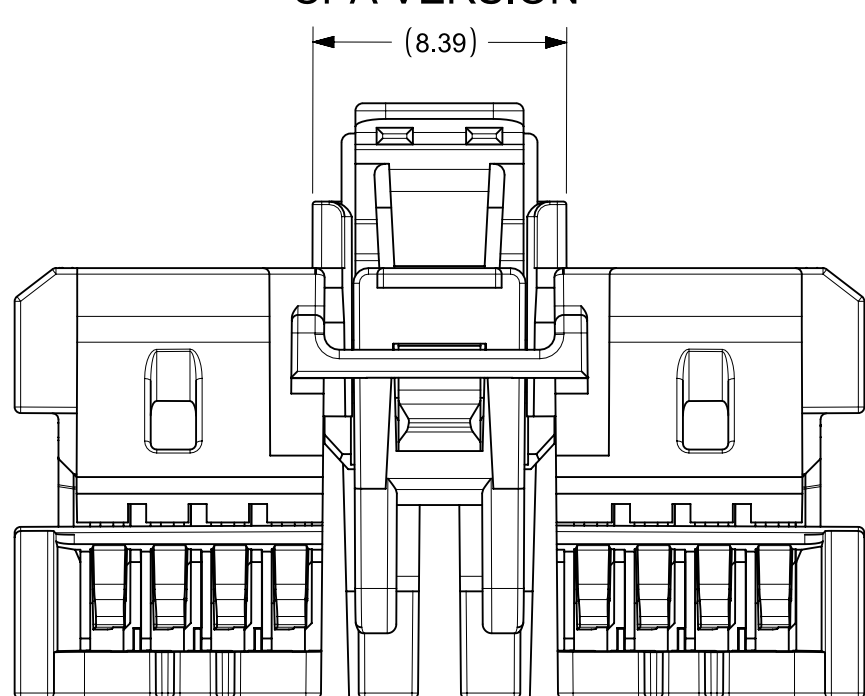


24 CIRCUIT RECEPTACLE
CPA VERSION

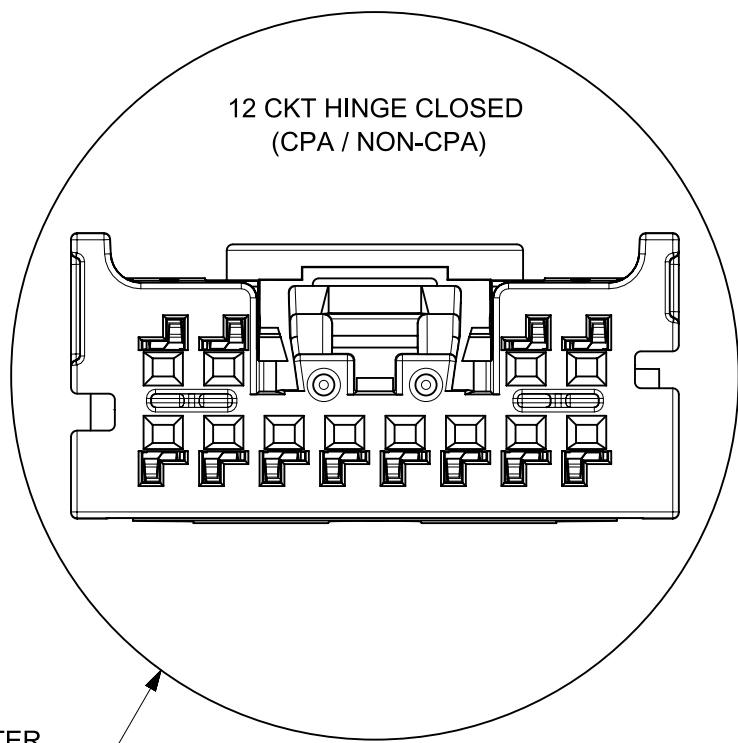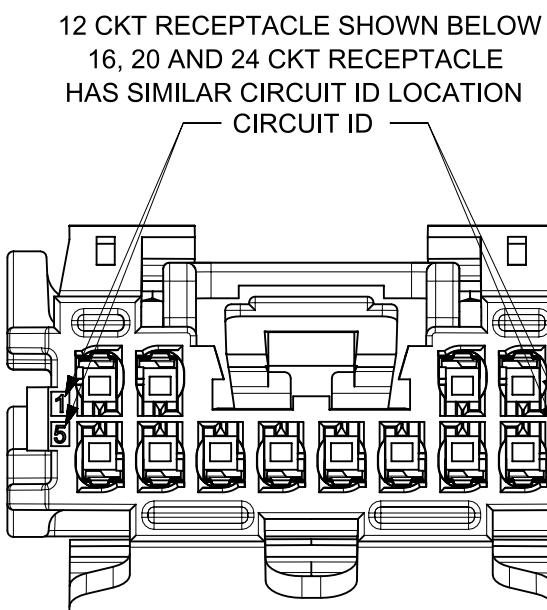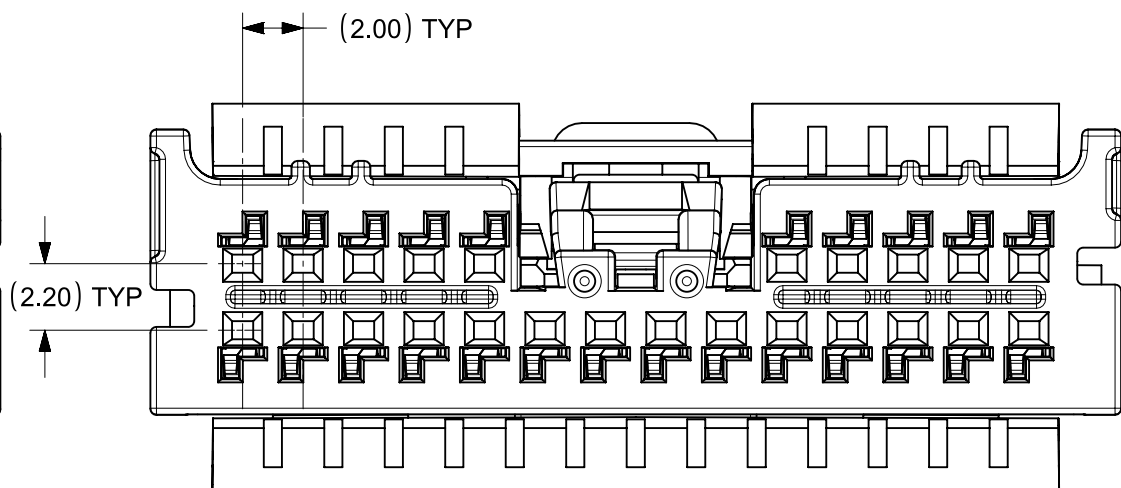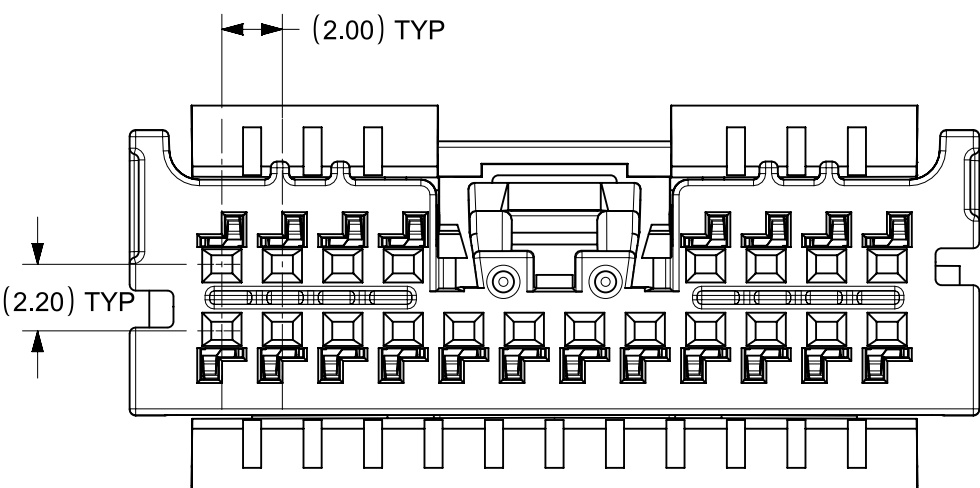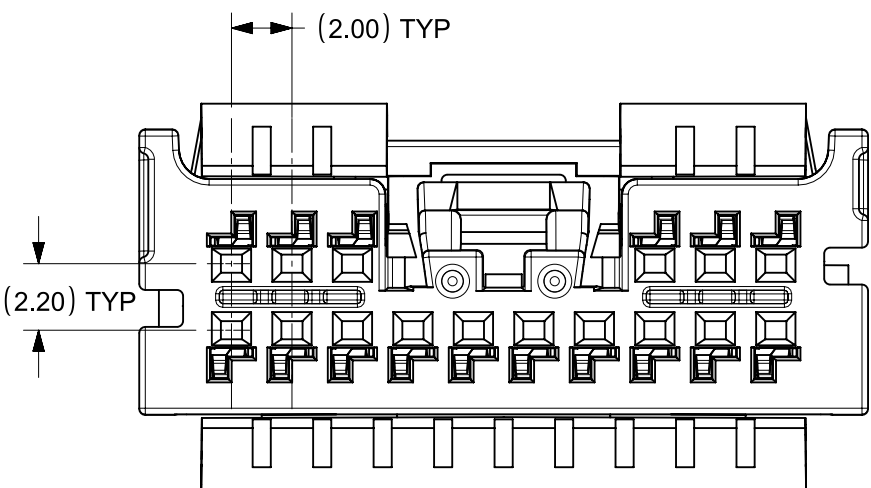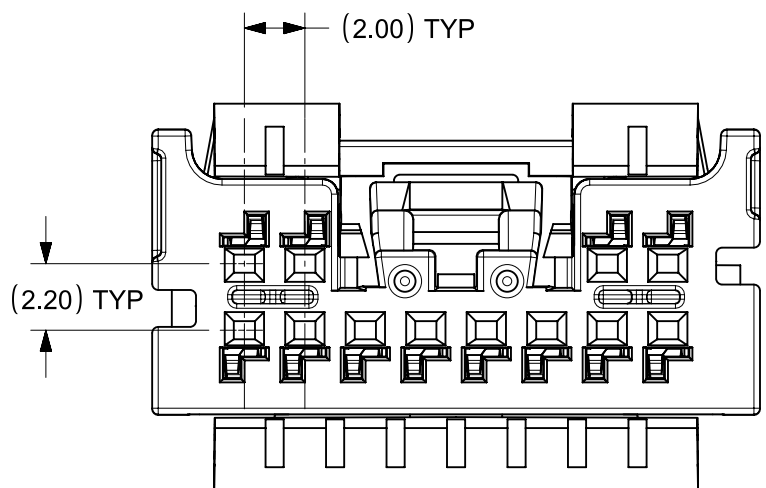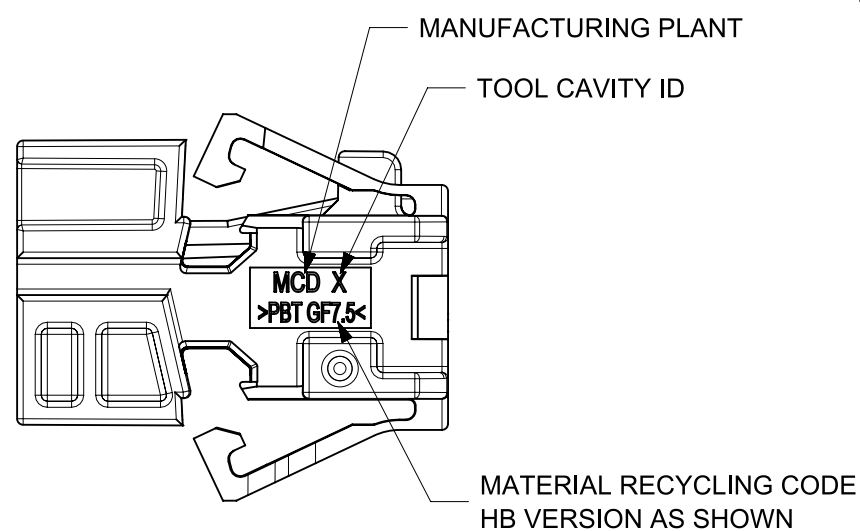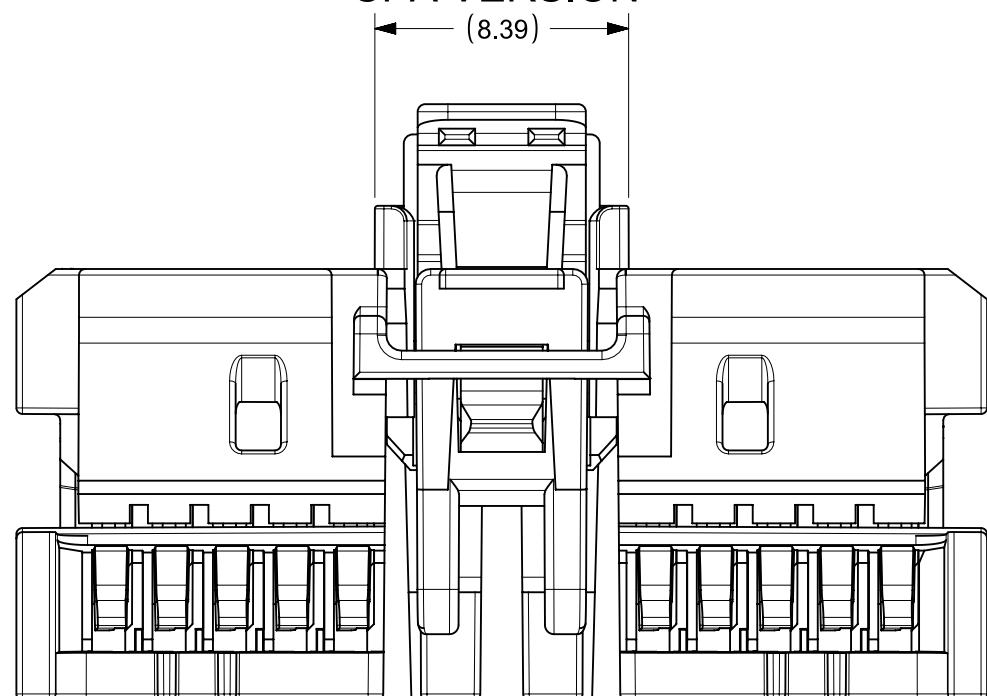


PASS THRU DIAMETER
24.06
1mm ADDITIONAL CLEARANCE
ADDED TO TIGHTEST FIT CIRCLE

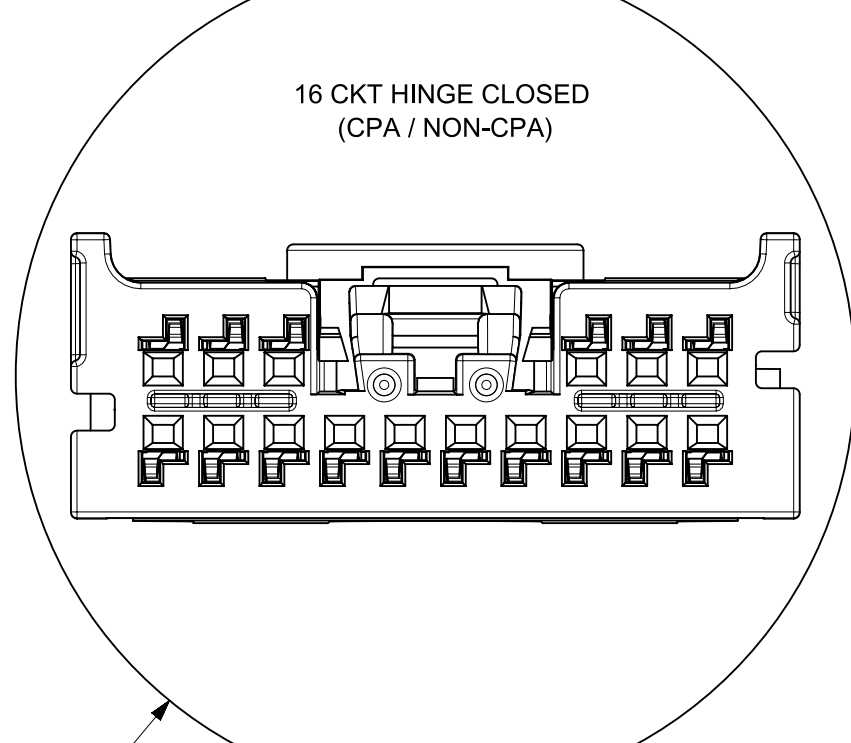

PASS THRU DIAMETER
27.75
1mm ADDITIONAL CLEARANCE
ADDED TO TIGHTEST FIT CIRCLE

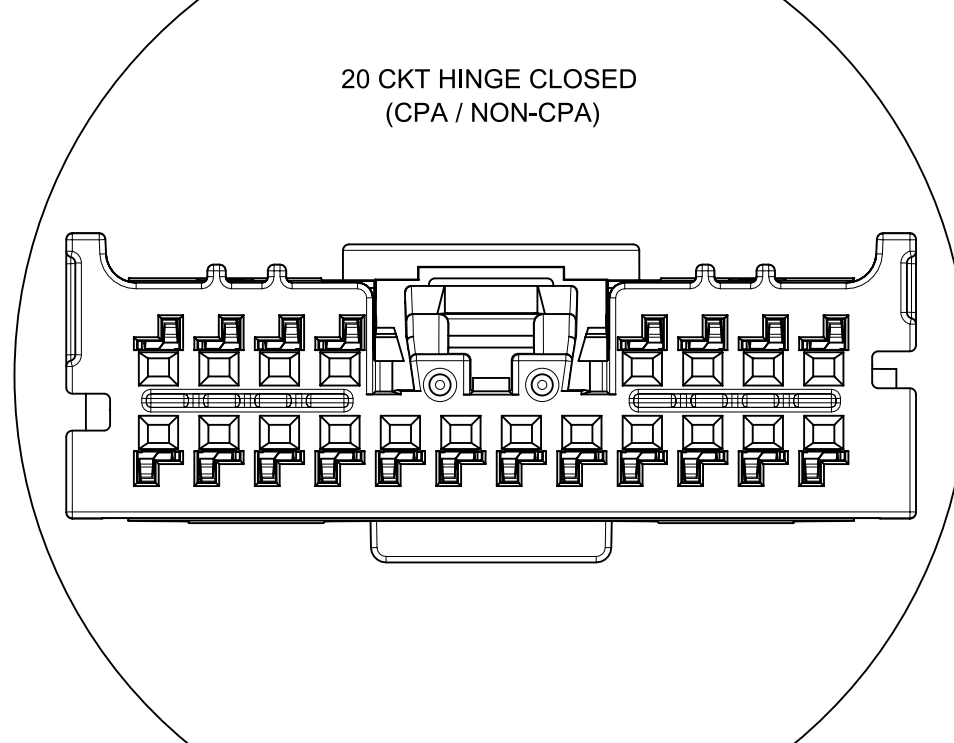


PASS THRU DIAMETER
31.52
1mm ADDITIONAL CLEARANCE
ADDED TO TIGHTEST FIT CIRCLE

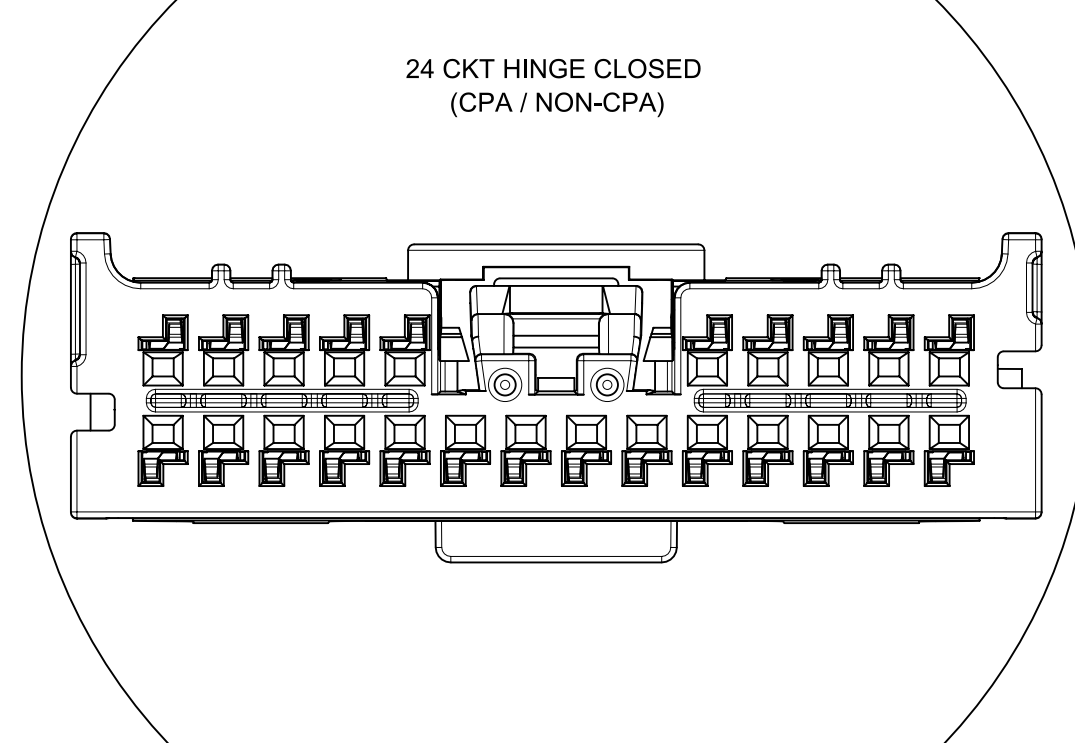

PASS THRU DIAMETER
35.35
1mm ADDITIONAL CLEARANCE
ADDED TO TIGHTEST FIT CIRCLE

HINGE CLOSED

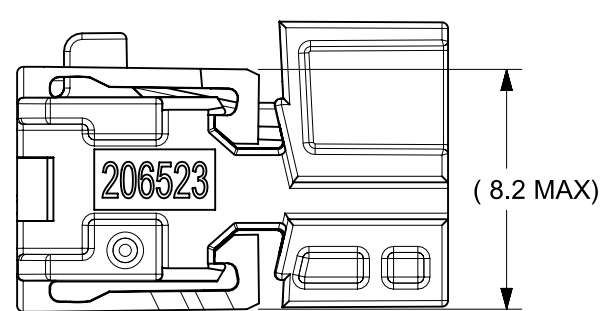

FUNCTIONAL SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: REFER TO REVISION COLUMN	
DIMENSION UNITS		SCALE			
MM		NTS			
GENERAL TOLERANCES (UNLESS SPECIFIED)					
ANGULAR TOL		± 0.5°			
4 PLACES		±			
3 PLACES		±			
2 PLACES		±			
1 PLACE		±			
0 PLACES		±			
DIVISIONAL SYMBOLS					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION			
		DRAWING			
		A1-SIZE			
		SERIES			
		206523			
		MATERIAL NUMBER			
		SEE CHART			
		CUSTOMER			
		GENERAL MARKET			
		SHEET NUMBER			
		3 OF 3			