

NUMBER 316080





3rd ANGLE PROJECTION

METRIC

DIMENSIONS IN MILLIMETERS. DO NOT SCALE PRINT

PRINT DIST

VIEW A
回路番号
CIRCUIT NO
AMPマーク
シリーズマーク
SERIES MARK

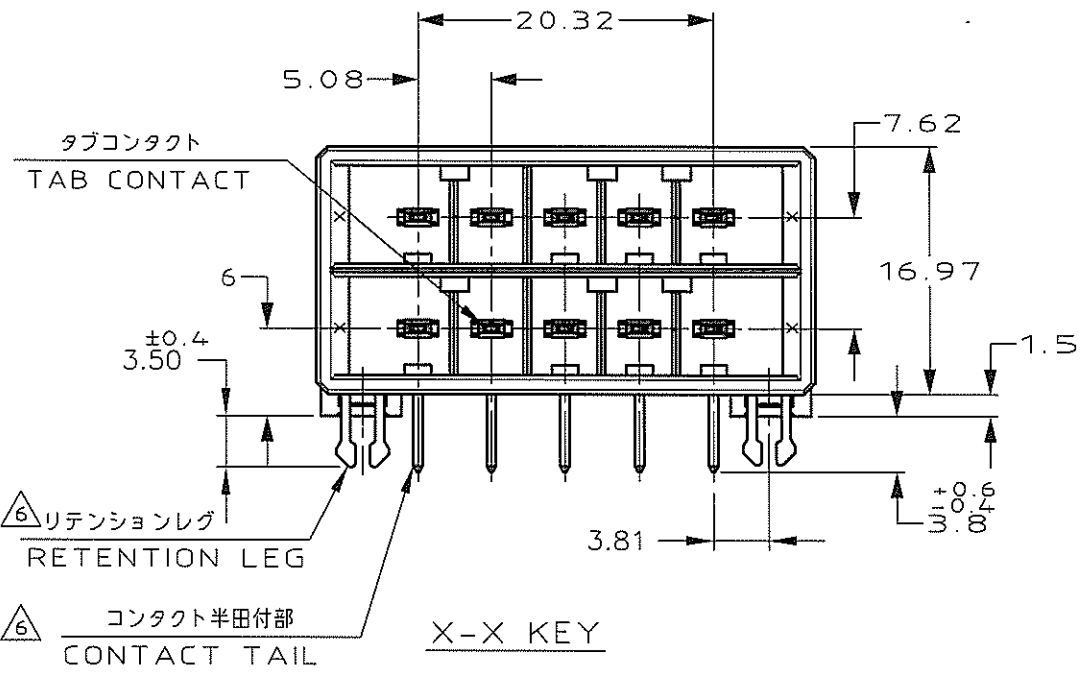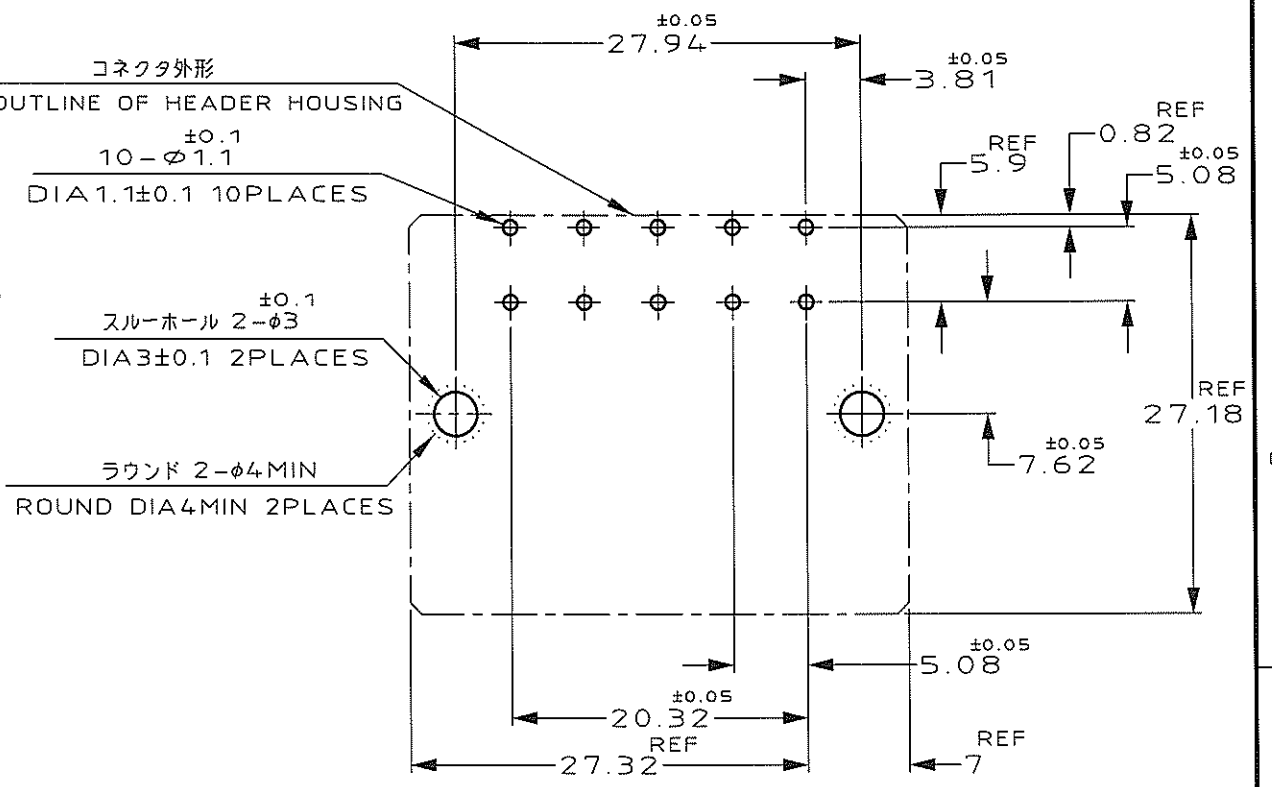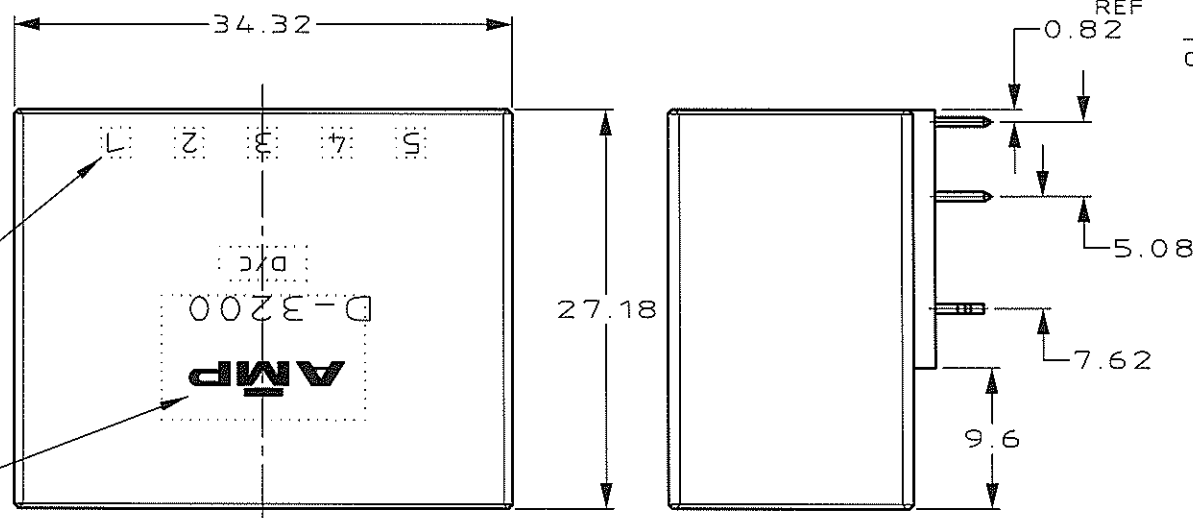

推奨基板取付け穴寸法
PC 基板厚: 1.6±0.1
(非累積公差)
(コネクタ搭載面)

RECOMEND PC BOARD HOLE PATTERN
PC BOARD THICKNESS: 1.6±0.1
(NOT ACCUMULATE TOLERANCE)
(CONNECTOR MOUNT SIDE)

NOTES

- MATERIAL: HOUSING: GLASS FILLED THERMO PLASTIC, POLYESTER (94V-0), COLOR: BLACK
CONTACT: COPPER ALLOY
RETENTION LEG: COPPER ALLOY
- FINISH (CONTACT AREA): 0.38µm PdNi & Au PLATING OVER NICKEL
- FINISH (CONTACT AREA): 0.76µm PdNi & Au PLATING OVER NICKEL
- FINISH (CONTACT AREA): 2.0 PLATED OVER NICKEL
- FINISH (RETENTION LEG): TIN LEAD PLATED (CONTACT TAIL)
- FINISH (RETENTION LEG): TIN PLATED (CONTACT TAIL)

KEYING LOCATION	A ROW KEYING	B ROW KEYING	FINISH	製品番号	PART NO.
B ROW			△ 5 4		3-316080-5
A ROW	X	Y	△ 6 3		3-316080-3
			△ 6 2		3-316080-2
B ROW		Y	△ 6 4		2-316080-5
A ROW	Y	Y	△ 6 3		2-316080-3
			△ 6 2		2-316080-2
B ROW		X	△ 6 4		1-316080-5
A ROW	X	X	△ 6 3		1-316080-3
			△ 6 2		1-316080-2

C	REVISED PER ECR-25-250788	F.Z	R.B	16 JAN 2025
B3	REVISED PER ECO-11-005030	RK	HMR	25 MAR 11
LTR	REVISION RECORD	DR	CHK	DATE

TE Connectivity

10 POS DOUBLE ROW
HORIZONTAL HDR ASS'Y FOR DYNAMIC D-3200

WIRE RANGE: mm²(AWG) - mm²
INSULATION DIA: mm
MATERIAL: SEE NOTE 注記参照
FINISH: SEE NOTE 注記参照

NAME: 10 POS DOUBLE ROW HORIZONTAL HDR ASS'Y FOR DYNAMIC D-3200

一般公差 (GENERAL TOLERANCE): 10mm ±0.3, 10mm 3mm ±0.4, 30mm 100mm ±0.45, 角 ±0.3

SIZE: A3, LOC: J, NUMBER: C-316080

SCALE: 2-1, REV: C, SHEET: 1 OF 1