
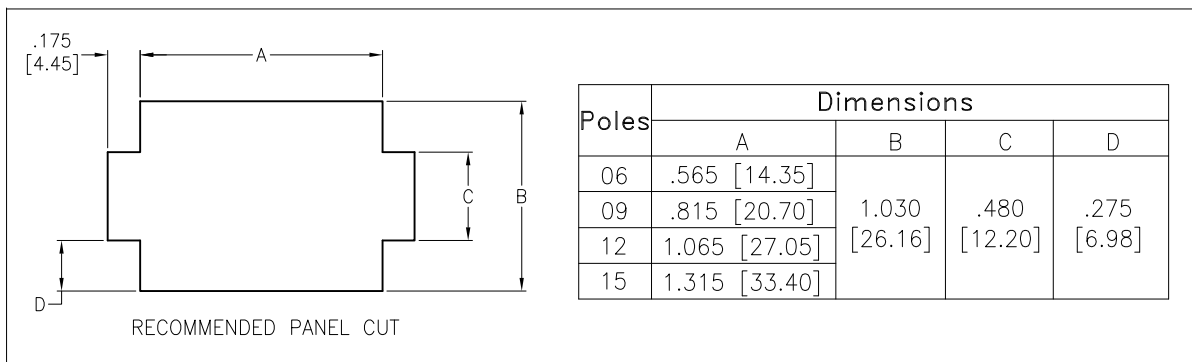





APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	2/21/20	

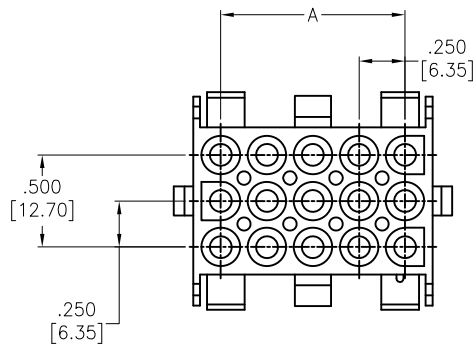

Poles	Dimensions			
	A	B	C	D
06	.565 [14.35]	1.030 [26.16]	.480 [12.20]	.275 [6.98]
09	.815 [20.70]			
12	1.065 [27.05]			
15	1.315 [33.40]			

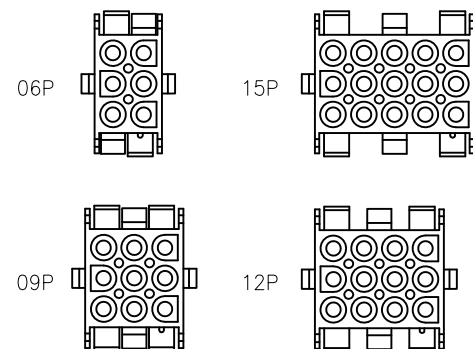

Poles	Dimensions			
	A	B	C	D
06	.250 [6.35]	.550 [13.97]	.799 [20.30]	1.128 [28.65]
09	.500 [12.70]	.807 [20.50]	.807 [20.50]	1.130 [28.70]
12	.750 [19.05]	1.059 [26.90]	.807 [20.50]	1.134 [28.80]
15	1.000 [25.40]	1.311 [33.30]	.803 [20.40]	1.134 [28.80]

SPECIFICATIONS:

Material:

Insulator: Nylon66, rated UL 94V-2

Insulator color: Natural

Electrical:

Current rating: 06~15P: 9 Amp max (With UL1007, 16AWG)

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 2,900 VAC for 1 minute

Temperature Rating:

-40°C to +105°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES

.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS		DATE
DRAWN	LH	2/21/20
CHECKED	AT1	2/21/20
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE .250 [6.35MM] PITCH CONNECTOR, HOUSINGS, FEMALE, VERTICAL		
SIZE X	PART NO. DME-F2-XX-SQ	REV. -
REF: S00124T	SCALE: NTS	SHEET 1 OF 1