
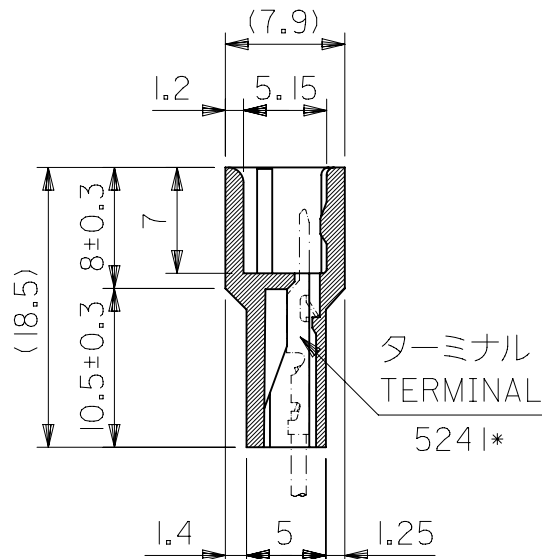
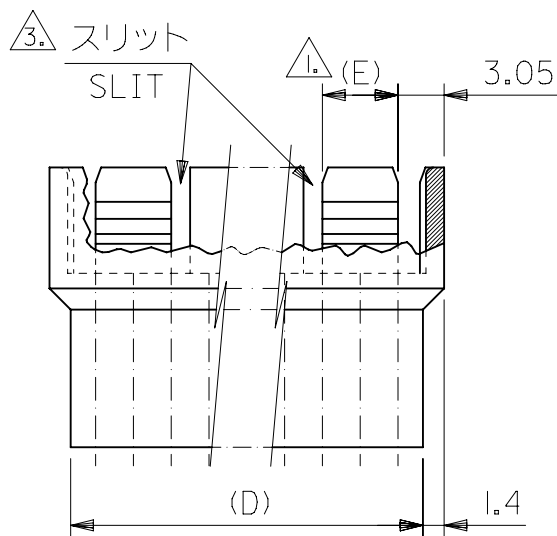


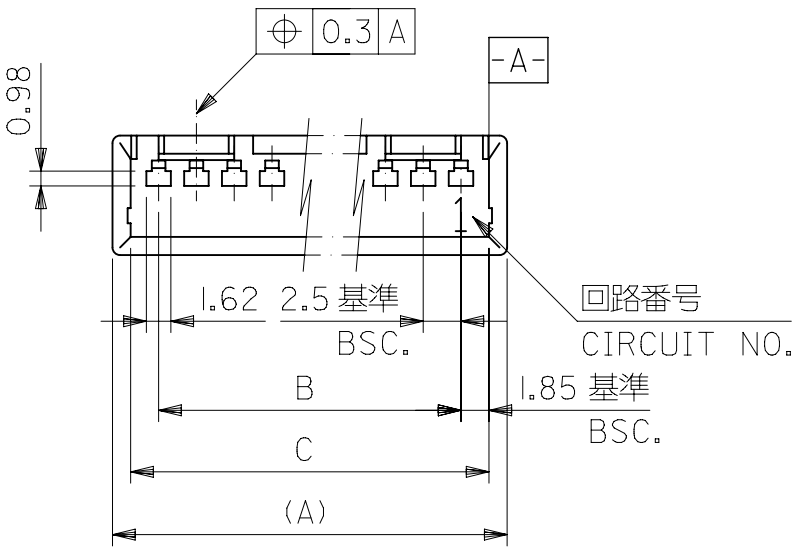

ナイロン66, 94V-0
NYLON66,94V-0
色: オフホワイト
COLOR:OFF WHITE

注)
NOTE.

1. フリクションロック構成:
FRICTION LOCK CONFIGURATION:
4極までは1箇所
4CKT AND UNDER - 1LOCK
5極以上は2箇所
5CKT AND OVER - 2LOCKS

2. 嵌合相手: 5102-N
MATES WITH HOUSING:5102-N

3. スリット構成:
SLIT CONFIGURATION:
4極以下はなし
4CKT AND UNDER - NO SLIT
5及び6極は1箇所
5 AND 6CKTS - 1 SLIT
7極以上は2箇所
7CKT AND OVER - 2 SLITS

29-11-0143	5240-141	32.5	36.2	38.6	5	35.8	14
↑ -0123	↑ -121	27.5	31.2	33.6	5	30.8	12
↑ -0103	↑ -101	22.5	26.2	28.6	5	25.8	10
↑ -0093	↑ -091	20	23.7	26.1	5	23.3	9
↑ -0083	↑ -081	17.5	21.2	23.6	5	20.8	8
↑ -0073	↑ -071	15	18.7	21.1	5	18.3	7
↑ -0063	↑ -061	12.5	16.2	18.6	5	15.8	6
↑ -0053	↑ -051	10	13.7	16.1	3.75	13.3	5
↑ -0043	↑ -041	7.5	11.2	13.6	7.5	10.8	4
↓ -0033	↓ -031	5	8.7	11.1	5	8.3	3
29-11-0023	5240-021	2.5	6.2	8.6	2.5	5.8	2
EDP.NO.	ENG.NO.	B	C	(A)	(E)	(D)	極数 CKT.

GENERAL TOLERANCES (UNLESS SPECIFIED)				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: REMOVED OBSOLETE PART NUMBERS AS PER PCN#514486.			
DIMENSION	UNITS	SCALE		DIMENSION	UNITS	SCALE		EC NO: 774109	
0.25	UNDER	UNDER	±0.2	mm	2:1			DRWN: RAVINR1	2023/12/27
0.25	OVER	0.5	±0.2	GENERAL TOLERANCES (UNLESS SPECIFIED)				CHK'D: GGA	2024/01/29
0.5	OVER	1.0	±0.2	ANGULAR TOL ± °				APPR: GGA	2024/01/29
1.0	OVER	10	±0.2	4 PLACES	±			INITIAL REVISION:	
10	OVER	30	±0.25	3 PLACES	±			DRWN: KKOHAMA	2000/03/27
30	OVER		±0.3	2 PLACES	±			APPR: TKANEKO	2016/02/26
ANGULAR ± 3 °				1 PLACE	±			DOCUMENT NUMBER	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				0 PLACES	±			SD-5240-N1	
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				DOC TYPE	DOC PART
				THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	REVISION
					A3-SIZE	5240	SEE CHART	GENERAL MARKET	1 OF 1