


PRODUCT NUMBER
10118528-6XX-06LF

PLATING _____
6 = 0.38μm Au/GXT FULL PLATED

ROHS COMPATIBLE PRODUCT
SEE NOTE 5
NB OF POSITIONS PER ROW

PIN STYLE	DIM "A"	DIM "B"
01	4.00	4.00
02	5.90	5.90
03	8.40	8.40
04	9.80	9.80
05	3.25	3.25

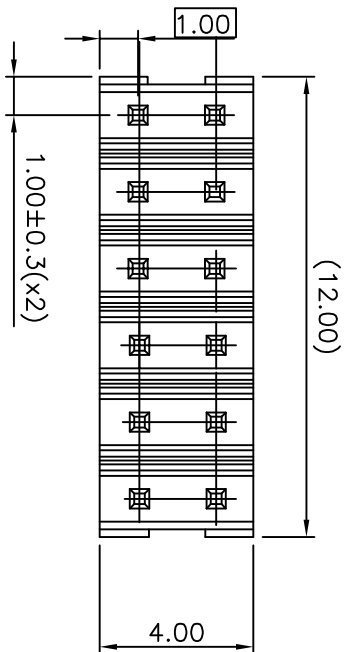

KIT NUMBER	MADE FROM	QTY
10118528-0003LF	10118528-603-06LF	144


- PACKAGING NOTE 6

NOTES:

1. MATERIAL HOUSING: HIGH TEMP. THERMOPLASTIC UL 94V-0, COLOR BLACK
2. MATERIAL TERMINAL: COPPER ALLOY
3. 7N MIN. PIN RETENTION IN EITHER DIRECTION.
4. STANDARD PACKAGING IN PLASTIC BOX
5. ROHS COMPATIBLE PRODUCT SPECIFICATIONS

Q - PLATING:

- "LF" MEANS THE PRODUCT IS LEAD-FREE, 2µm MINIMUM MATTE TIN OVER 1.27µm MINIMUM NICKEL UNDERPLATE.
 - b - MANUFACTURING PROCESS COMPATIBILITY
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C ±5°C SOLDER BATH TEMPERATURE FOR 5 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm MIN THICK CIRCUIT BOARD.
 - COMPATIBLE TO REFLOW PROCESS 260°C MAX FOR 30 SECONDS
 - c - LABELLING:
 - MEETS PACKAGING SPECS AS PER GS-14-920
 - d - LEGAL STATEMENT: SEE GS-47-0004
- PACKAGING IN PLASTIC BOX : 144PCS

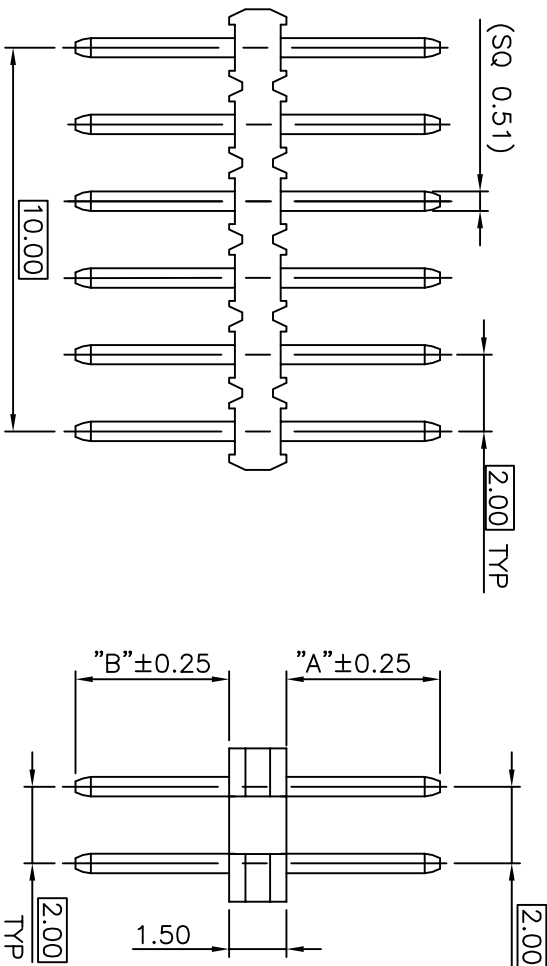

mat'l. code		surface		tolerance		projection		product family	
		ISO 302		✓ ISO 406 ISO 101				MINITEK	
ltr ecn no		dr		date		tolerances unless otherwise specified		title	
A F11-0098		LMU		11.09.13		.X ±0.3		UNSH HEADER	
B F12-0078		JCO		12.06.26		.XX ±0.13		2.00 mm VERTICAL TMT	
C F12-0085		JCO		12.12.07		.XXX ±0.05		dwg no	
D B-19190		LMU		14.10.24		dr L.MULIN		sheet 1 of 1	
						eng J.COMPAIGNON		size A3	
						chr			
						qadd		JM.C	
								06.06.11	
sheet		revision						type	
index		sheet						CUSTOMER Drawing	