

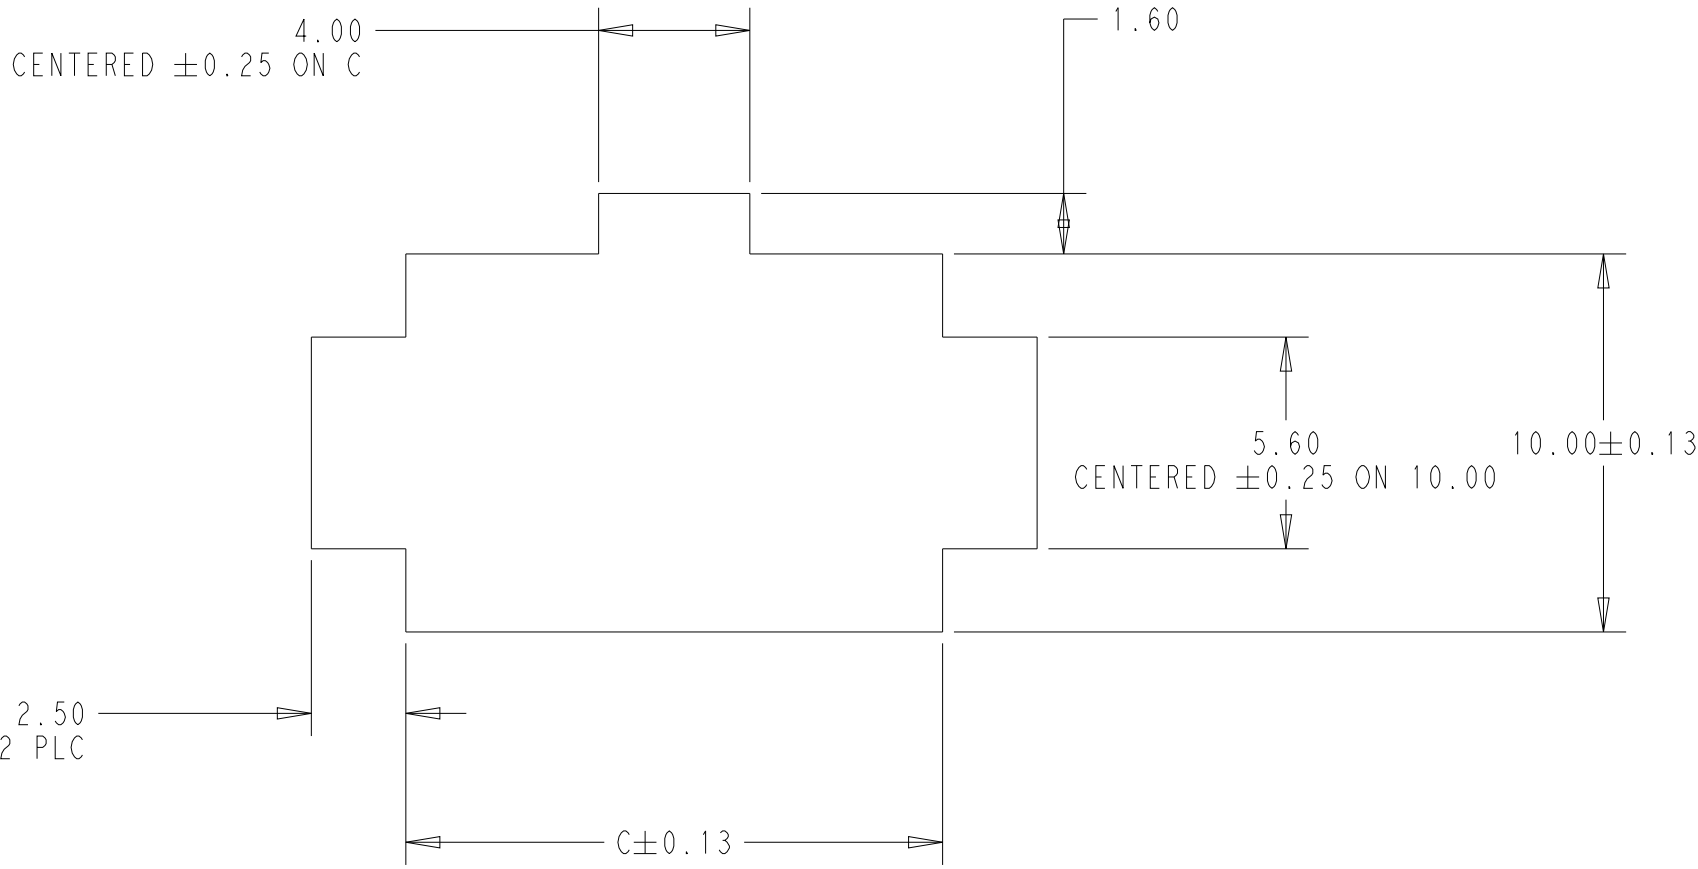
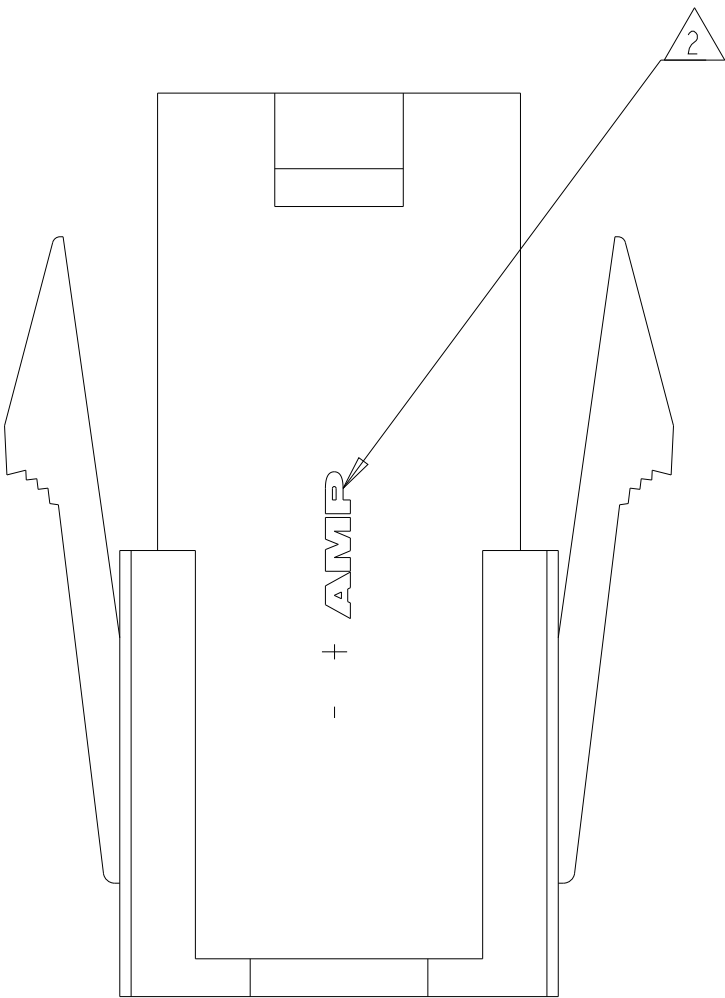
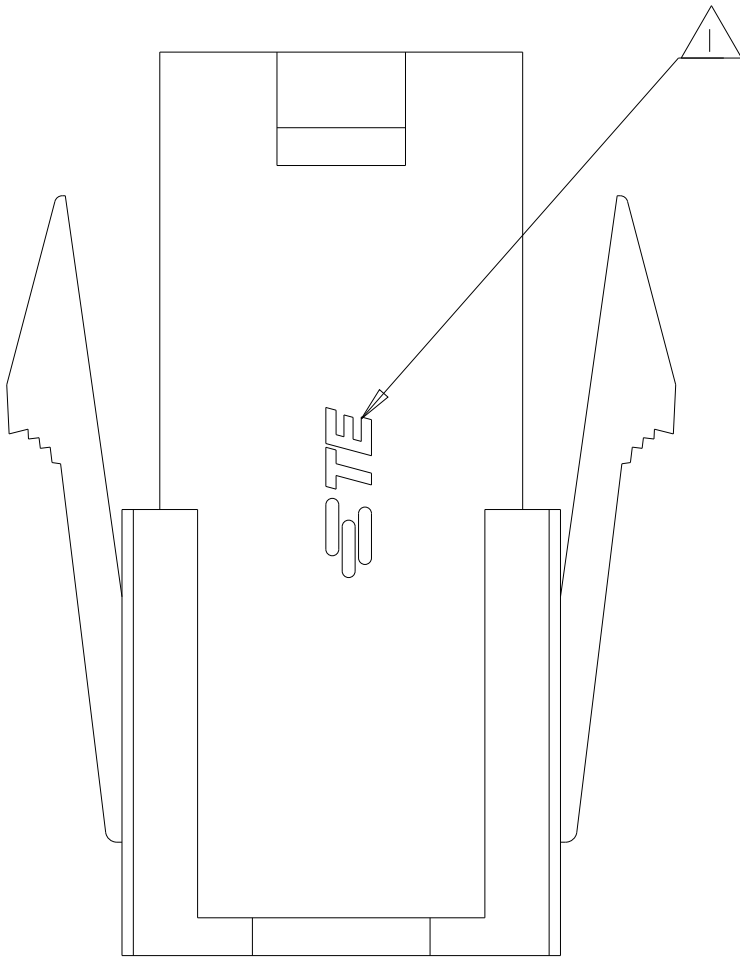
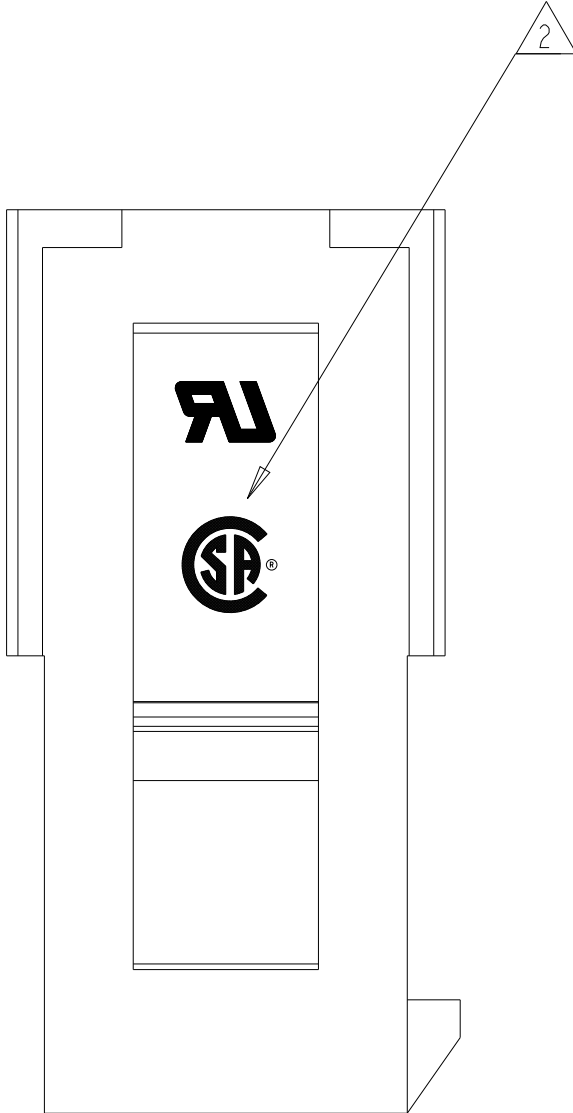
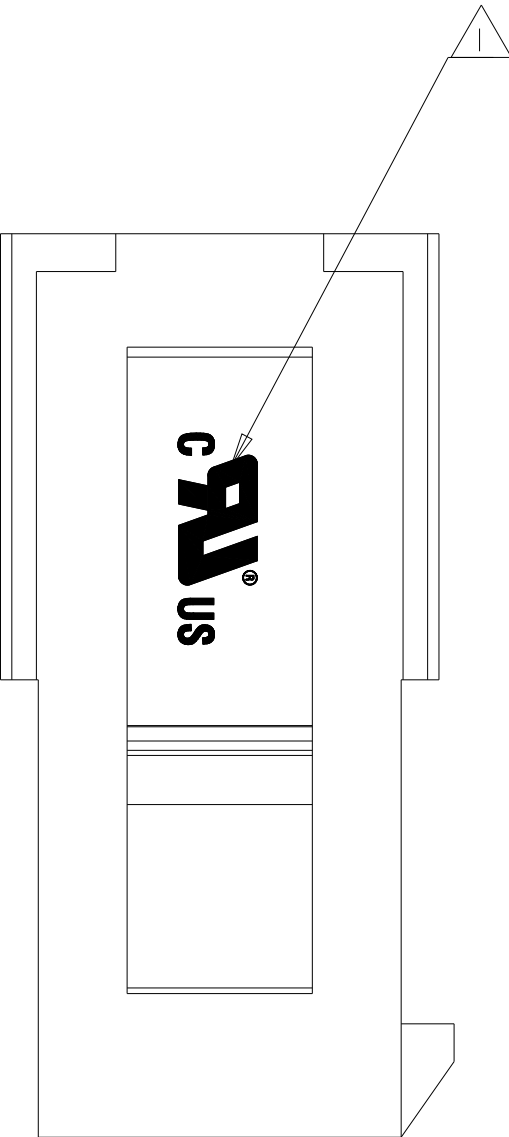
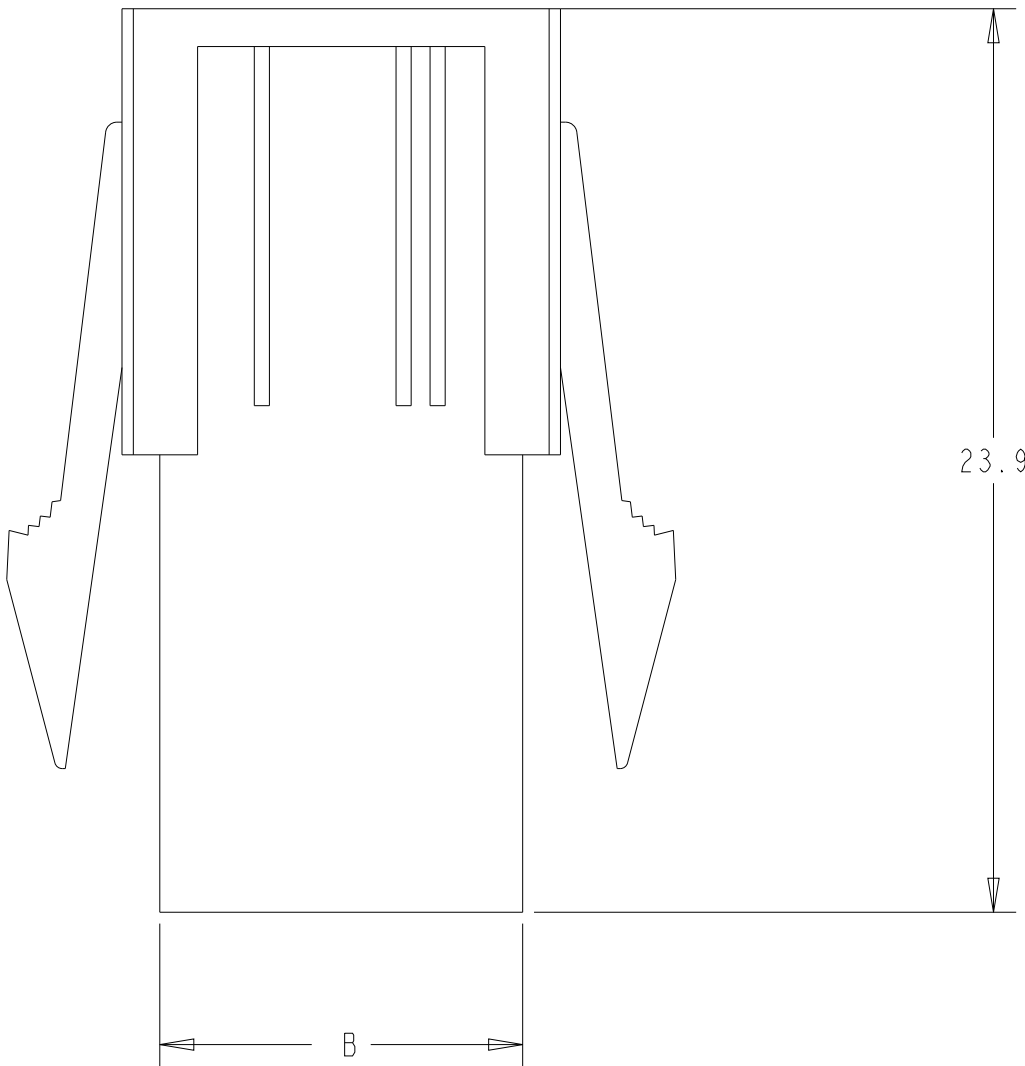


P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	REVISED PER ECR-25-247601	11OCT2025	PC	JH

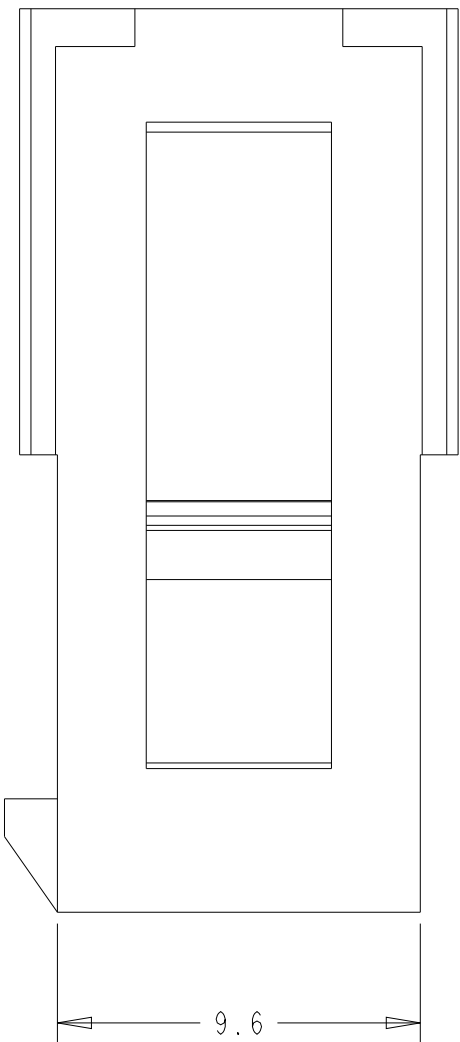

RECOMMENDED CUT OUT FOR 2.00 MAX THICK PANEL

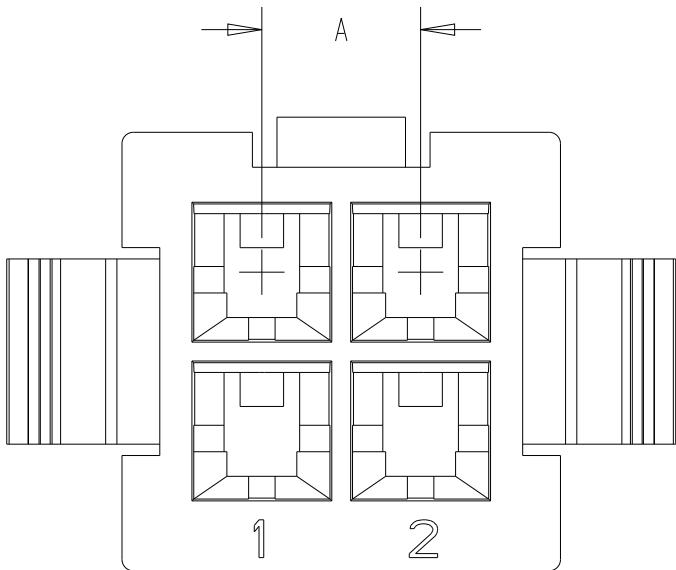

- NOTES:
- 1 TYPE 1
 - 2 TYPE 2
 - 3 MATERIAL: NYLON, UL94V-2 (COLOR-NATURAL, COLOR OF PARTS MAY VARY)
 - 4 PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH

2	52.00	51.60	46.20	24	2-794953-4
2	47.80	47.40	42.00	22	2-794953-2
2	43.60	43.20	37.80	20	2-794953-0
2	39.40	39.00	33.60	18	1-794953-8
2	35.20	34.80	29.40	16	1-794953-6
2	31.00	30.60	25.20	14	1-794953-4
2	26.80	26.40	21.00	12	1-794953-2
2	22.60	22.20	16.80	10	1-794953-0
2	18.40	18.00	12.60	8	794953-8
2	14.20	13.80	8.40	6	794953-6
1	10.00	9.60	4.20	4	794953-4
1	5.80	5.40		2	794953-2
	C	B	A	POS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN P. CHEN CHK J. HUANG APVD J. HUANG	9-6-2025 11-6-2025 11-6-2025	NAME Val-U-Lok V2 Plug Housing	
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC	APPLICATION SPEC	SIZE	RESTRICTED TO
mm	0 PLC ±0.4 1 PLC ±0.4 2 PLC ±0.25 3 PLC ± 4 PLC ± ANGLES ±3°	108-2112	114-13172	00779	-
MATERIAL	FINISH	WEIGHT	CUSTOMER DRAWING	SCALE	REV
3	-	-		5:1	D