


LOC		DIST		REVISIONS			
GP	00	P	LT#	DESCRIPTION	DATE	BY	APPD
		H		REVISED PER ECO-08-007327	17APR08	BM	WW

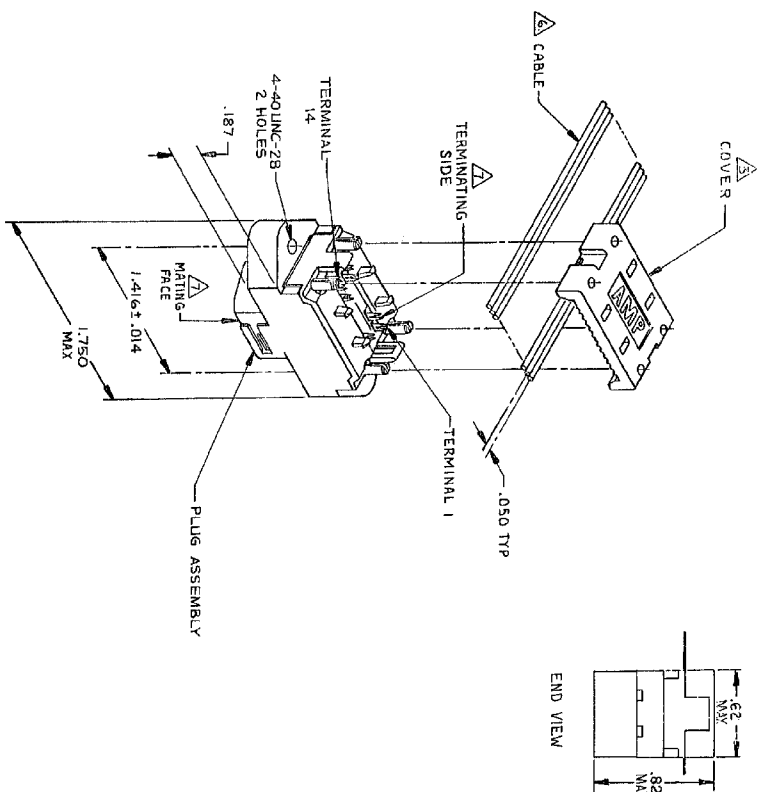

1. THE CONTACT SURFACES OF THE TERMINALS ARE COATED WITH LUBRICANT.
2. MATERIAL:
HOUSING & COVER - THERMOPLASTIC, BLACK
TERMINALS - PHOS. BRONZE PLATED WITH EITHER .000030 MINIMUM GOLD PLATE OR GOLD FLASH
OVER PALLADIUM NICKEL PLATE, .000030 MIN
TOTAL ON MATING SURFACE. GOLD FLASH PLATED ON TERMINATING SIDE, .000050 MINIMUM NICKEL UNDERPLATE OVER ENTIRE TERMINAL.
3. COVER SHOWN LOOSE BUT SHIPPED ASSEMBLED.
4. WIRE RANGE: 26 AWG SOLID THRU 30 AWG SOLID AND 28 AWG STRANDED RIBBON CABLE.
5. ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY UNLESS OTHERWISE SPECIFIED.
6. FLAT CABLE SHALL BE FURNISHED BY CUSTOMER.
7. MATING FACE CONSISTS OF TWO ROWS OF TERMINALS ON .085 CENTERS, TERMINATING SIDE CONSISTS OF TERMINALS ON .100 CENTERS FOR AN EFFECTIVE .050 TERMINATION.
8. FOR MORE INFORMATION REFER TO AMP PRODUCT SPECIFICATION 108-6076 & APPLICATION SPEC 114-6030.

[illegible]