
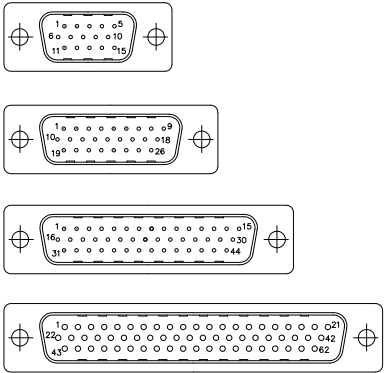




This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

Customer drawing

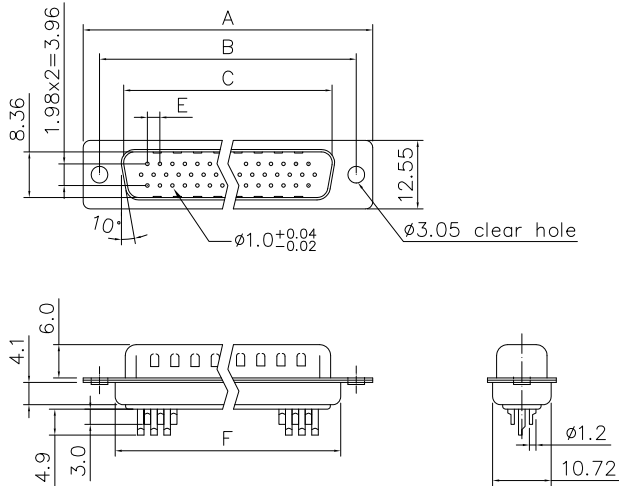

Dimensions

Shell Size	Positions	A	B	C	E	F
E	15	30.81	24.99	16.92	2.29	19.20
A	26	39.20	33.30	25.25	2.29	27.70
B	44	53.04	47.04	38.96	2.29	41.10
C	62	69.40	63.50	55.42	2.41	57.30

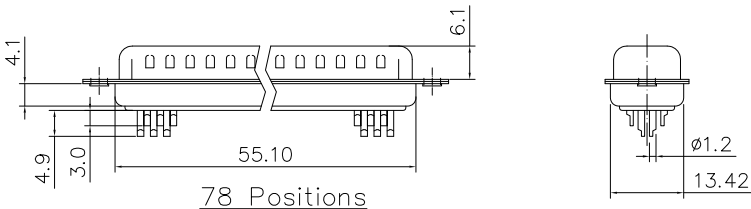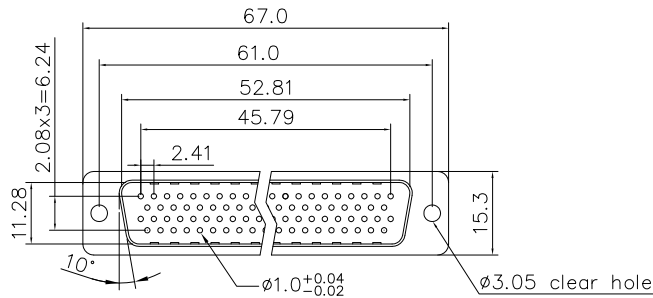


REVISIONS

SYM	ECN	DESCRIPTION	DATE	APPROVED
1	HK--	First Release Drawing	10/18/17	IP
2	HK--	Added pin OD and tolerances	08/11'22	Tony.Tang

D-SUB TECHNICAL DATA

SHELL : Steel, 100u" min Tin over 50u" min nickel over 50u" min Copper
BODY : Glass-Filled Thermoplastic PBT, UL94V-0, color black
CONTACTS : Copper alloy
30u" Gold flash over 50u" min nickel on mating area
100u" min tin over 50u" min nickel on solder area
ELECTRICAL : Voltage rating 250 VAC/RMS
Current Rating :3 AMP
Withstanding Voltage >1000 VAC/RMS
Insulation resistance >1000 M Ohms
Contact resistance 20 mOhms max
MARKING : Amphenol---...(Series No.)
Commercial reference
Manufacturing date

PRODUCT CODE

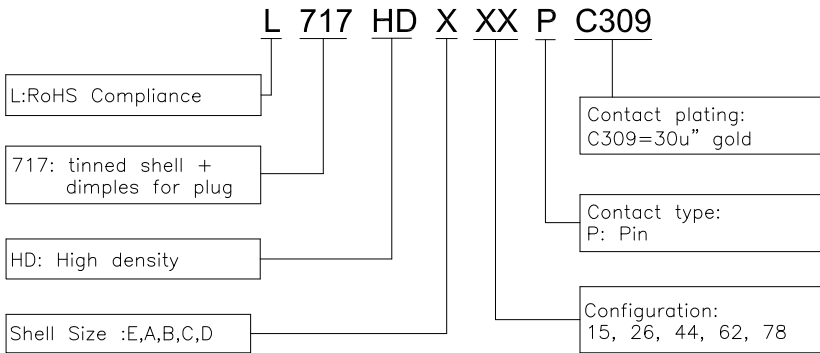

UNLESS OTHERWISE SPECIFIED TOLERANCES	
U.S.	METRIC
.X +/-	0.50
.XX +/-	0.30
.XXX +/-	0.20
FRACTIONS +/-	5°
ANGLES +/-	

FOR MATERIALS AND FINISHES SEE NOTES

REMOVE SHARP EDGES	
DIMENSIONS	
U.S.	INCHES
METRIC	MM

APPROVAL		DATE
DRAWN	Bella.Wu	08/11'22
CHECKED	Tony.Tang	08/11'22
CHECKED		
DRAWING FILE :		
ANGLE OF PROJECTION		

Amphenol		
TITLE Solder type, D-Sub connector		
SIZE	DRAWING NO.	REV.
A4	L717HDXXXPC309	2
SCALE	NONE	SHEET 1 OF 1