
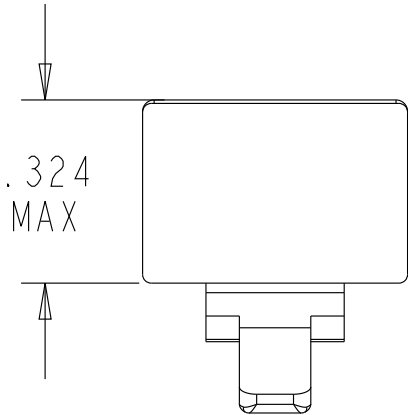
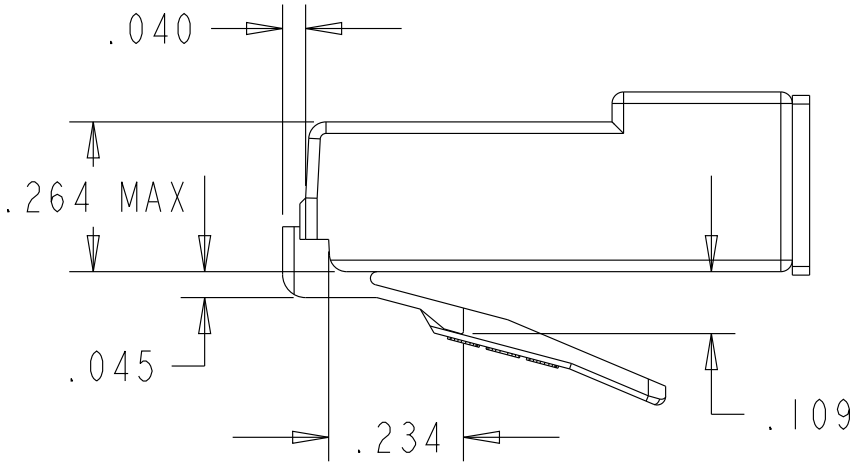
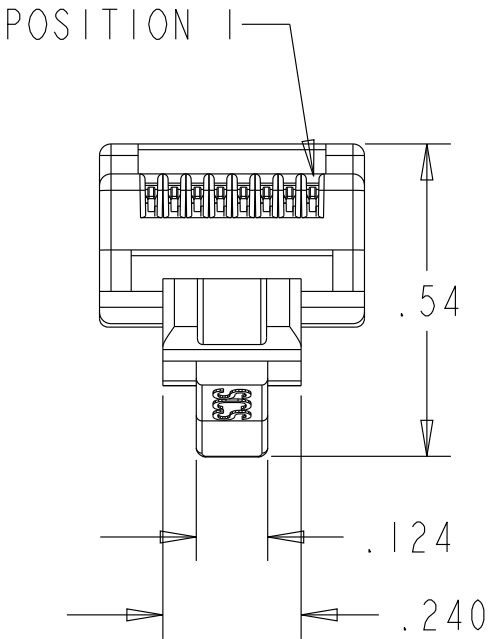
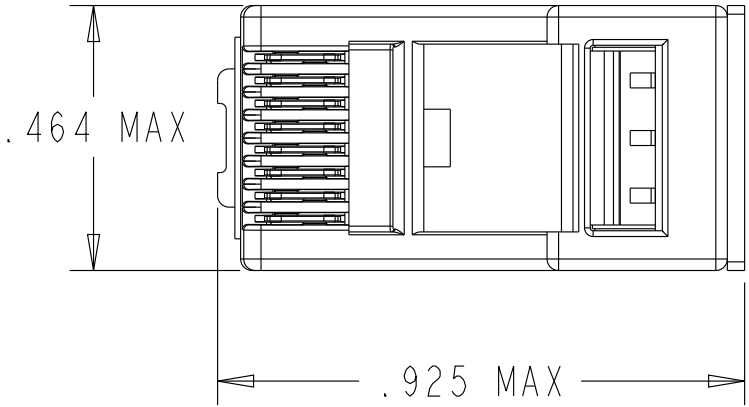


DATE	REV.	ECN	APP'D BY
3-7-22	A0	11941	GL
9/7/23	A1	12253	JE
3-8-24	A2	12336	JE

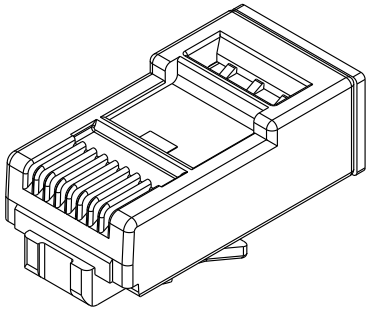

NOTES:
1. MATERIALS:
PLUG BODY: CLEAR POLYCARBONATE, UL 94-V0
CONTACTS: COPPER ALLOY, SELECTIVE GOLD PLATING
RESISTOR: 0.25W, RESISTANCE: SEE TABLE
2. FOR PRODUCT SPECIFICATION SEE PR0026-01

120 OHMS	7/8 50	50 MICRO-INCHES [1.27µm]	ASY39100-006
120 OHMS	1/2-4/5	50 MICRO-INCHES [1.27µm]	ASY39100-005
47K OHMS	6/8	50 MICRO-INCHES [1.27µm]	ASY39100-004
120 OHMS	4/5		
120 OHMS	1/2-3/6	50 MICRO-INCHES [1.27µm]	ASY39100-003
120 OHMS	3/6	50 MICRO-INCHES [1.27µm]	ASY39100-002
120 OHMS	1/2	50 MICRO-INCHES [1.27µm]	ASY39100-001
RESISTANCE	RESISTOR	CONTACT PLATING IN MATING AREA	PART NUMBER

THIRD ANGLE PROJECTION

stewart
CONNECTOR
a bel group

11118 Susquehanna Trail South
Glen Rock, PA 17327-9199
(717) 235-7512
<http://www.stewartconnector.com>

DO NOT SCALE DRAWING
DRAWING IS SUBJECT TO
CHANGE WITHOUT NOTICE

TITLE:
RJ45 TERMINATOR

DIMENSIONS: INCHES [METRIC]

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE ±.005 [0.13]
ANGLES ARE ±1°

SHEET NO.
1 OF 1

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON
ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF
STEWART CONNECTOR AND SHALL NOT BE REPRODUCED,
COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN
CONSENT OF STEWART CONNECTOR. ONE OR MORE U.S. PATENTS
MAY APPLY TO THIS PRODUCT. FOR DETAILS, PLEASE
VISIT: [HTTP://BELFUSE.COM/STEWART/STEWART_PATENTS/](http://BELFUSE.COM/STEWART/STEWART_PATENTS/)

DRN BY:
JE

DATE
11/12/21

APPD BY:
GL

DATE
3/7/22

DWG. NO.
CT390241

REV.
A2

