
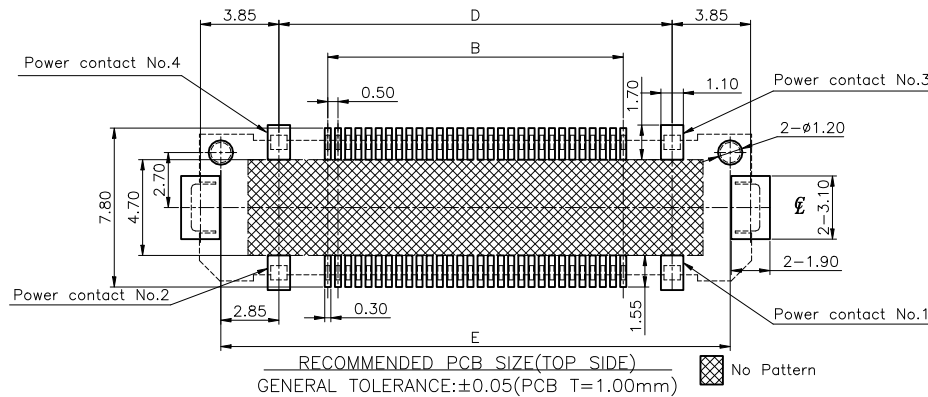
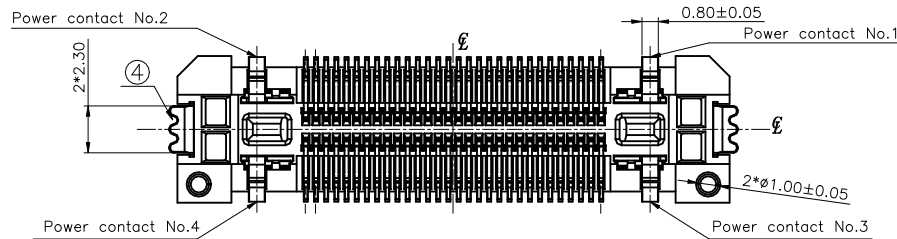
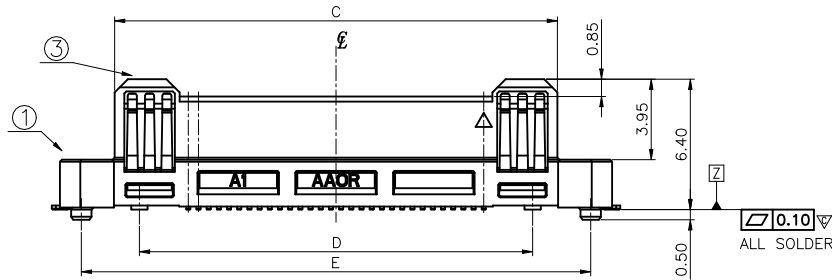


This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of AOR. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of AOR. © 2019 AOR


Amphenol
AORORA

Halogen free

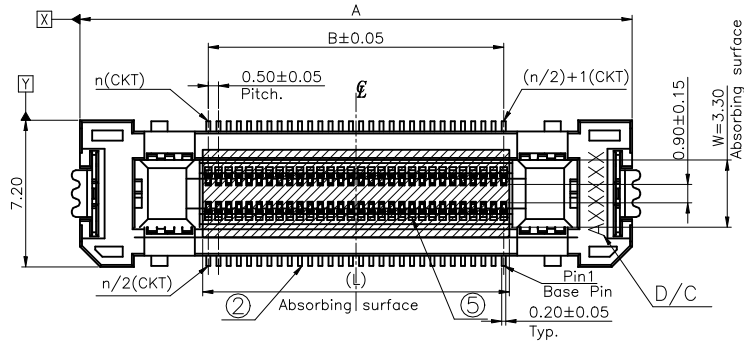

REV.	ECR/ECN No.	DESCRIPTION	DRAWN/DATE	CHECKED/DATE	APPROVED/DATE
A	/	New Release	SH Chen 2022-02-24	May 2022-02-24	Rain 2022-02-24


NO.	COMPONENTS	MATERIALS	SPECIFICATION:FINISH/COLOR	QTY.
1	HOUSING	GLASS FILLED LCP, UL94V-0	BLACK	1
2	SIGNAL CONTACT	COPPER ALLOY T=0.15mm	ALL OVER Ni UNDER PLATING:40u''~120u'' CONTACT AREA: Au 4u'' MIN. SOLDER AREA: Au 2u''Min.	N
3	POWER CONTACT	COPPER ALLOY T=0.20mm	ALL OVER Ni UNDER PLATING:40u''~120u'' CONTACT AREA: Au 4u'' MIN. SOLDER AREA: Au 2u''Min.	4
4	FIXING TAP	COPPER ALLOY T=0.20mm	ALL OVER Ni UNDER PLATING:40u''~120u'' SOLDER AREA: Au 2u''Min.	2
5	MYLAR	THERMOSTABLE T=0.10mm	YELLOW	1

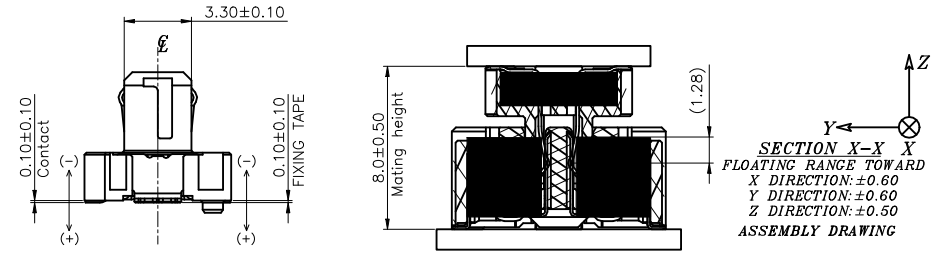


- NOTES:
- BURRS OF CONTACT AREA ARE NOT ALLOWED AND INTERPOSITION AREA SHOULD BE 0.03MM MAX.
 - "▽" MARK IS CRITICAL CHARACTERISTIC DIMENSION.
 - ALL MATERIAL MUST BE COMPLY RoHS.
 - D/C:AXXXX
 - RECE. PART NO.:B329-1B7L1-112**-E100 SERIES
 - PLUG PART NO.: B324-1B7L1-112**-E100
- SHIFT LINE DAY MONTH YEAR Aorora
- PIN No.


DIMENSION LIST:

PIN No.	A	B	C	D	E	L
20	17.10	4.50	11.73	9.30	15.00	5.15
40	22.10	9.50	16.73	14.30	20.00	10.15
60	27.10	14.50	21.73	19.30	25.00	15.15
80	32.10	19.50	26.73	24.30	30.00	20.15
A0(100)	37.10	24.50	31.73	29.30	35.00	25.15
B0(120)	42.10	29.50	36.73	34.30	40.00	30.15
D0(140)	47.10	34.50	41.73	39.30	45.00	35.15




UNLESS OTHERWISE SPECIFIED TOLERANCES				ANGLE OF PROJECTION 		 Amphenol Aorora Technology (Huizhou) Co.,Ltd					
X.	±0.30	X. °	± 5'			TITLE: 0.5mm Pitch Floating BTB Plug connector					
X.X	±0.25	X.X °	± 4'								
X.XX	±0.20	X.XX °	± 3'								
X.XXX	±0.15	X.XXX °	± 2'								
LINEAR DIMS		ANGLES DIMS		DOC TYP Customer Drw		REV. A					
DRAWN		DATE		SH Chen 2022-02-24							
DESIGN		DATE		SH Chen 2022-02-24							
CHECKED		DATE		May 2022-02-24							
APPROVED		DATE		Rai 2022-02-24							
DWG NO.: A-S0739				SIZE		PART NUMBER:					
MATERIAL		SEE NOTES		A4		B324-1B7L1-112**-E100					
FINISHED		SEE NOTES		SCALE		4:1		UNIT : mm		SHEET 1 OF 2	

PULL OUT DIRECTION

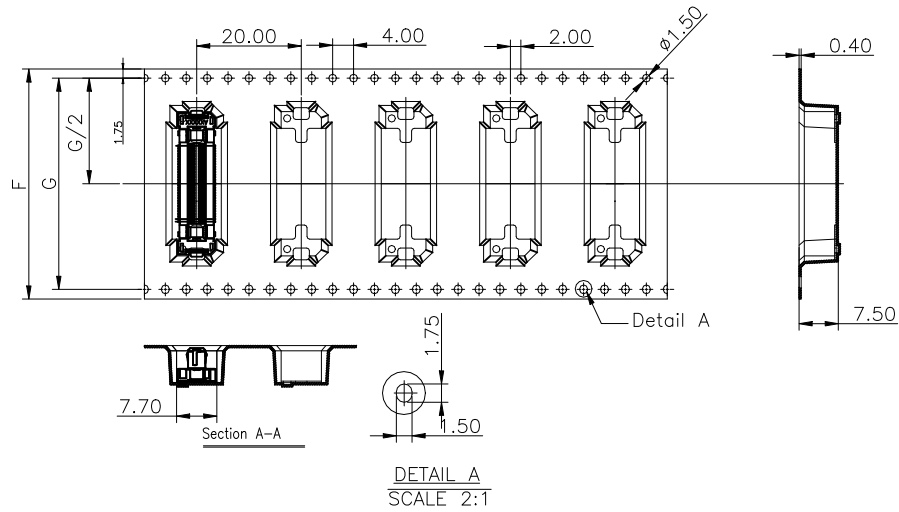


5. QTY LIST:

DIM NO.	20pin	40pin	60pin	80pin	100pin	120pin	140pin
F	44.00	44.00	44.00	52.00	52.00	72.00	72.00
G	40.40	40.40	40.40	50.40	50.40	68.40	68.40
N	6	6	6	5	5	4	4
TOTAL(PCS)	3600	3600	3600	3000	3000	2400	2400

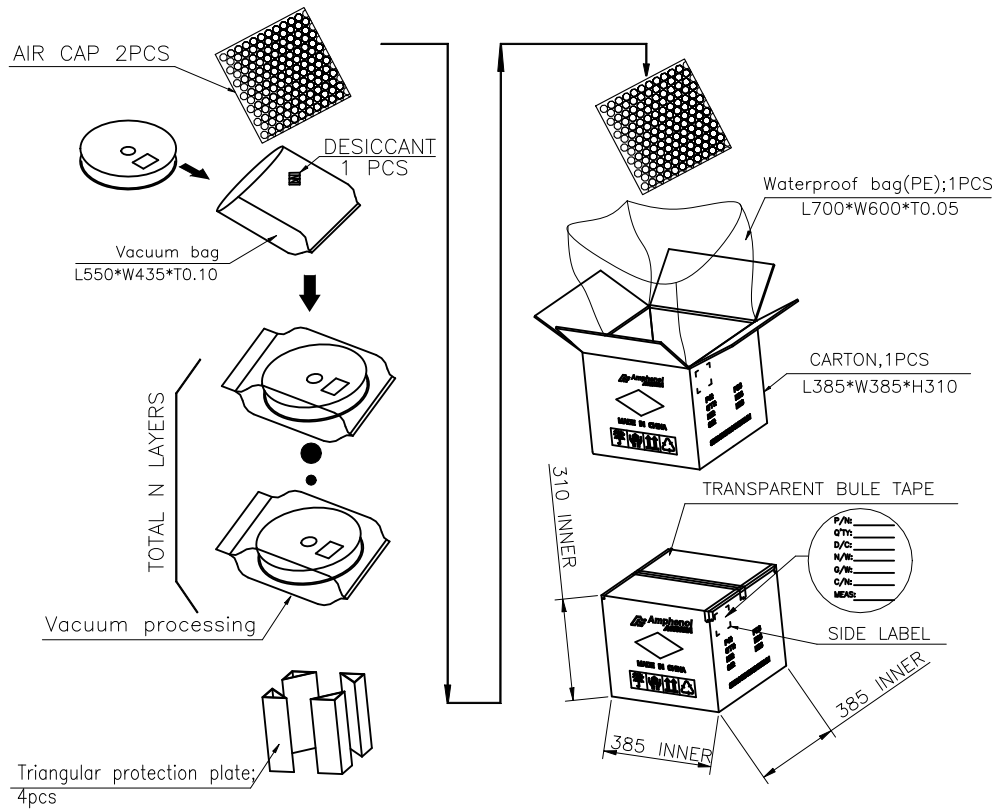

Amphenol AORORA

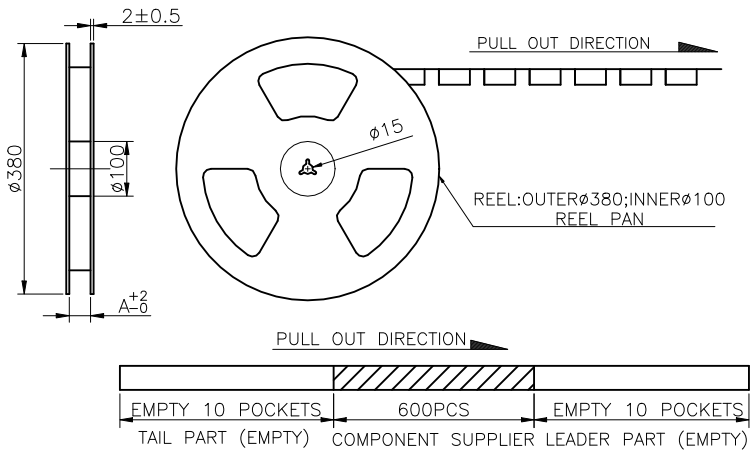

- NOTES:
- MATERIAL:
 - CARRY TAPE:HIPS,T=0.50mm,CLEAR
 - REEL:HIPS,BLUE.
 - SHIM:PE,CLEAR.
 - PRIMARY PACKING:600PCS/REEL.
 - SECONDARY PACKING:"N"REELS/CARTON ("TOTAL"=N*600/CARTON).
 - PEELING RESISTANCE: 0.4N~1.4N(40~140gf);
PEELING ANGLE: 165°~180°;
PEELING SPEED: 300mm/minutes.

UNLESS OTHERWISE SPECIFIED TOLERANCES		ANGLE OF PROJECTION		 Amphenol Aorora Technology (Huizhou) Co.,Ltd	
X.	±0.30	X. *	± 5'		
X.X	±0.25	X.X *	± 4'	Customer Drw	
X.XX	±0.20	X.XX *	± 3'		
X.XXX	±0.15	X.XXX *	± 2'	DRAWN DATE SH Chen 2022-02-24	
LINEAR DIMS		ANGLES DIMS			
DWG NO.: A-S0739		CHECKED DATE May 2022-02-24		TITLE: 0.5mm Pitch Floating BTB Plug connector	
MATERIAL SEE NOTES		APPROVED DATE Rain 2022-02-24		SIZE PART NUMBER: B324-1B7L1-112**-E100	
FINISHED SEE NOTES				REV. A	
				SCALE 1:1 UNIT : mm SHEET 2 OF 2	