


()

()

()

()


D

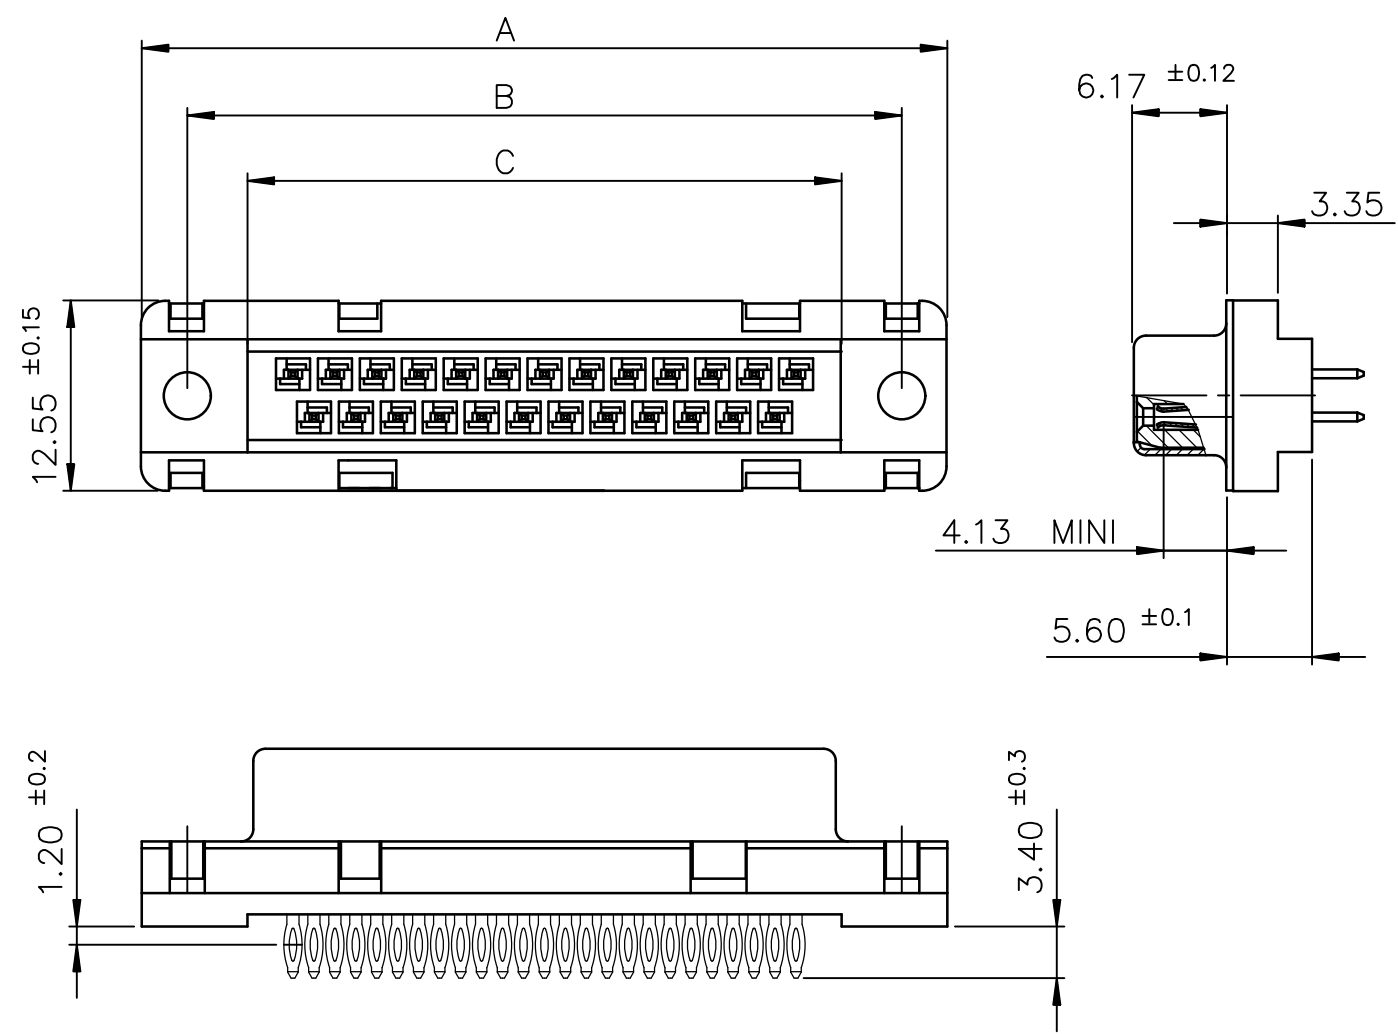

PC board drilling dimensions(after plating)
(thickness ≤ 3.20±0.30mm)

PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER	PART NUMBER
09	30.81	24.99	16.96	16.21	10.96	D09S90C4PA00LF	D09S90C6PA00LF
15	39.14	33.32	25.18	24.54	19.18	D15S90C4PA00LF	D15S90C6PA00LF
25	53.03	47.04	39.12	38.25	33.12	D25S90C4PA00LF	D25S90C6PA00LF
37	69.32	63.50	55.68	54.71	49.68	D37S90C4PA00LF	D37S90C6PA00LF
						200 MATING CYCLES	500 MATING CYCLES

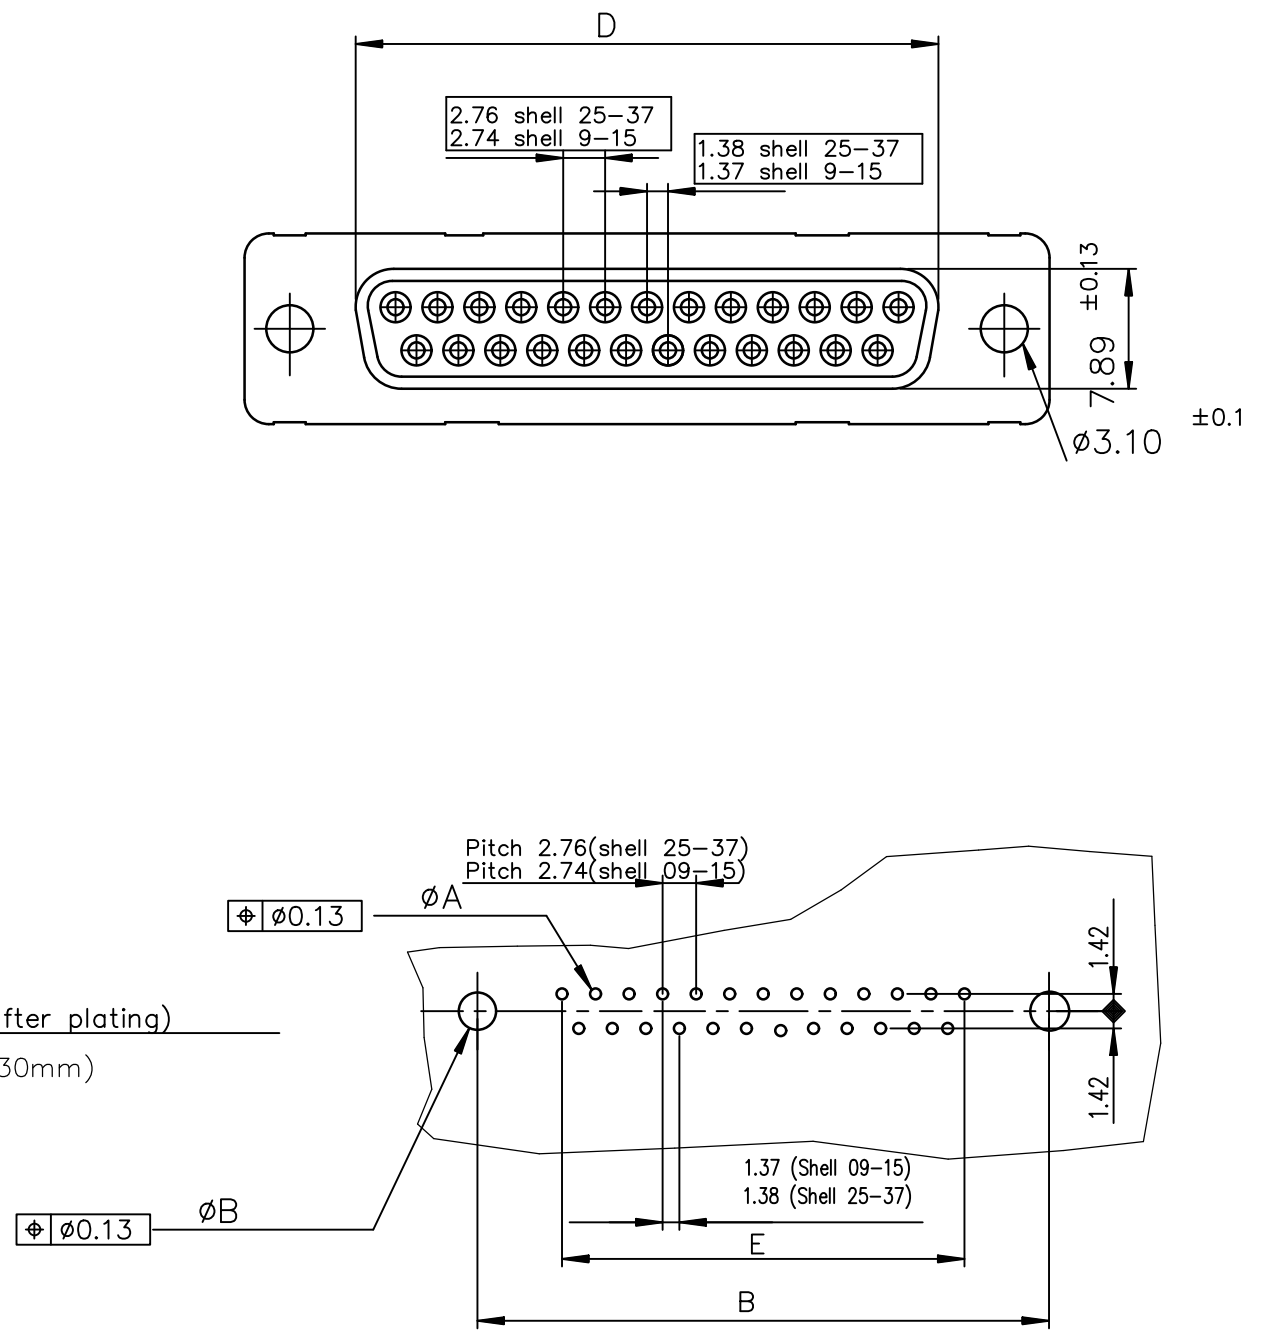

GENERAL CHARACTERISTICS AND ROHS INFORMATION:

SEE DRAWING C01-8646-0001

mat'l. code SEE NOTES				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection mm	product family D-SUB											
ltr	ecn no	dr	date	tolerances unless otherwise specified		mm	title DELTA-D FEMALE CONNECTOR STRIGHT PRESSFIT											
G	ELX-I-57220	GM	2025-09-10	angles	linear													
				0°±2°														
				dr	PESSON	1995-02-09	Amphenol FCi											
				enr	GREGAR M	2025-09-10												
				chr	GREGAR M	2025-09-10												
				appd	ALEX BABU	2025-09-10												
sheet index	revision	G																
	sheet	1																