


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	H4	REVISED PER ECR-25-255998	16SEP2025	SA	DSC

AMP WIRE RANGE	 E13288 Listed	 LR7189 Certified
16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED

- 1 MATERIAL: BODY & SLEEVE - COPPER PER ASTM B152
INSULATION - NYLON PER ASTM D4066
- 2 BODY MATERIAL THK: 0.787±0.051[.031±.002]
- 3 WIRE INSULATION DIAMETER: Ø2.921[Ø.115] TO Ø4.318[Ø.170]

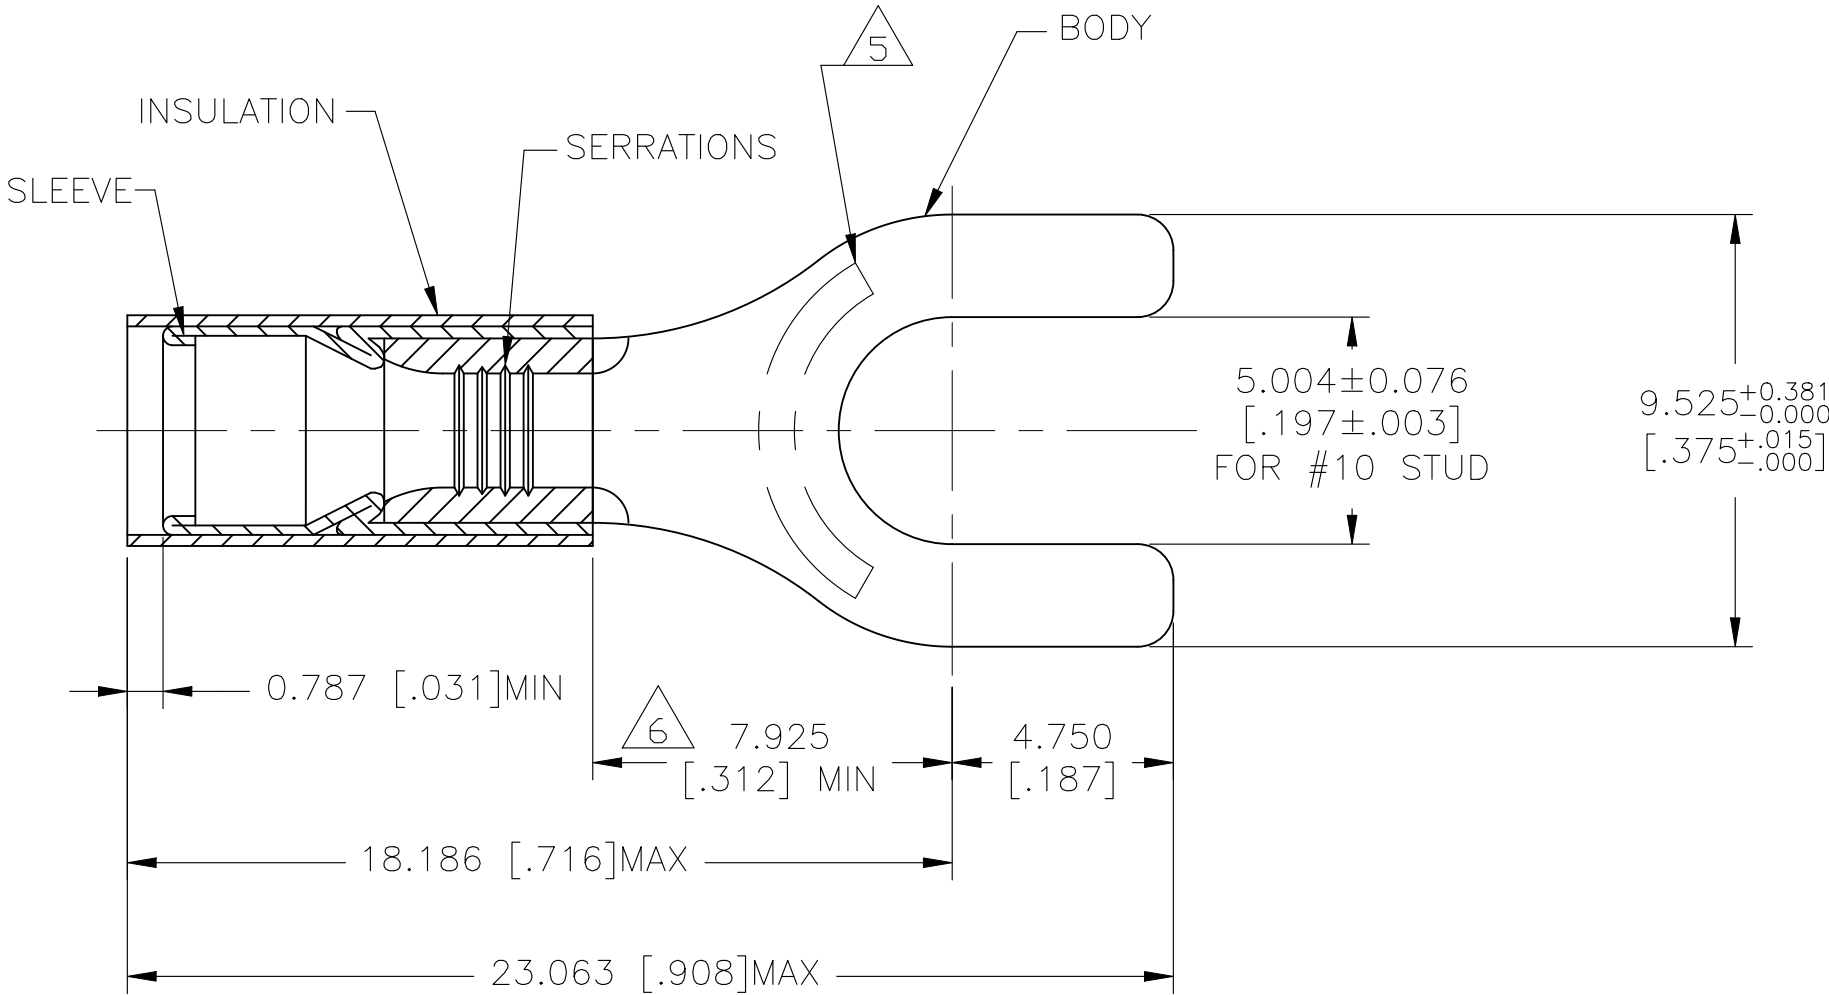

- 4 FINISH:
BODY & SLEEVE - TIN PLATE 0.00254[.000100]
MIN EXT THK PER ASTM B545
INSULATION COLOR - BLUE
- 5 STAMP AMP 16-14* APPROX AS SHOWN
- 6 APPLIES FROM EDGE OF METAL WIRE BARREL
TO CENTER OF STUD HOLE

100	LOOSE PIECE, BOX	8-32060-1
1 KIT = 250 PIECES	LOOSE PIECE	6-32060-0
5000	TAPE & REEL	2-32060-1
1000	LOOSE PIECE	32060
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS			THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN jr ruth 10NOV04 CHK T MICHIELUTTI 10NOV04 APVD T MICHIELUTTI 10NOV04 PRODUCT SPEC UL 486A-B APPLICATION SPEC 114-2157 WEIGHT - CUSTOMER DRAWING		 TE Connectivity NAME TERMINAL, SPADE TONGUE, PIDG, WIRE SIZE: 16-14 AWG SIZE A3 CAGE CODE 00779 DRAWING NO C-32060 SCALE 8:1 SHEET 1 OF 1 REV H4 RESTRICTED TO -			
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F]	DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.127[.005] 4 PLC ± - ANGLES ± -		NAME TERMINAL, SPADE TONGUE, PIDG, WIRE SIZE: 16-14 AWG			
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	VOLTAGE RATING: 300V MAX		FINISH 						
FOR ORDER ENTRY	1-800-526-5142	WIRE CROSS SECTIONAL AREA RANGE, 1.04-2.62mm² [2.050-5.180] CIR MILS SOLID OR STRANDED								