
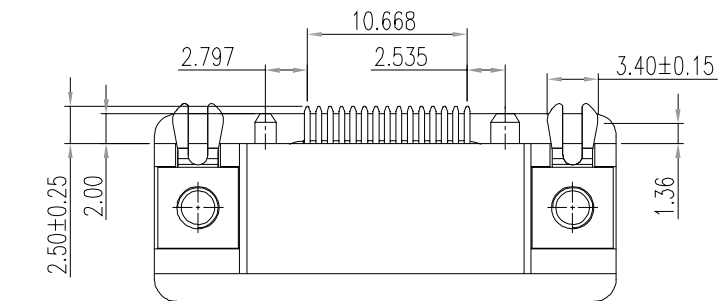
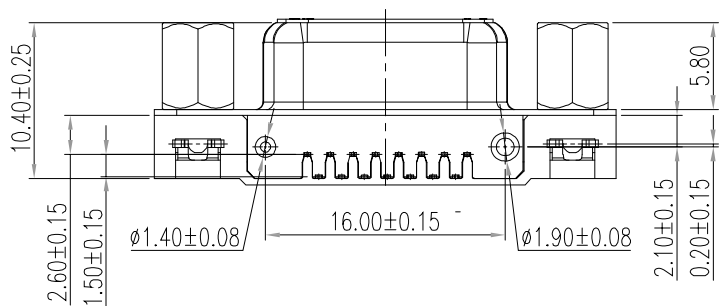


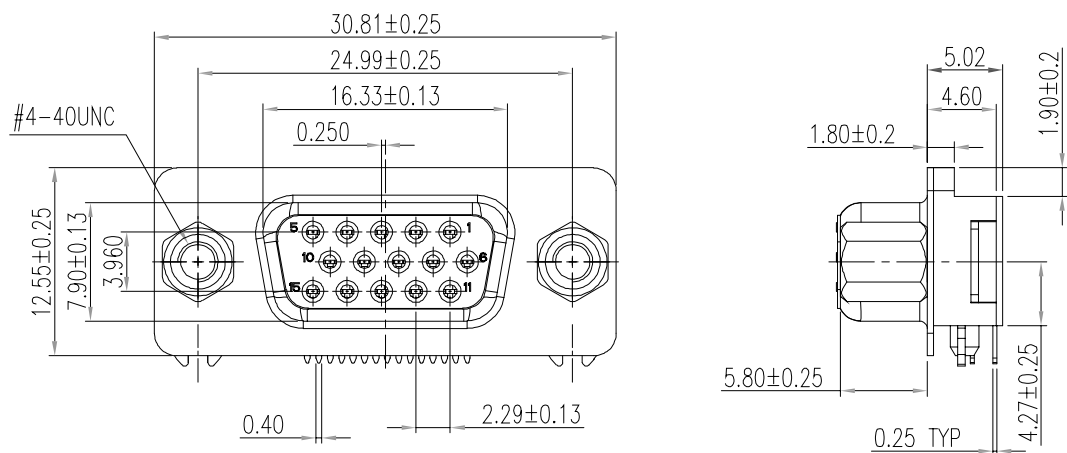

**MATERIAL/FINISH:**

SHELL: SPCC, NICKEL PLATED  
BRACKET: BRASS, NICKEL PLATED  
INSULATOR: PBT OR PA9T, UL 94V-0, BLACK,  
PROCESS TEMP: 230°C for 3 seconds (PBT), 2 CYCLES  
260°C for 5 seconds (PA9T), 2 CYCLES  
CONTACT: BRASS, TIN PLATED  
GOLD PLATED - MATING AREA  
BRIGHT TIN - TERMINATING AREA  
BOARDLOCK: COPPER ALLOY, TIN PLATED  
RIVET: COPPER ALLOY, NICKEL PLATED

**ELECTRICAL:**

RATED CURRENT: 3 AMPS  
RATED VOLTAGE: 250 VAC (rms) MAX.  
WITHSTANDING VOLTAGE: 500 VAC (rms) FOR 1 Min.  
INSULATION RESISTANCE: 1,000 MOhms MIN.  
CONTACT RESISTANCE: 25 mOhms Max.  
OPERATING TEMPERATURE: -55° ~ +85° C

TOTAL MATING FORCE: 6.0 Kgf MAX.  
TOTAL UNMATING FORCE: 1.2 Kgf MIN.

200-015-2 1 3LYY Y

SERIES  
No. of POSITIONS  
GENDER  
2 = FEMALE  
TERMINATION  
1 = PC MOUNT  
SHELL PLATING  
3 = NICKEL  
INSULATOR MATERIAL  
L = PBT  
R = PA9T  
HARDWARE OPTIONS  
SEE PAGE 2  
PLATING OPTIONS  
7 = GOLD FLASH (MATING AREA)  
BRIGHT TIN (SOLDER TAILS)  
9 = 30u" GOLD (MATING AREA)  
BRIGHT TIN (SOLDER TAILS)

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:  
M. SIGMON

DATE:  
10/26/2016

UNITS = mm

DO NOT SCALE FROM DRAWING

NorComp

SCALE:  
NTS

SHEET OF  
1 2

REV  
5


DWG NO.

200-015-213LYYY

HARDWARE OPTIONS


Ø0.120 [Ø3.05]  
HOLE IN FLANGE

00 OPTION





4-40 THREADED HOLE

53 OPTION



4-40 SCREWLOCK  
(0.228 [5.80] x 0.374 [9.50])

56 OPTION

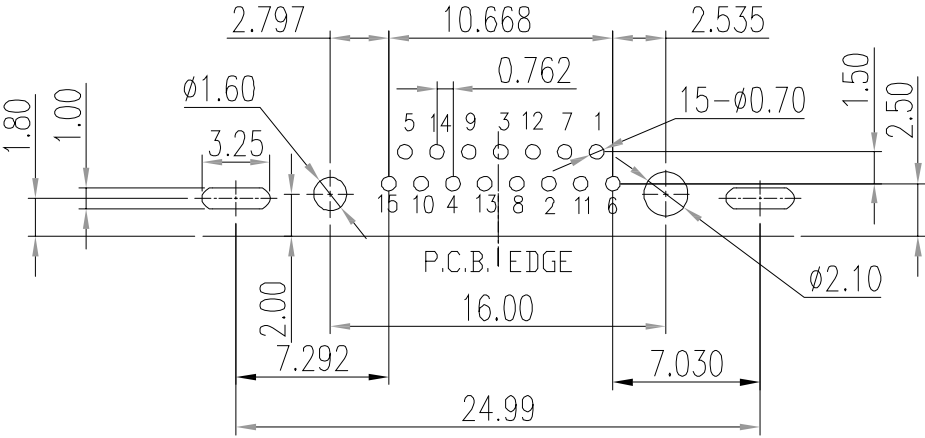

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:  
M. SIGMON

DATE:  
10/26/2016

UNITS = mm

DO NOT SCALE FROM DRAWING

NorComp

SCALE:  
NTS

SHEET OF  
2 2

REV  
5

DWG NO.

200-015-213LYYY