


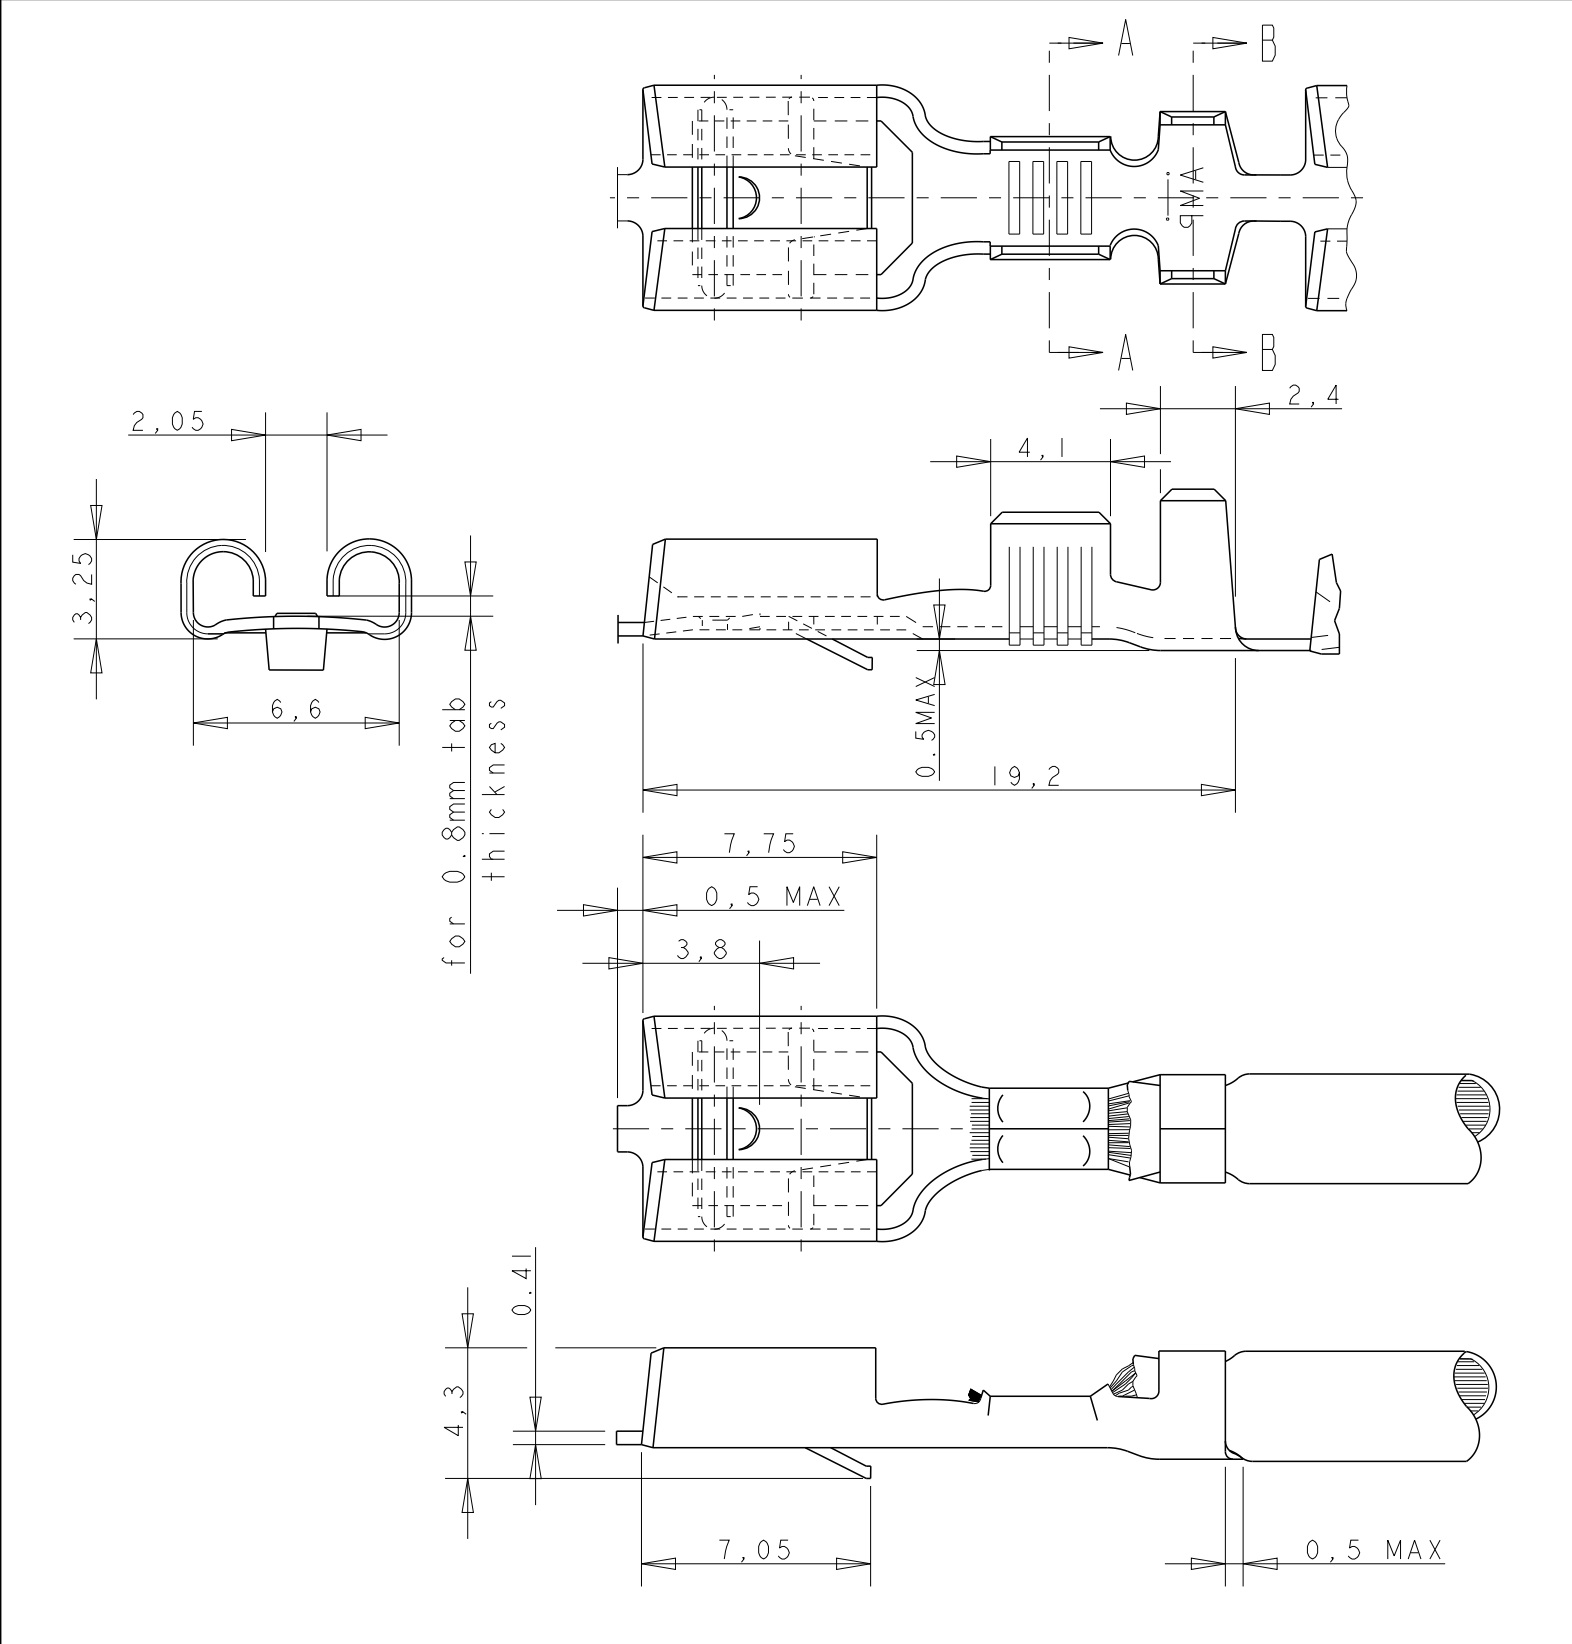

GENERAL TOLERANCES ± 0.3

WIRE RANGE :
1,0-2,5 mm²

INSULATION RANGE :
3,0-4,1mm DIA.

DIRECTION OFF TOP OF REEL

Terminal "U" down.

DIMENSIONS:
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC $\pm$
1 PLC $\pm$
2 PLC $\pm$
3 PLC $\pm$
4 PLC $\pm$
ANGLES $\pm 1^\circ$
FINISH

MATERIAL

SEE TABLE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
J.V.LIEMPT.

CHK
A.BIJNEN.

APVD
L.V.SOEST.

PRODUCT SPEC
-

APPLICATION SPEC
-

WEIGHT
-

CUSTOMER DRAWING

SCALE
1:1



SHEET
1

OF
1

REV
J1

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	APVD
A1	-		H2	REVISED PER ECO-11-005294	21MAR2011	RK
			J	REVISED PER ECR-21-100134	15FEB2021	BDA
			J1	REVISED PER ECR-25-262681	04MAR2026	DB

- NOTES:
- 1 FOR USE ON MINIATURE APPLICATORS (LEFT-RIGHT FEED) AND STANDARD APPLICATORS (RIGHT-LEFT FEED).
 - 2 FOR USE ON MINIATURE APPLICATORS (AMP-O-MATOR APPLICATION). (LEFT-RIGHT FEED).
 - 3 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI



OBSOLETE 3	SECTION A-A		SECTION B-B	
	1	PRE-TINPLATED	PH.BRONZE	6-160446-8
	1	PRE-TINPLATED	BRASS	6-160446-7
	1 2	TINPLATED	PH.BRONZE	6-160446-6
	1 2	SILVER PLATED	PH.BRONZE	5-160446-8
	1 2	SILVER PLATED	BRASS	5-160446-6
	1	TINPLATED	BRASS	5-160446-5
	1	UNPLATED	BRASS	5-160446-4
	1	TINPLATED	PH.BRONZE	5-160446-2
	1	UNPLATED	PH.BRONZE	5-160446-1
NOTES		FINISH	MATERIAL	PART NUMBER