





FRONT VIEW




BOTTOM VIEW

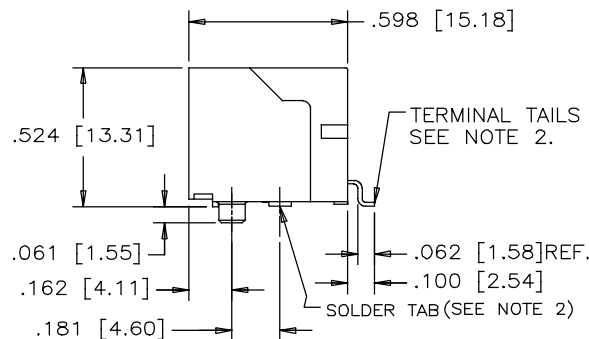

SIDE VIEW

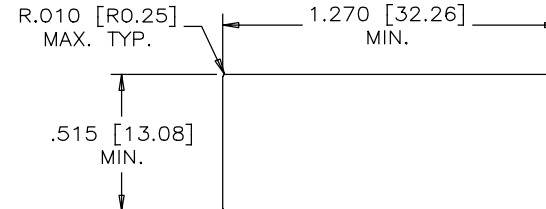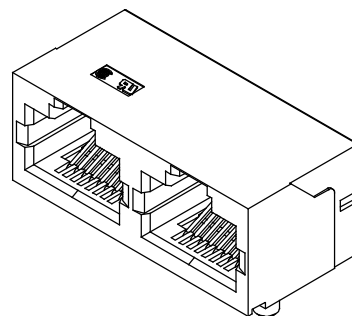

RECOMMENDED PANEL CUTOUT

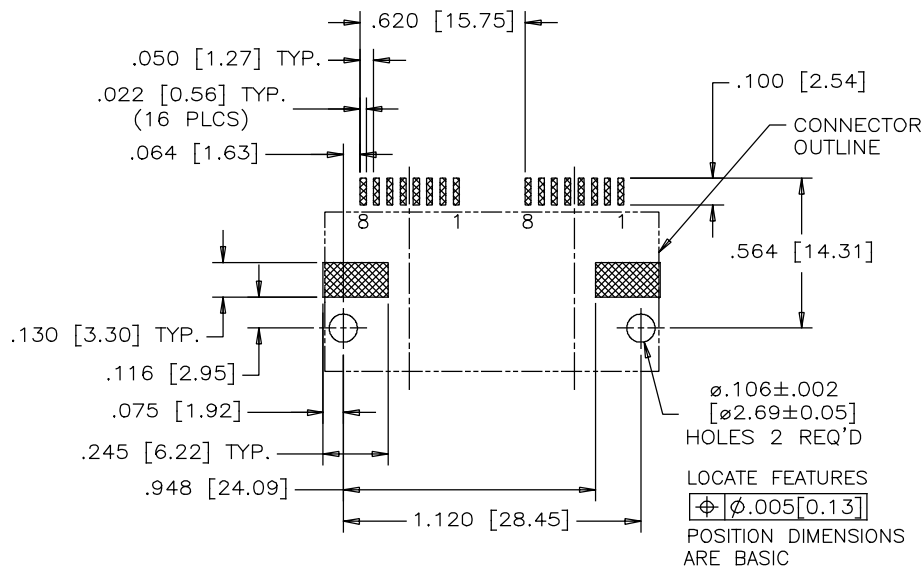

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)



NOTES

1. MATERIAL:

HOUSING: HIGH TEMPERATURE THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0
COLOR: BLACK

CONTACTS: PHOSPHOR BRONZE
PLATING: 20 μ " [0.508 MICRONS]
MIN. GOLD ON MATING SURFACES.
50 μ " [1.27 MICRONS]
MIN. NICKEL UNDERPLATE
100 μ " [2.54 MICRONS]
MIN. MATTE TIN OR GOLD FLASH
ON CONTACT TAILS.

SOLDER TAB: COPPER ALLOY WITH TIN PLATING.

2. COPLANARITY SPECIFICATION:
WITH THE MODULAR JACK SITTING ON A
LEVEL SURFACE, THE MAXIMUM GAP BETWEEN
THE LEVEL SURFACE AND ALL TERMINAL TAILS
AND BOTH FITTING NAILS IS .004 [0.10].

AMPHENOL PART NUMBER: RJSS-5080-02

DRAWN	RONNIE.C	DATE	APR26/18	Amphenol Canada Corp.			
DESIGNED							
CHECKED	AMY.Z	DATE	APR26/18				
I. E. APPRD.							
Q. A. APPRD.							
DWG. APPRD.							
ENG. REL. NO.							
REF.	EAR# RJ18088						
DIMENSIONS ARE IN	INCHES [mm]	CODE ID. NO.	03554	SCALE	WT. -----	SURF. -----	SHEET 1 OF 1
				TITLE			
				2 PORTS SURFACE MOUNT JACK, UNSHIELDED, WITH HOLD DOWN BRACKET, 8 POSITION & 8 CONTACTS (TRAY PACKAGE)-RoHS COMPLIANT			
				DWG	DRAWING NO.	REV.	
					P-RJSSE-5080-02	A	

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION
MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING
PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.