

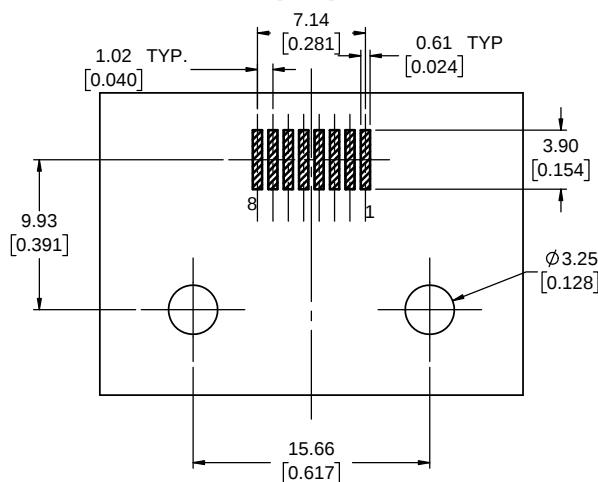
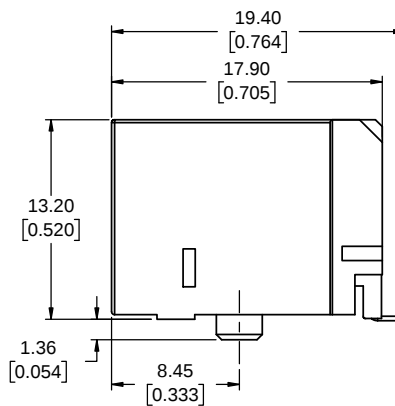
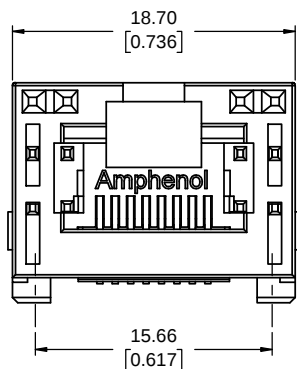



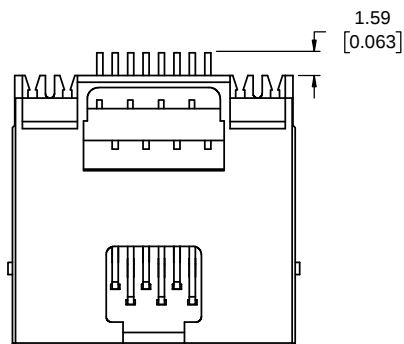

RECOMMENDED PCB LAYOUT
VIEW FROM COMPONENT SIDE
TOLERANCE: +/-0.05[0.002]

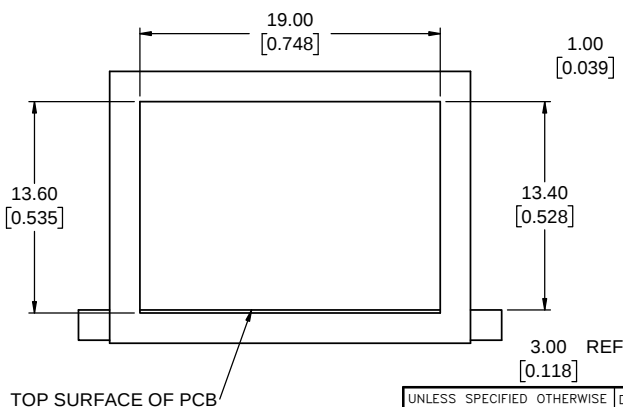

TOP SURFACE OF PCB

RJ CONNECTOR CONFORMS TIA 1096

AMPHENOL PART NUMBER DESCRIPTION: RJE3A-188-0X02

GOLD PLATING OPTION
1=6u" GOLD PLATING
2=15u" MIN GOLD PLATING
3=30u" MIN GOLD PLATING
4=50u" MIN GOLD PLATING

NOTES:

ELECTRICAL:

1. 60 VDC WITH MAXIMUM POWER 100 W
2. INSULATING RESISTANCE : 500 MEGAOHMS MINIMUM.
3. DIELECTRIC STRENGTH : 1000 VAC 60Hz, 1MIN.
4. CATEGORY 5e CHARACTERISTIC

FREQUENCY MHZ	NEAR-END CROSSTALK dB, MIN.	RETURN LOSS dB , MIN.	INSERTION LOSS dB, MAX.
1.0	65.0	30.0	0.1
4.0	65.0	30.0	0.1
8.0	64.9	30.0	0.1
10.0	63.0	30.0	0.1
16.0	58.9	30.0	0.2
20.0	57.0	30.0	0.2
25.0	55.0	30.0	0.2
31.25	53.1	30.0	0.2
62.5	47.1	24.1	0.3
100.0	43.0	20.0	0.4

MECHANICAL:

1. SHIELD: STAINLESS STEEL WITH 100u" MATTE TIN OVER 20u" MIN. NICKEL UNDERPLATE
2. HOUSING: HIGH TEMP THERMOPLASTIC. UL 94V-0.
3. CONTACT: PHOSPHOR BRONZE.
SELECTIVE GOLD PLATING FOR MATING SURFACE,
50u" MIN. NICKEL UNDERPLATE
100u" MATTE TIN PLATING ON CONTACT SOLDER TAIL.
4. COPLANARITY:
THE MAXIMUM GAP BETWEEN ALL TERMINAL TAILS IS 0.10 [0.004]





ENVIRONMENTAL:

1. STORAGE : -40 °C TO +85°C
2. OPERATION: -55 °C TO +85°C
3. MATES WITH MODULAR PLUG CONFORMING TO TIA 1096 STANDARD.
4. RECOMMENDED SOLDER PROCESS:
REFLOW SOLDER, PEAK TEMPERATURE 260°C FOR 10 SECONDS MAX.

UNLESS SPECIFIED OTHERWISE	DRAWN	JAMISON.C	APR13/21
PRIMARY UNITS MILLIMETERS	CHECKED	L.CHAN	APR13/21
SECONDARY INCHES	M.E. APP'D		
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APPR.	A.GREEN	APR13/21
1 DECIMAL PLACE	ENG. REL. NO.		
2 DECIMAL PLACES ±0.25	REF.		
3 DECIMAL PLACES ±0.13	THIRD ANGLE PROJECTION		
ANGULAR DEGREES ±1°	DO NOT SCALE DRAWING		

Amphenol Canada Corp. Commercial Products			
MODULAR JACK, SINGLE PORT, 8P8C, UNSHIELDED, TAB UP, W/O LED, WITH POSITION PEG, CAT 5e ---RoHS COMPLIANT			
P-RJE3A-188-0X02			REV B
CODE ID NO. 03554	DWG SIZE: N/A	SCALE: FIT	SHEET 1 OF 2

REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	INITIAL RELEASE	APR13/21	K.T
B	UPDATE VOLTAGE	JUN15/21	K.T

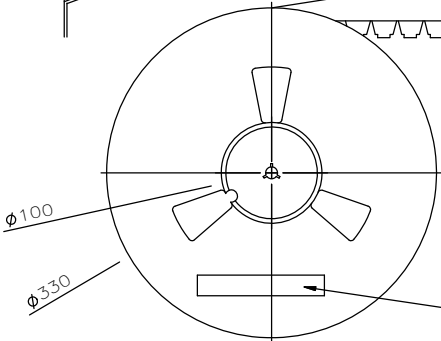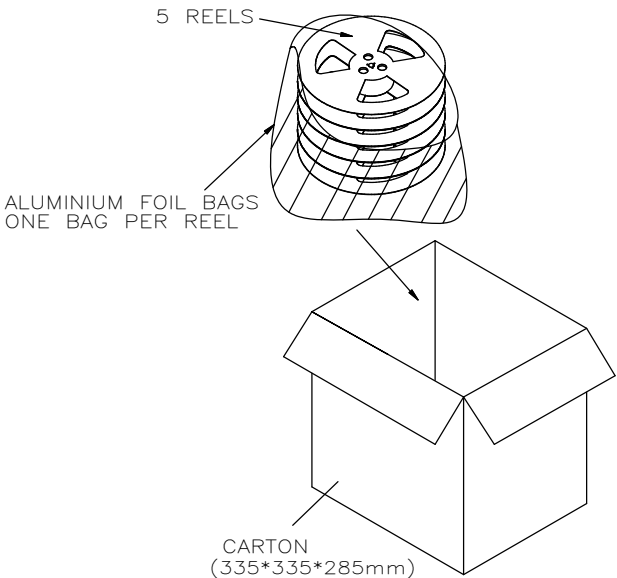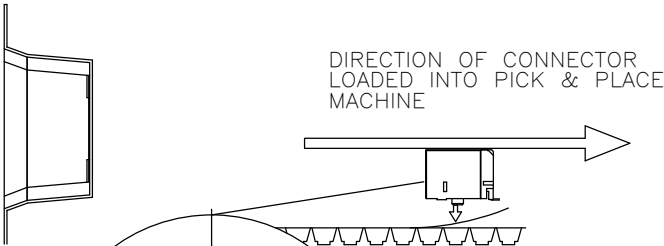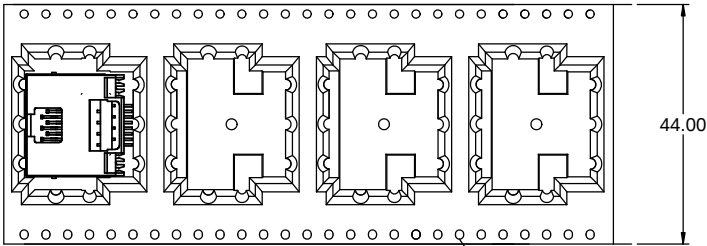

AMPHENOL P/N: RJE3A1880X02		
XXXXXXXXXXXXXXXXXXXXXXXXXXXX		
LOT#	DATE CODE	CTY OF ORIGIN: CN

SEAL CARTON



NOTES:

1. FINISHED CONNECTORS (AFTER FINAL INSPECTION) TO BE PACKED INTO CONDUCTIVE HIPS TAPE AND REEL. ONE REEL SHOULD HOLD 125 PCS CONNECTORS.
2. 13 EMPTY POCKETS SEALED OF TAPE LEADER AND 6 EMPTY POCKETS SEALED OF TAPE TRAILER.
3. A FULLY LOADED CARTON SHOULD CONTAIN 5 REELS (625 PCS) OF CONNECTORS.

UNLESS SPECIFIED OTHERWISE	DRAWN	JAMISON.C	APR13/21
PRIMARY UNITS MILLIMETERS	CHECKED	L.CHAN	APR13/21
SECONDARY INCHES	M.E. APP'D		
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APPR.	A.GREEN	APR13/21
1 DECIMAL PLACE	ENG. REL. NO.		
2 DECIMAL PLACES ±0.25	REF.		
3 DECIMAL PLACES ±0.13	THIRD ANGLE PROJECTION		
ANGULAR DEGREES ±1°	DO NOT SCALE DRAWING		

Amphenol Canada Corp.
Commercial Products
MODULAR JACK, SINGLE PORT, 8P8C,
UNSHIELDED, TAB UP, W/O LED,
WITH POSITION PEG, CAT 5e
---RoHS COMPLIANT

DWG. NO.	P-RJE3A-188-0X02	REV	B
CODE ID NO. 03554	DWG SIZE: N/A	SCALE: FIT	SHEET 2 OF 2