
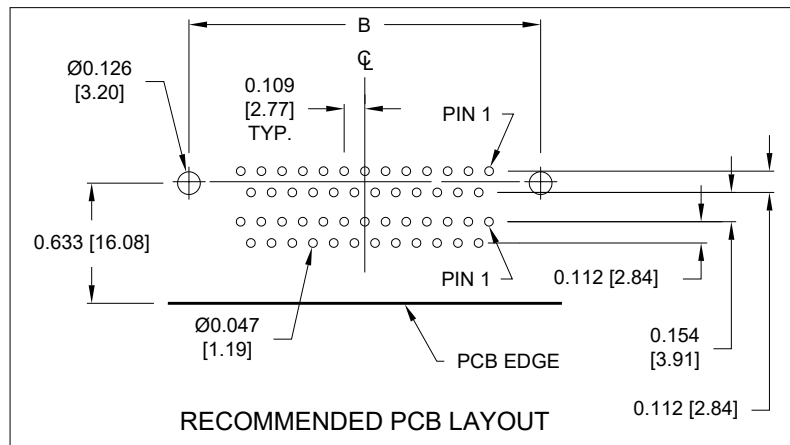


DESCRIPTION: 0.750 CENTER DUAL PORT D-SUB - FEMALE OVER FEMALE

25 PIN
SHOWN

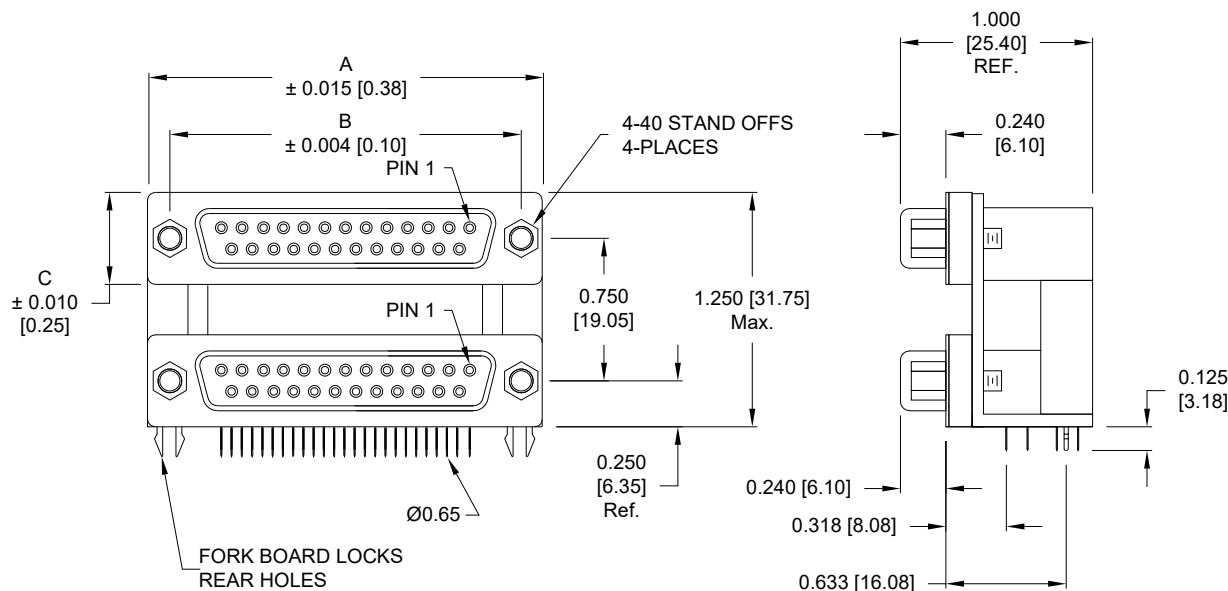

SPECIFICATIONS:

MATERIALS:

HOUSING:	UL94 V-0 RATED, BLACK PA9T, 260° PROCESS TEMP.
CONTACTS:	GOLD PLATED BRASS (SEE P/N KEY BELOW)
SHELL:	NICKEL PLATED STEEL

ELECTRICAL:

RATED CURRENT:	5A
INSULATOR RESISTANCE:	1,000 Ohms MIN.
DIELECTRIC STRENGTH:	1,000 VAC RMS
WORKING VOLTAGE:	250V
OPERATING TEMPERATURE:	-55°C TO +105°C

DIMENSIONS:

	9	15	25	37
A	1.204 [30.58]	1.535 [38.99]	2.078 [52.78]	2.724 [69.19]
B	0.984 [24.99]	1.312 [33.32]	1.850 [46.99]	2.500 [63.50]
C	0.494 [12.55]	0.494 [12.55]	0.494 [12.55]	0.494 [12.55]

178-YYY-513R671

SERIES	_____
POSITIONS	_____
009	_____
015	_____
025	_____
037	_____
GENDER	_____
31 = FEMALE OVER MALE	
41 = MALE OVER FEMALE	
51 = FEMALE OVER FEMALE	
61 = MALE OVER MALE	
SHELL PLATING	_____
3 = NICKEL	
HARDWARE OPTIONS	_____
67 = 4-40 STAND OFFS/BOARD LOCKS (REAR)	
PLATING OPTIONS	_____
1 = SELECTIVE (GF MATING AREA / TIN PLATED TAILS)	
A = 30u" GOLD MATING AREA/GOLD FLASH TAILS	
9 = 30u" GOLD MATING AREA/TIN TAILS	

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

C. SMITH

DATE:

03/30/07

UNITS = inch [mm]

DO NOT SCALE FROM DRAWING

NorComp

SCALE:

NTS

SHEET

OF

1

1

REV

9

DWG NO.

178-YYY-513R671