

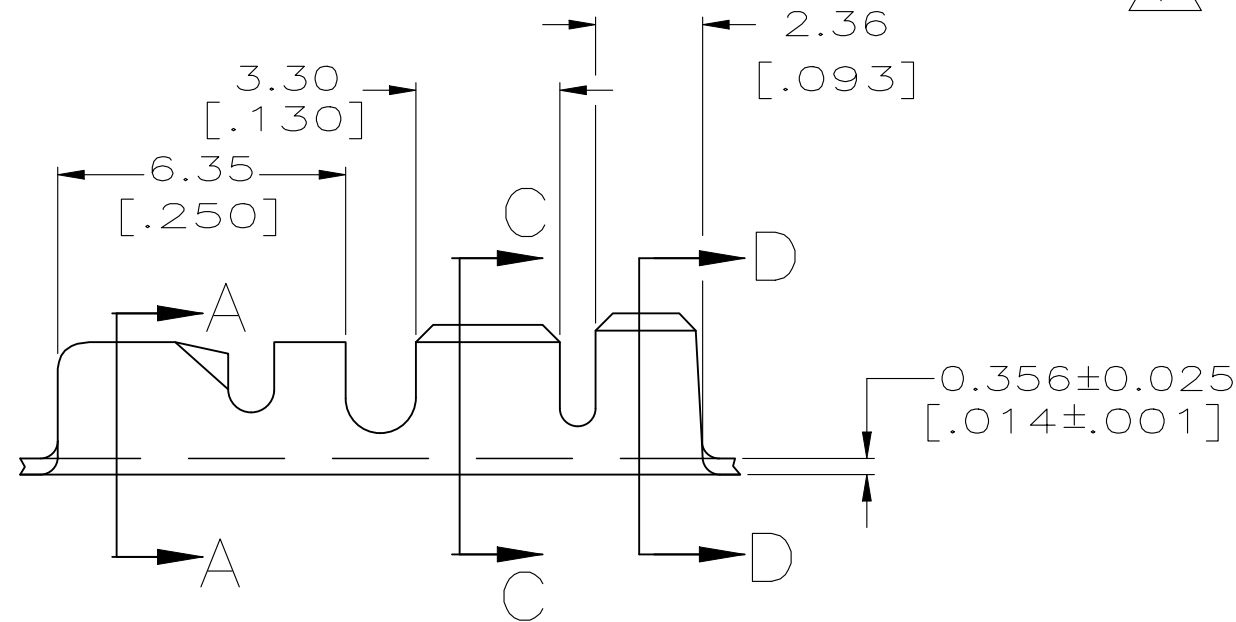


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50		J2	REVISED PER ECR-25-231902	21 JAN 25	AC	EMS


- 1 CONTINUOUS STRIP ON REELS.
- 2 INDENT IS OPTIONAL ON PIN.
- 3 MATING PIN IS TIN PLATED.
- 4 METHOD OF FASTENING PIN TO BE DETERMINED BY CUSTOMER.
- 5 WIRE RANGE: 0.8–1.3mm² [#18–#16] AWG.
- 6 INSULATION RANGE: 2.29–3.05mm [.090–.120] DIA.
- 7 PRELIMINARY – NOT FOR PRODUCTION.

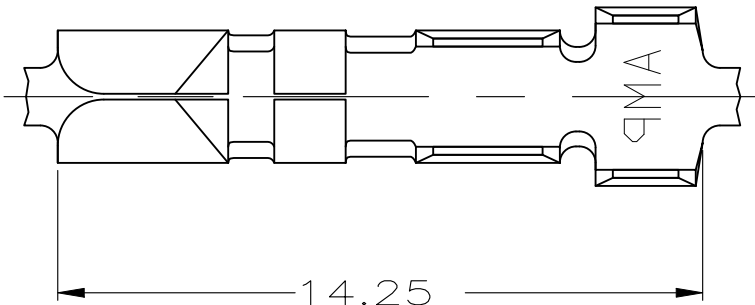


FITS 2.36 [.093] DIA
PIN




SECTION A—A
SCALE 10:1

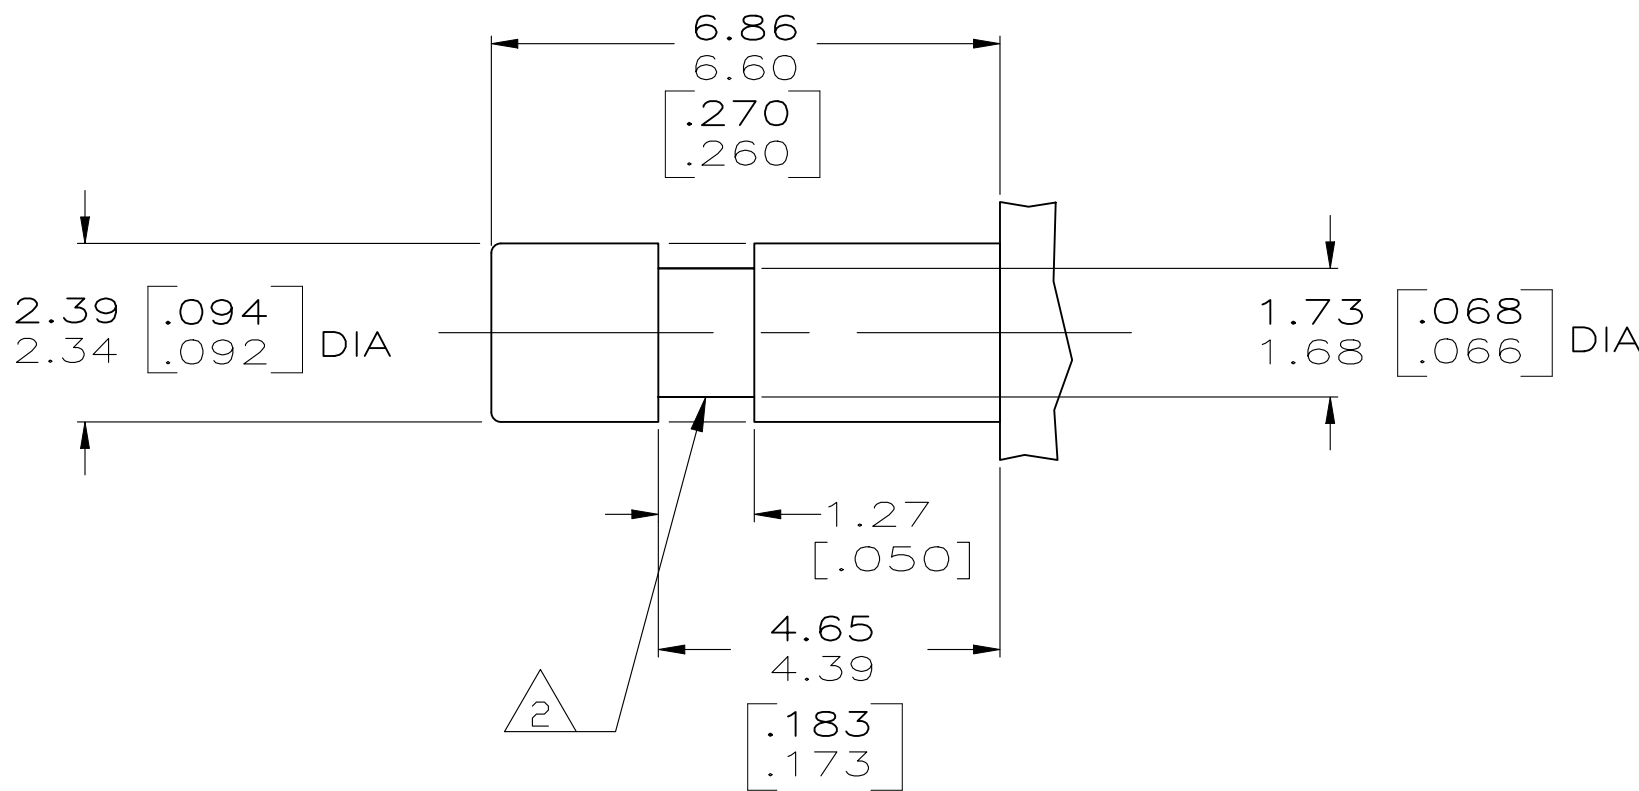

MATING PIN 2

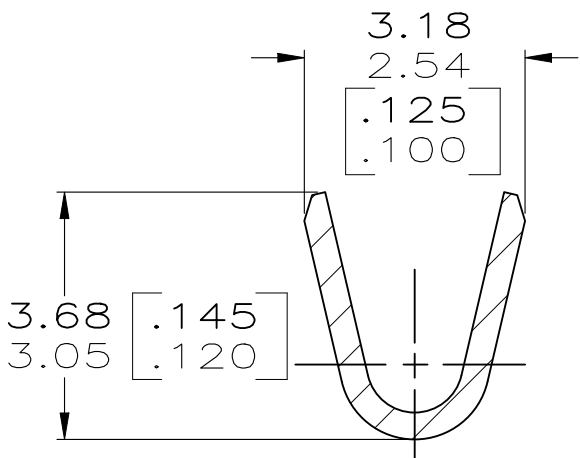

SECTION C—C
SCALE 10:1

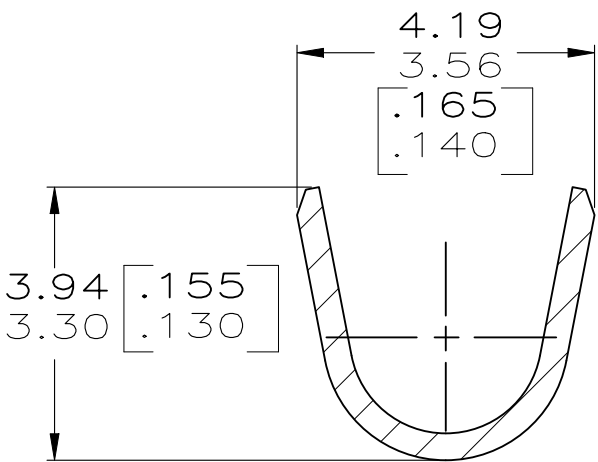

SECTION D—D
SCALE 10:1

OBSOLETE	0.00381 [.000150] MIN NICKEL PLATE	H04 BRASS	7	42101-4
	0.002032 [.000080] MIN TIN PLATE	H04 PHOSPHOR BRONZE		42101-3
	0.002032 [.000080] MIN TIN PLATE	H04/4M BRASS		42101-2
OBSOLETE		H04 BRASS		42101-1
FINISH		MATERIAL		PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.		Tyco Electronics Corporation Harrisburg, PA 17105-3608		
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME		
		PIN RECEPTACLE, 2.36 [.093] DIA		
MATERIAL	FINISH	SIZE	CAGE CODE	DRAWING NO
		WEIGHT	RESTRICTED TO	
SEE TABLE	SEE TABLE	A2	00779	C-42101
CUSTOMER DRAWING		SCALE	SHEET	REV
		5:1	1 OF 1	J2