


NOTES:

MATERIAL: PHOSPHOR BRONZE
PLATING: SEE P/N KEY
WIRE SIZE: 24-26 AWG
CONTACT RESISTANCE: 20 mOHMS MAX.
CONTACT AMPERAGE RATING: 3 AMPS

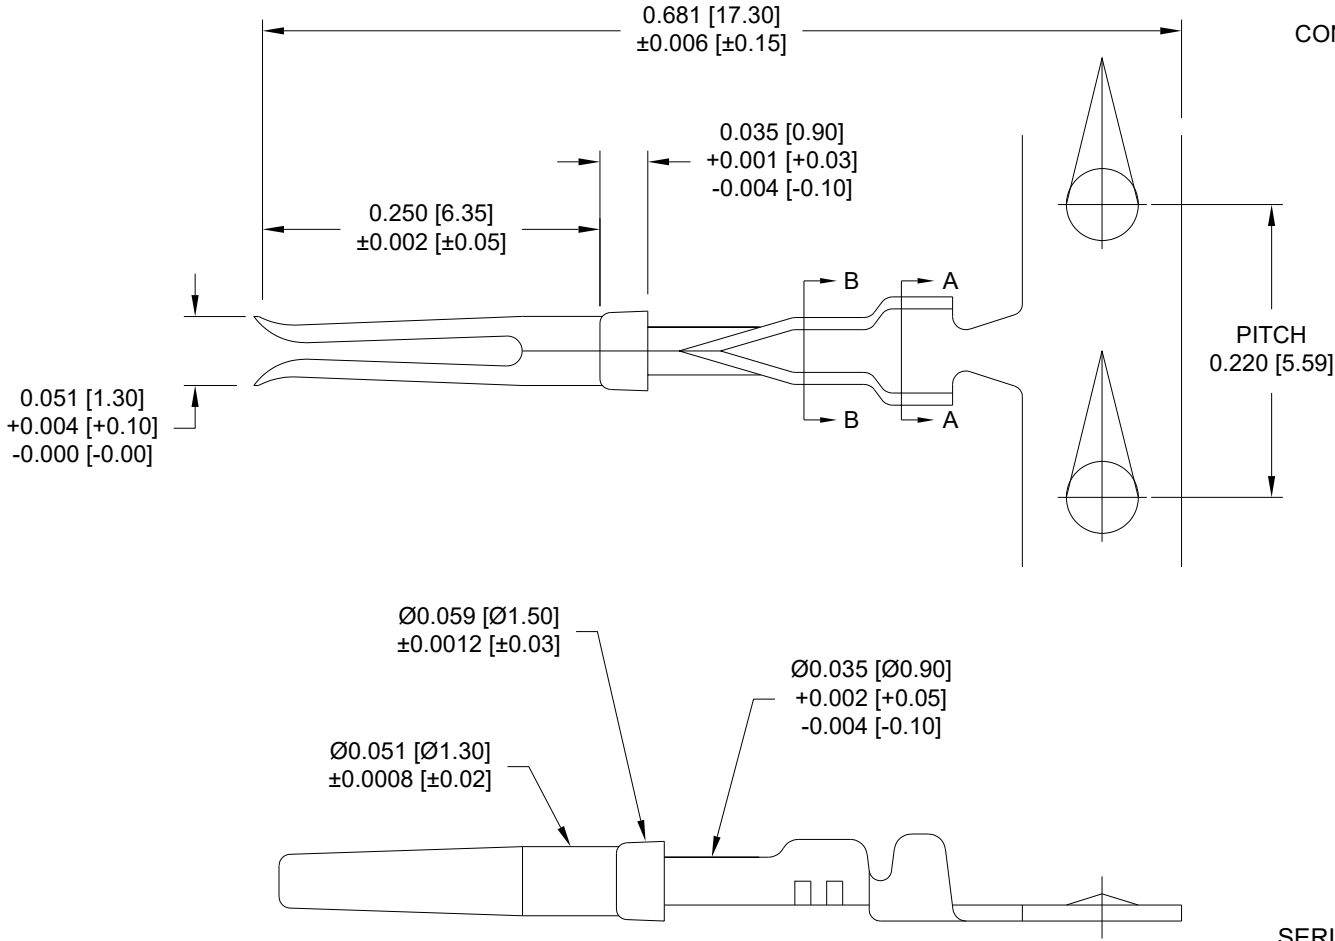

FOR CLARITY
HIDDEN LINES
NOT SHOWN

180-Y02-170L001

SERIES _____
TYPE _____
0 = REEL (10,000 per reel)
1 = LOOSE (500 per bag)
GENDER _____
2 = FEMALE
PLATING _____
1 = SELECTIVE / 10µ" MATING AREA / NICKEL CRIMP AREA
3 = SELECTIVE / 50µ" MATING AREA / NICKEL CRIMP AREA

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
J. KADEL
DATE:
09/03/2019

UNITS = inch [mm]

DO NOT SCALE FROM DRAWING


NorComp

SCALE:
NTS
DWG NO.

SHEET 1 OF 2

REV 3

180-Y02-170L001

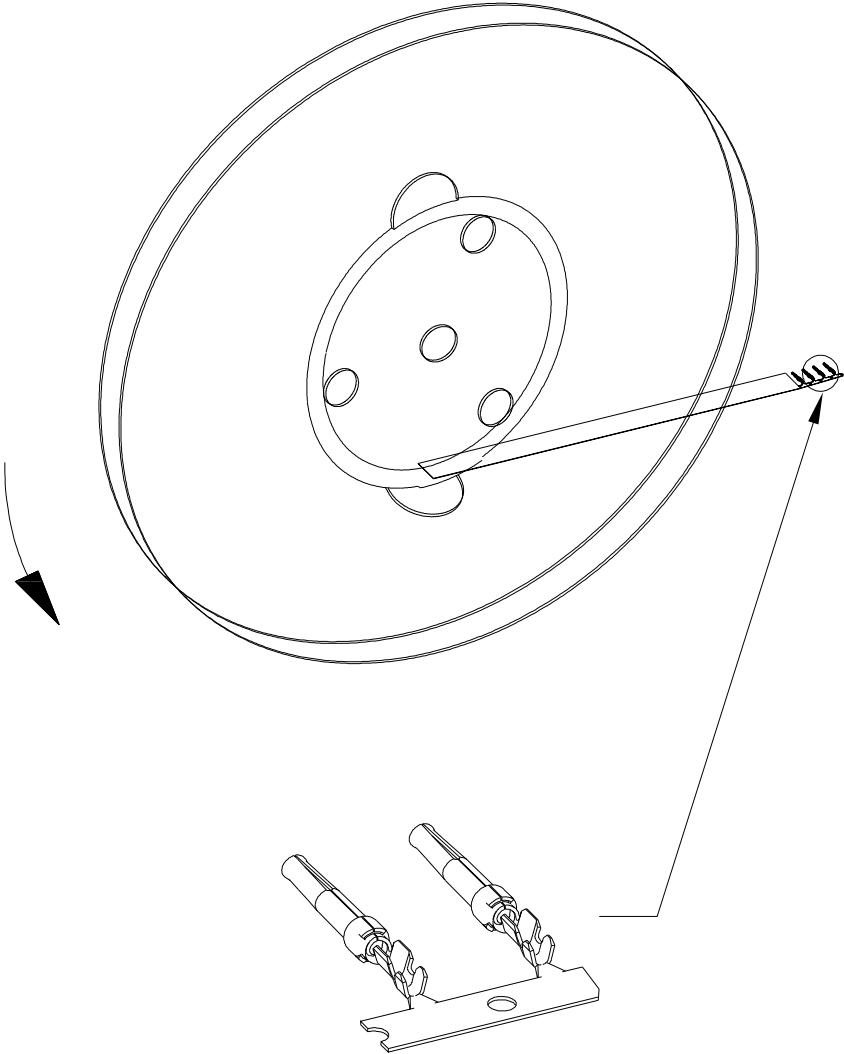

RoHS COMPLIANT

DRAWN:
J. KADEL

DATE:
09/03/2019

NorComp

DO NOT SCALE FROM DRAWING

SCALE: NTS	SHEET 2	OF 2	REV 3
DWG NO. 180-Y02-170L001			



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.