



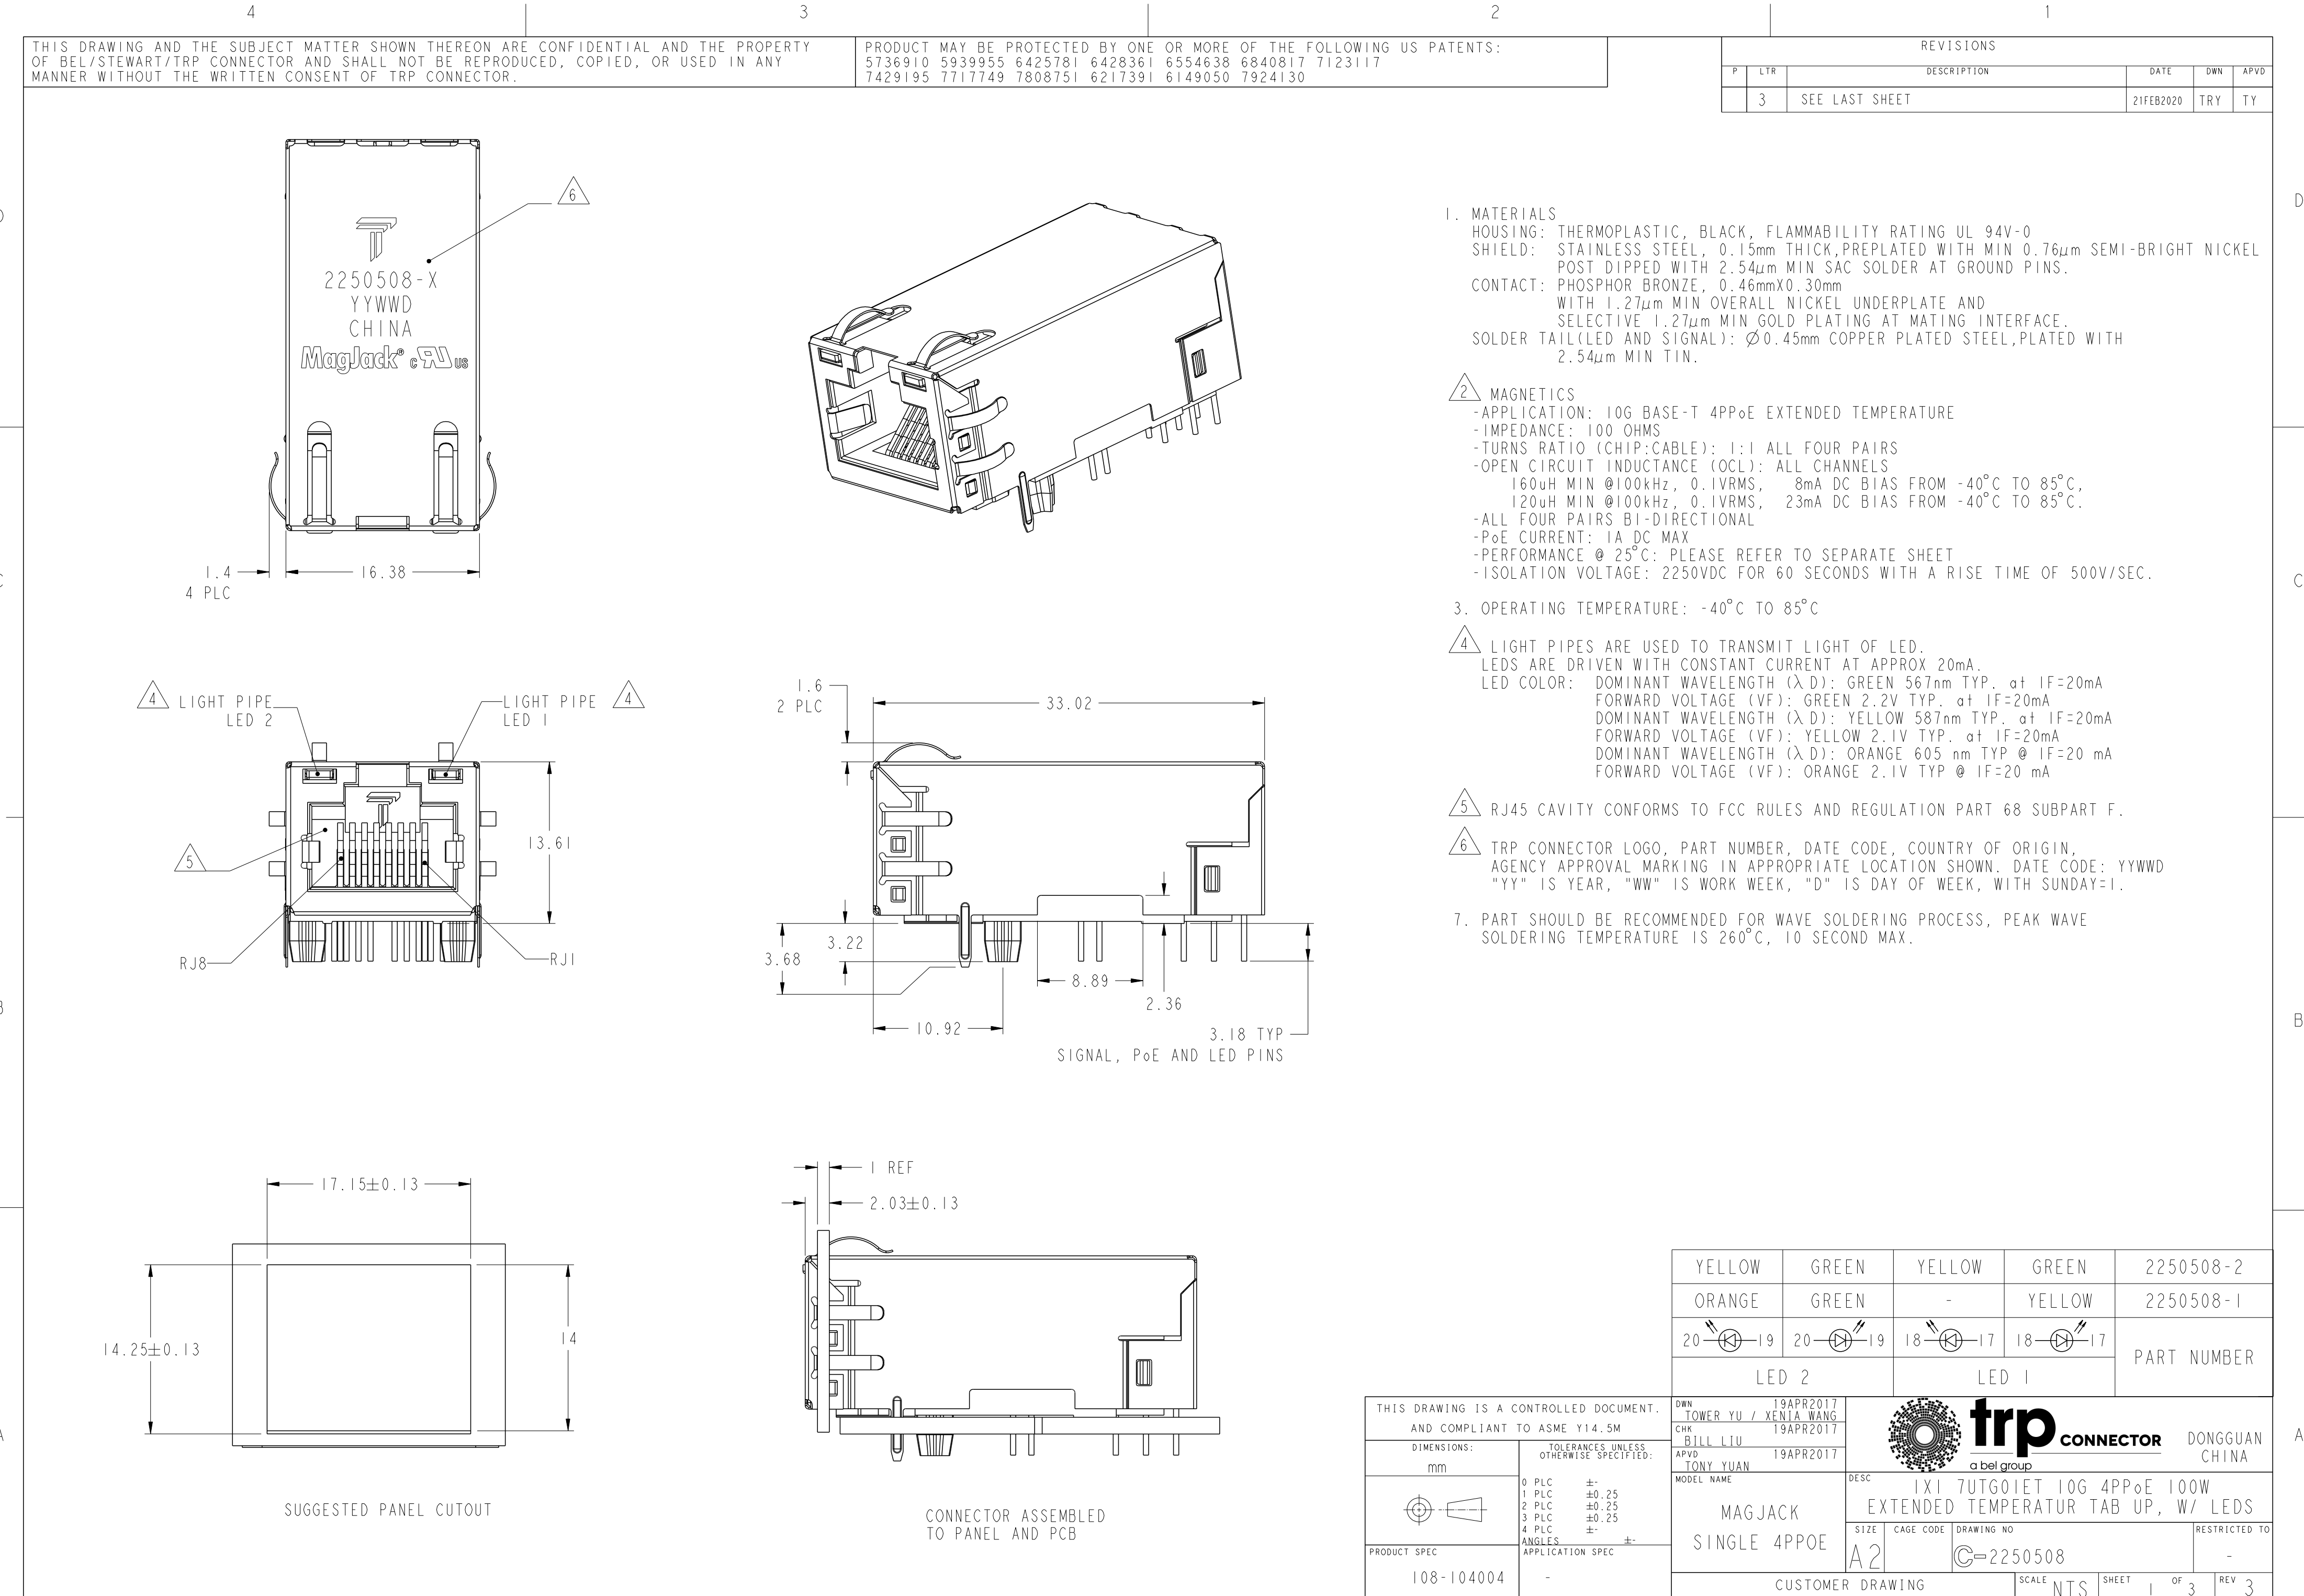


7UTG01ET 10G BASE-T 100W CIRCUIT


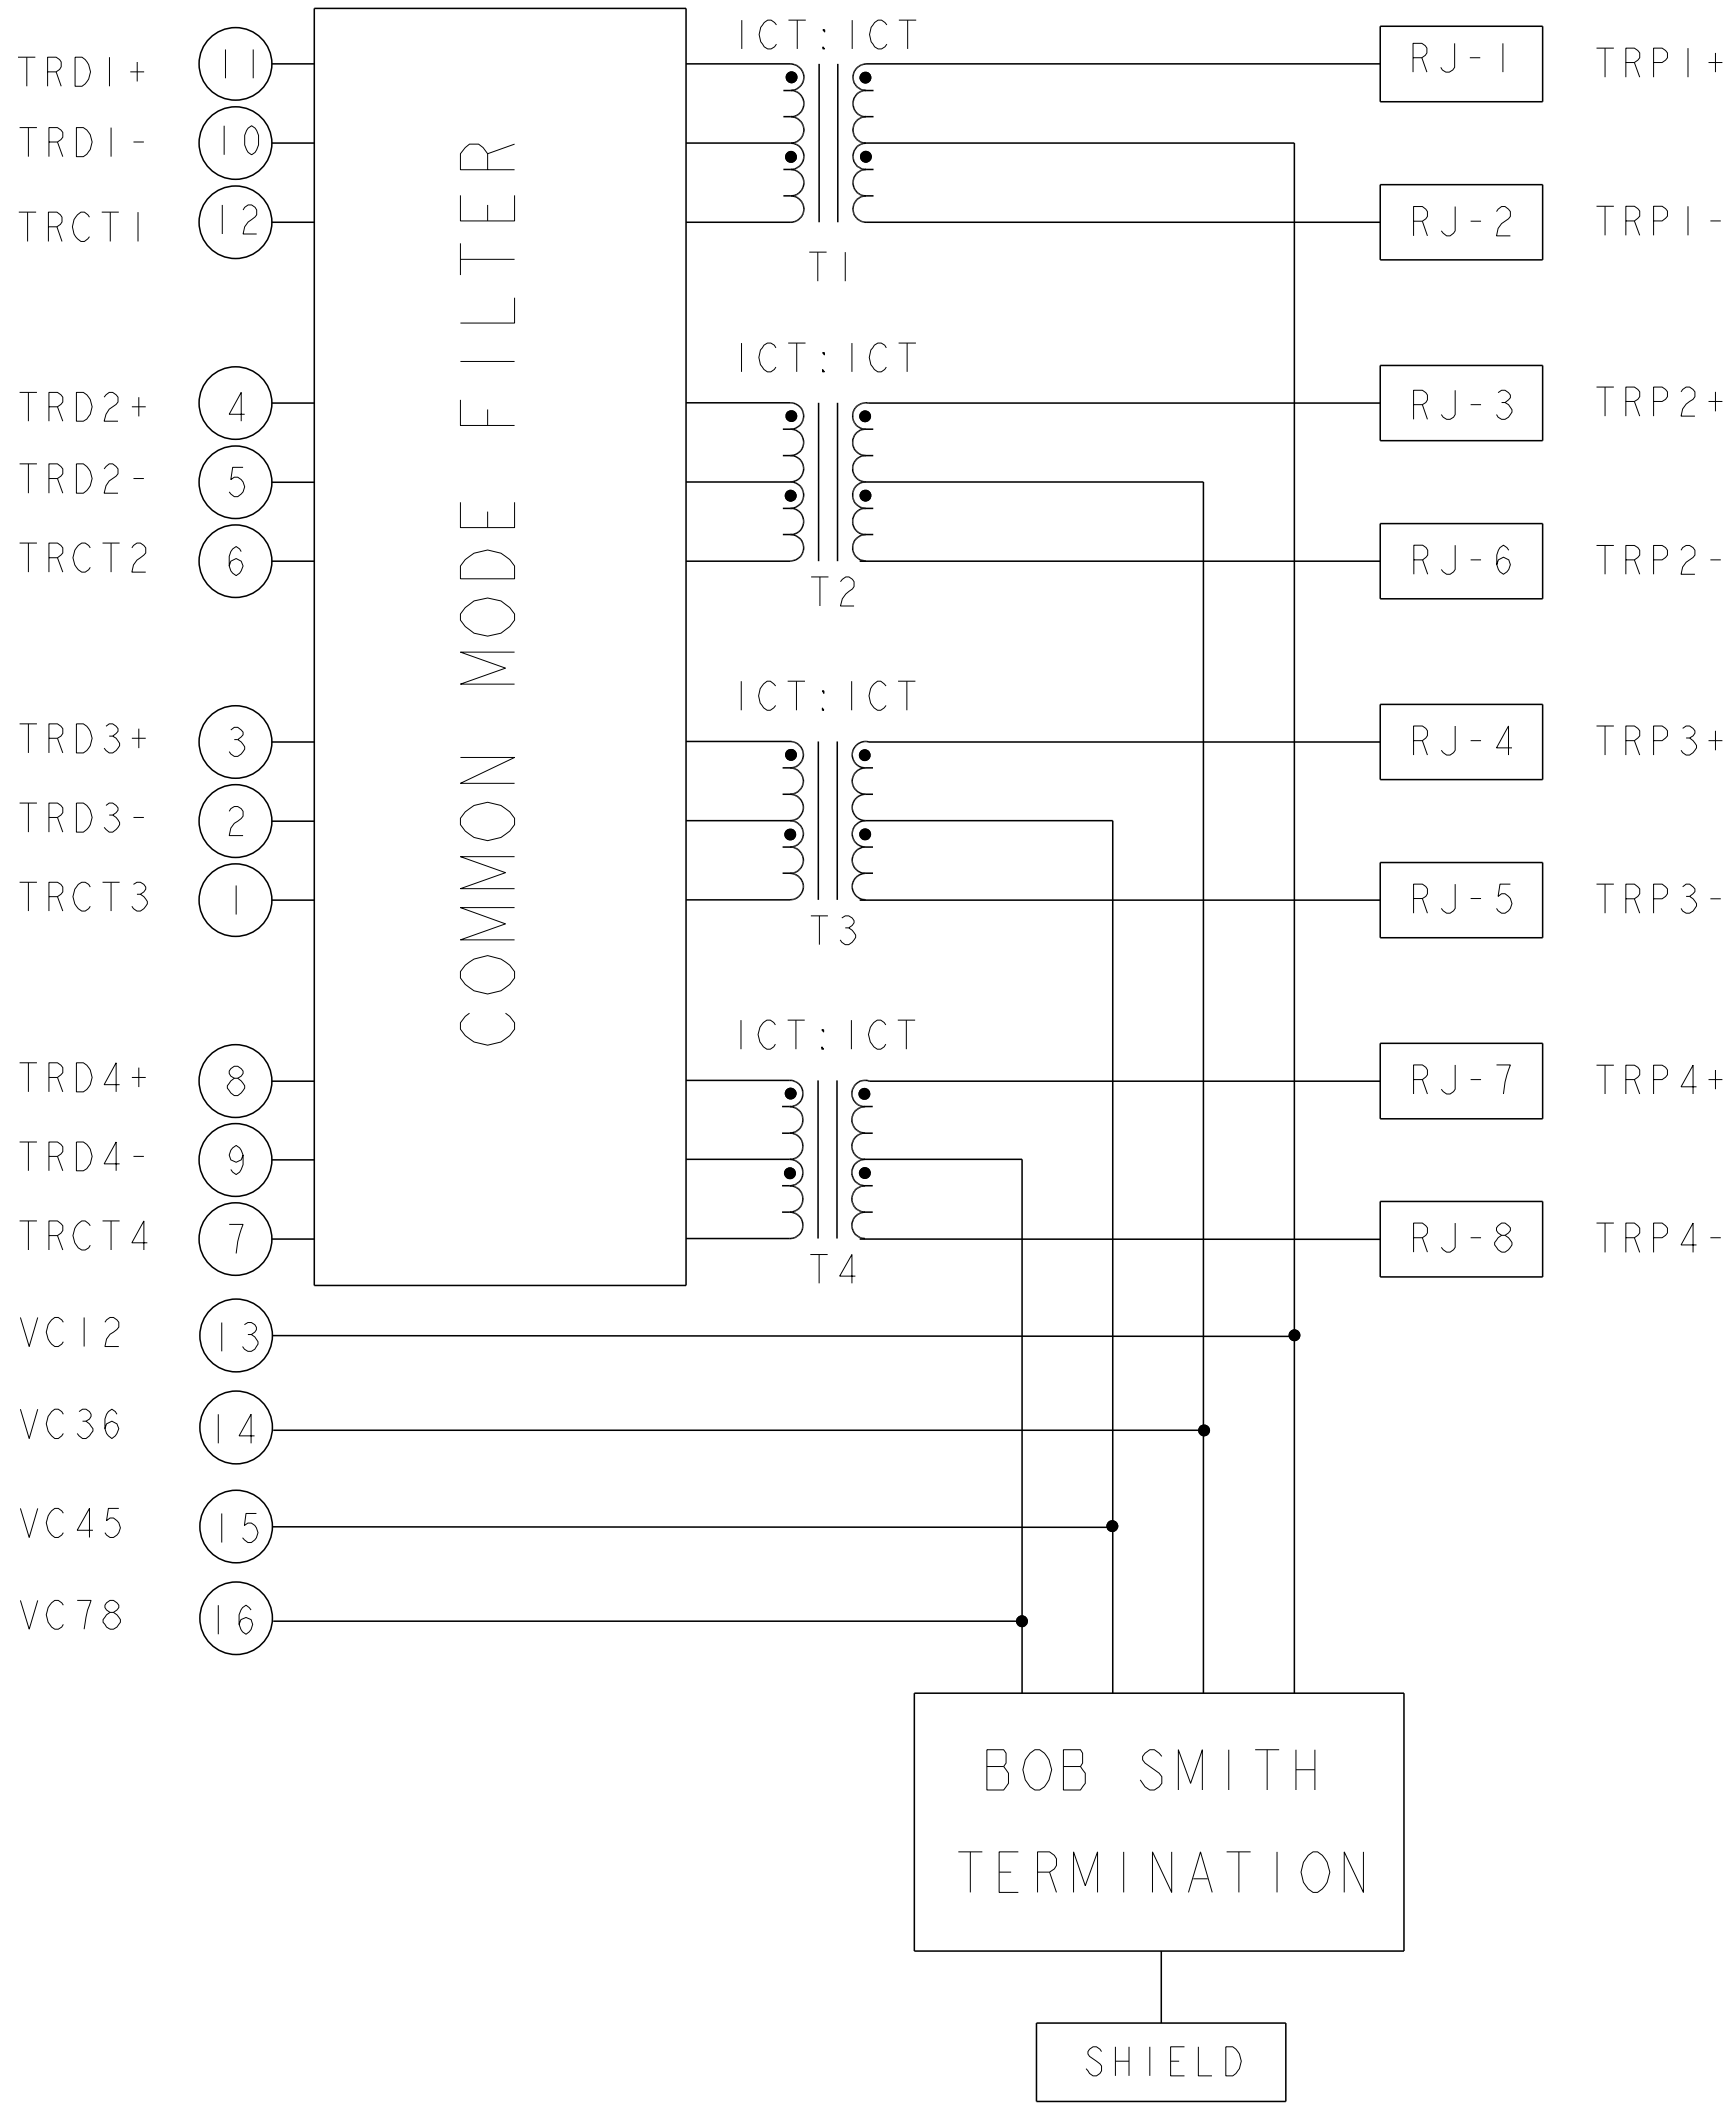


THE SHADED AREA OF CUSTOMER PC BOARD IS EQUIVALENT TO RJ CABLE SIDE PINS, IT IS RECOMMENDED THAT AREA TO BE CLEAR OF ANY COMPONENTS, VIA HOLES AND TRACES TO AVOID HI-POT FAILURE

IT IS RECOMMENDED THAT TARTAN SHADING AREA OF CUSTOMER PC BOARD BE CLEAR OF ANY COMPONENTS

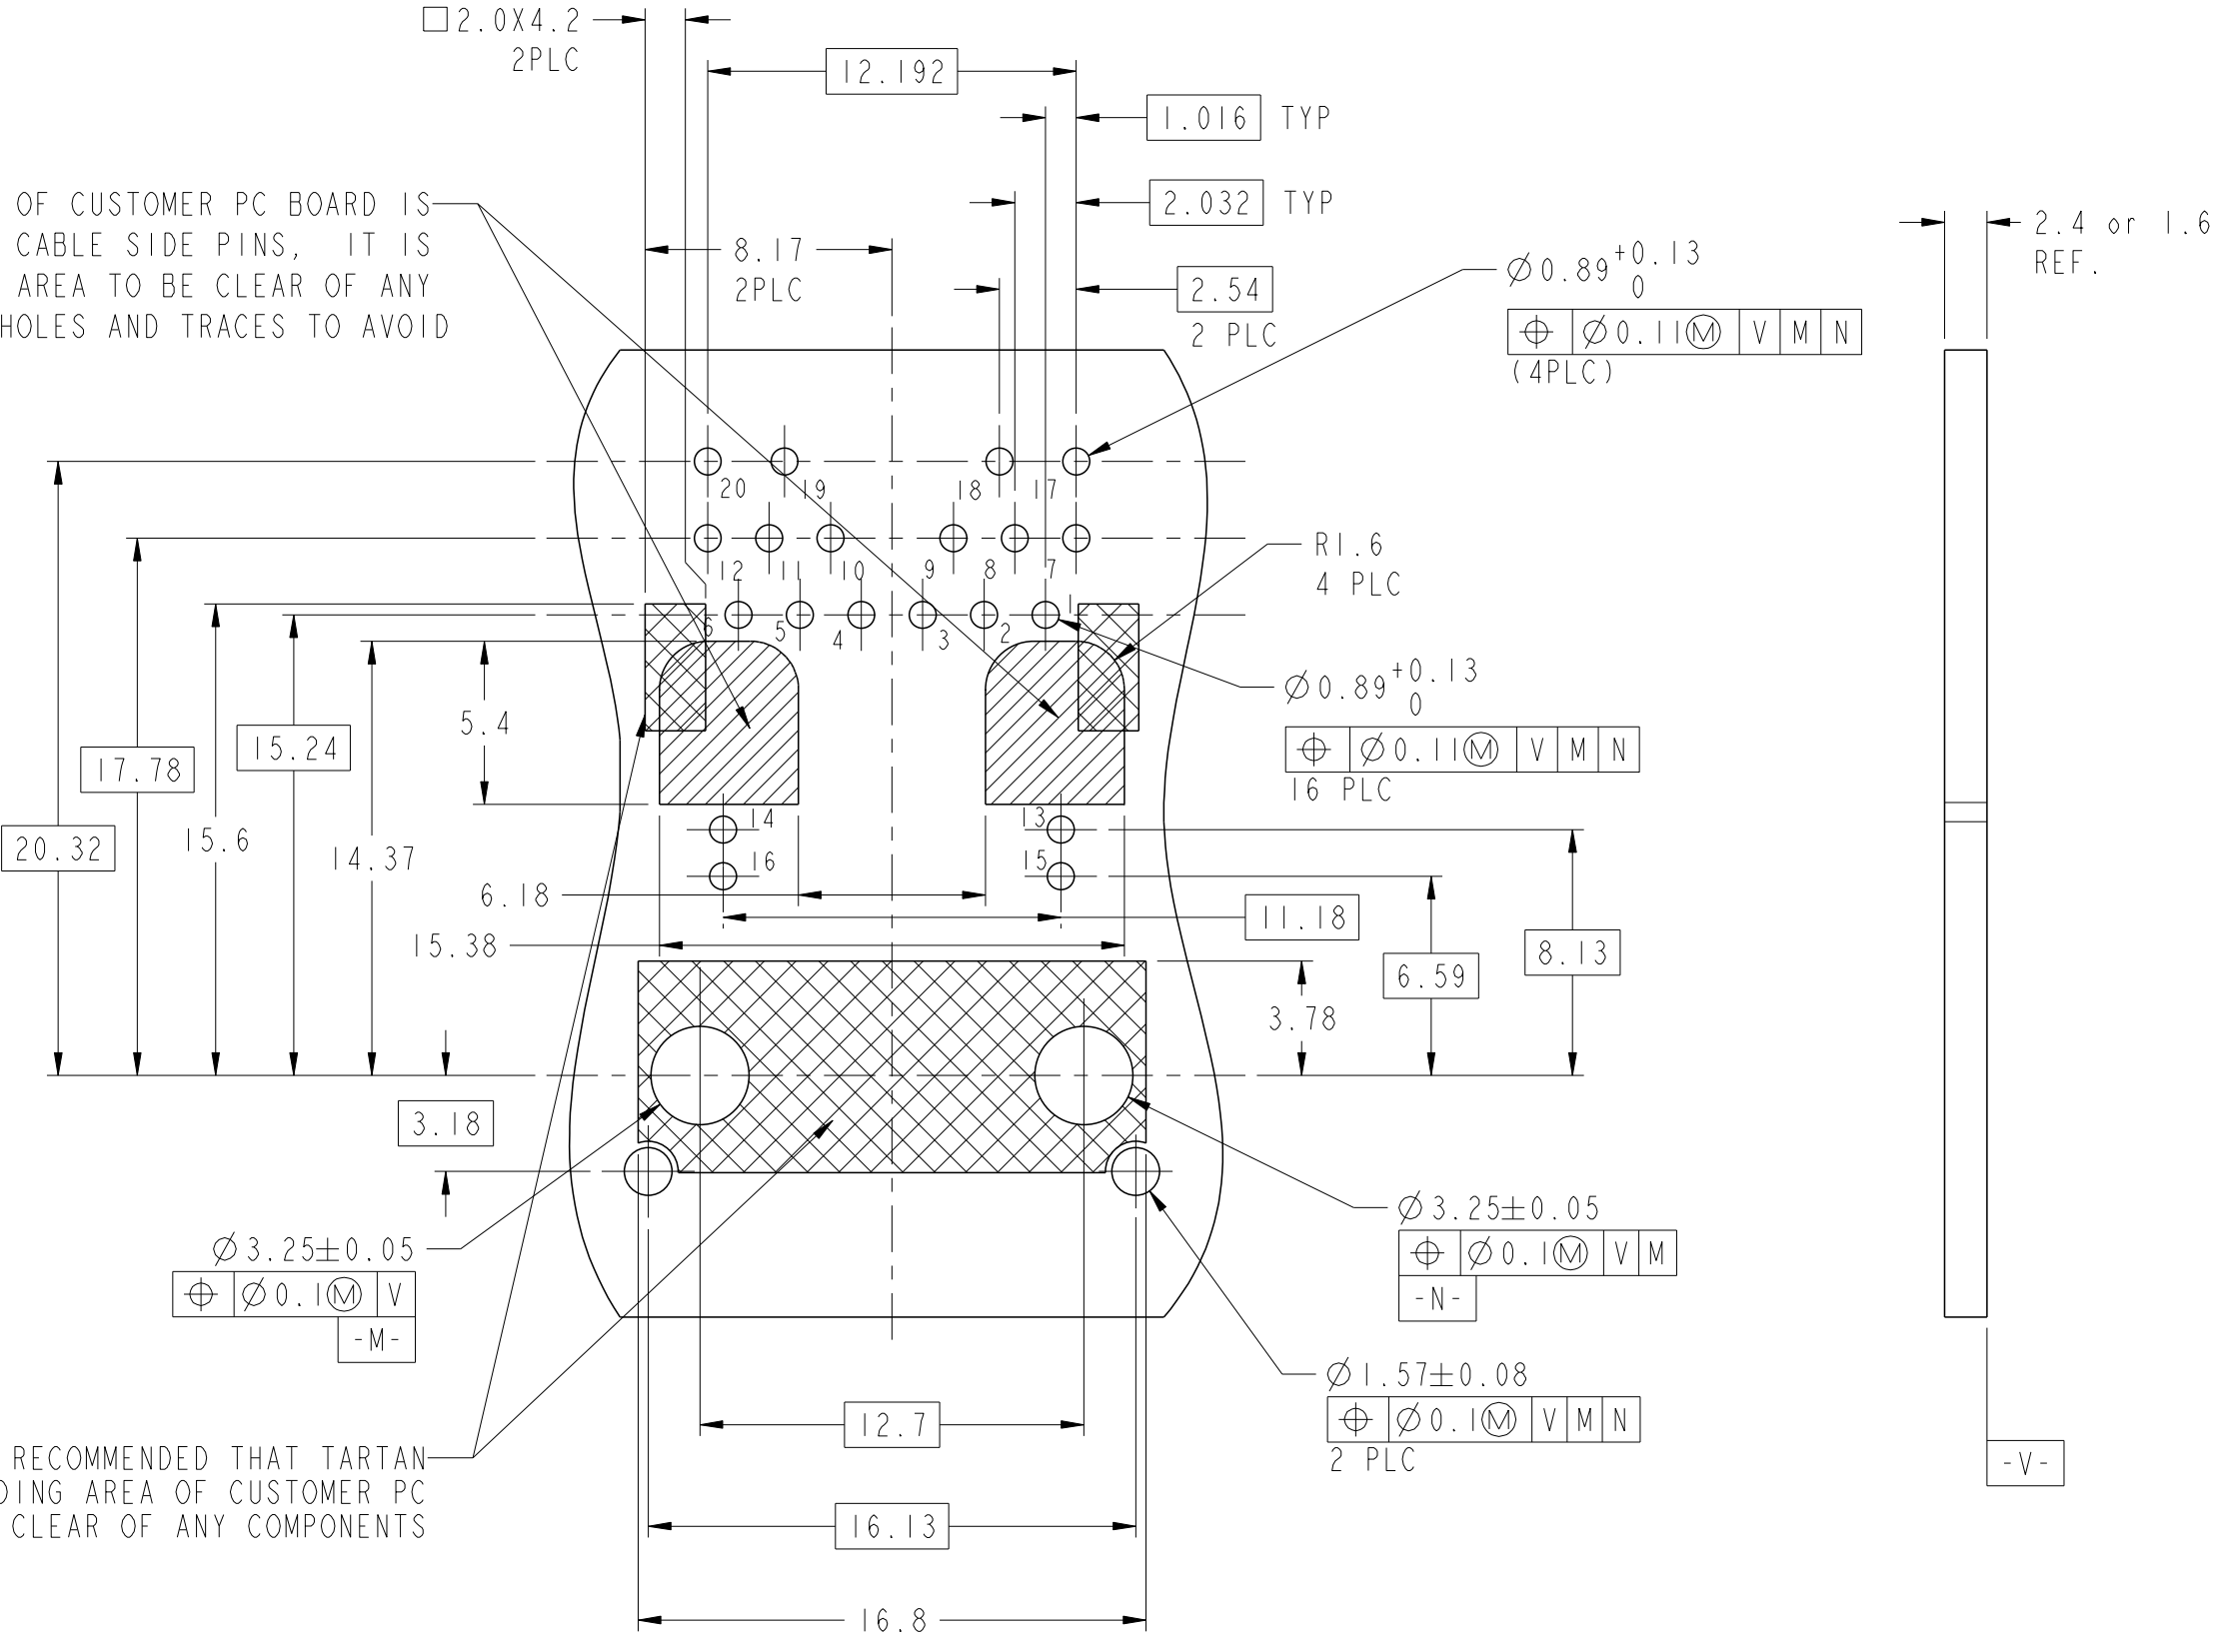

SUGGESTED PCB FOOTPRINT COMPONENT SIDE

THIS DRAWING IS A CONTROLLED DOCUMENT. AND COMPLIANT TO ASME Y14.5M		DWN TOWER YU / XENIA WANG 19APR2017	 trp CONNECTOR a bel group		DONGGUAN CHINA	
DIMENSIONS: mm		CHK BILL LIU 19APR2017				
		APVD TONY YUAN 19APR2017	DESC 1X1 7UTG01ET 10G 4PPoE 100W EXTENDED TEMPERATUR TAB UP, W/ LEDS			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±0.25 2 PLC ±0.25 3 PLC ±0.25 4 PLC ±- ANGLES ±- APPLICATION SPEC		MODEL NAME MAGJACK SINGLE 4PPOE				
PRODUCT SPEC 108-104004		SIZE A2		CAGE CODE	DRAWING NO C-2250508	RESTRICTED TO -
CUSTOMER DRAWING			SCALE NTS	SHEET 2	OF 3	REV 3

