
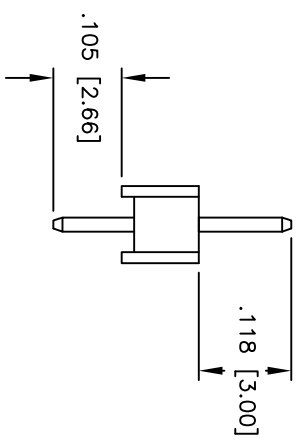
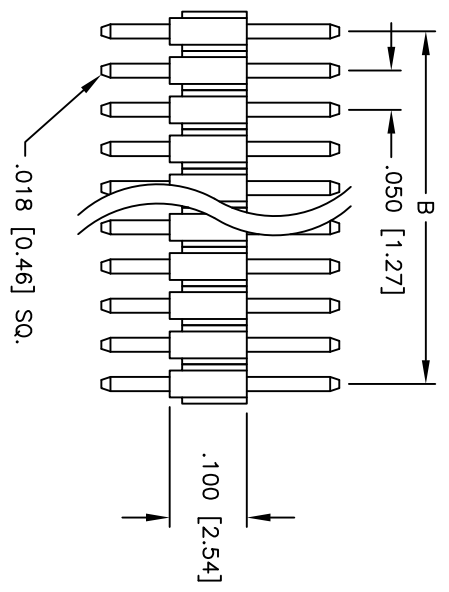
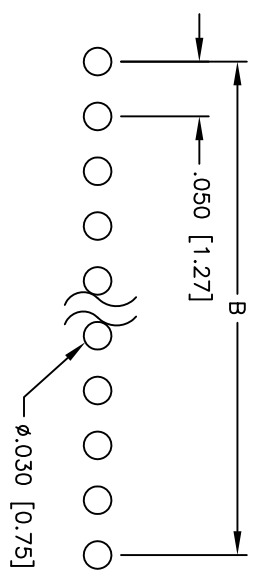


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/22/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

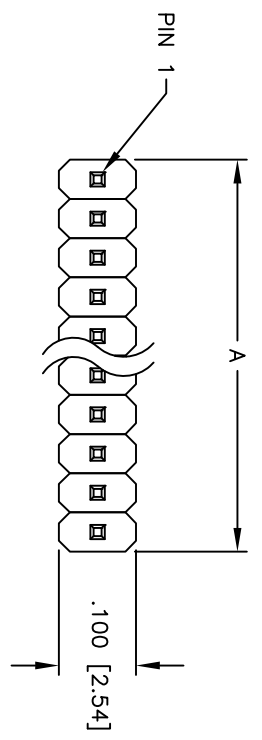

**SPECIFICATIONS:**

**Material:** Insulator: Hi-temp thermoplastic, rated UL 94V-0  
 Insulator color: Black  
**Contacts:** Brass  
**Plating:** Gold Flash over Nickel underplate overall.  
**Electrical:** Operating voltage: 250 VAC max.  
 Current rating: 1 Amp max.  
 Contact resistance: 20 mohms max. initial  
 Insulation resistance: 5,000 Mohms min.  
 Dielectric withstanding voltage: 1,000 VAC for 1 minute  
**Temperature Rating:** Operating temperature: -40°C to +105°C  
**Environmental:** Lead free, RoHS compliant

Positions: 02 thru 50  
 A = .050 [1.27] x No. of Positions Per Row  
 B = .050 [1.27] x No. of Spaces

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .050 [1.27] SINGLE ROW PIN HEADER  
 GOLD PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
INCHES		HOLE SIZE	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XXX	± .015
.XXX	± .015	Ø.XXX	± .010
APPROVALS		DATE	
DRAWN	DY	1/22/10	
CHECKED			
APPROVED			
SIZE	PART NO.	HPH1-B-XX-UA	REV.
X			
REF:	S00039T	SCALE: NTS	SHEET 1 OF 1

