


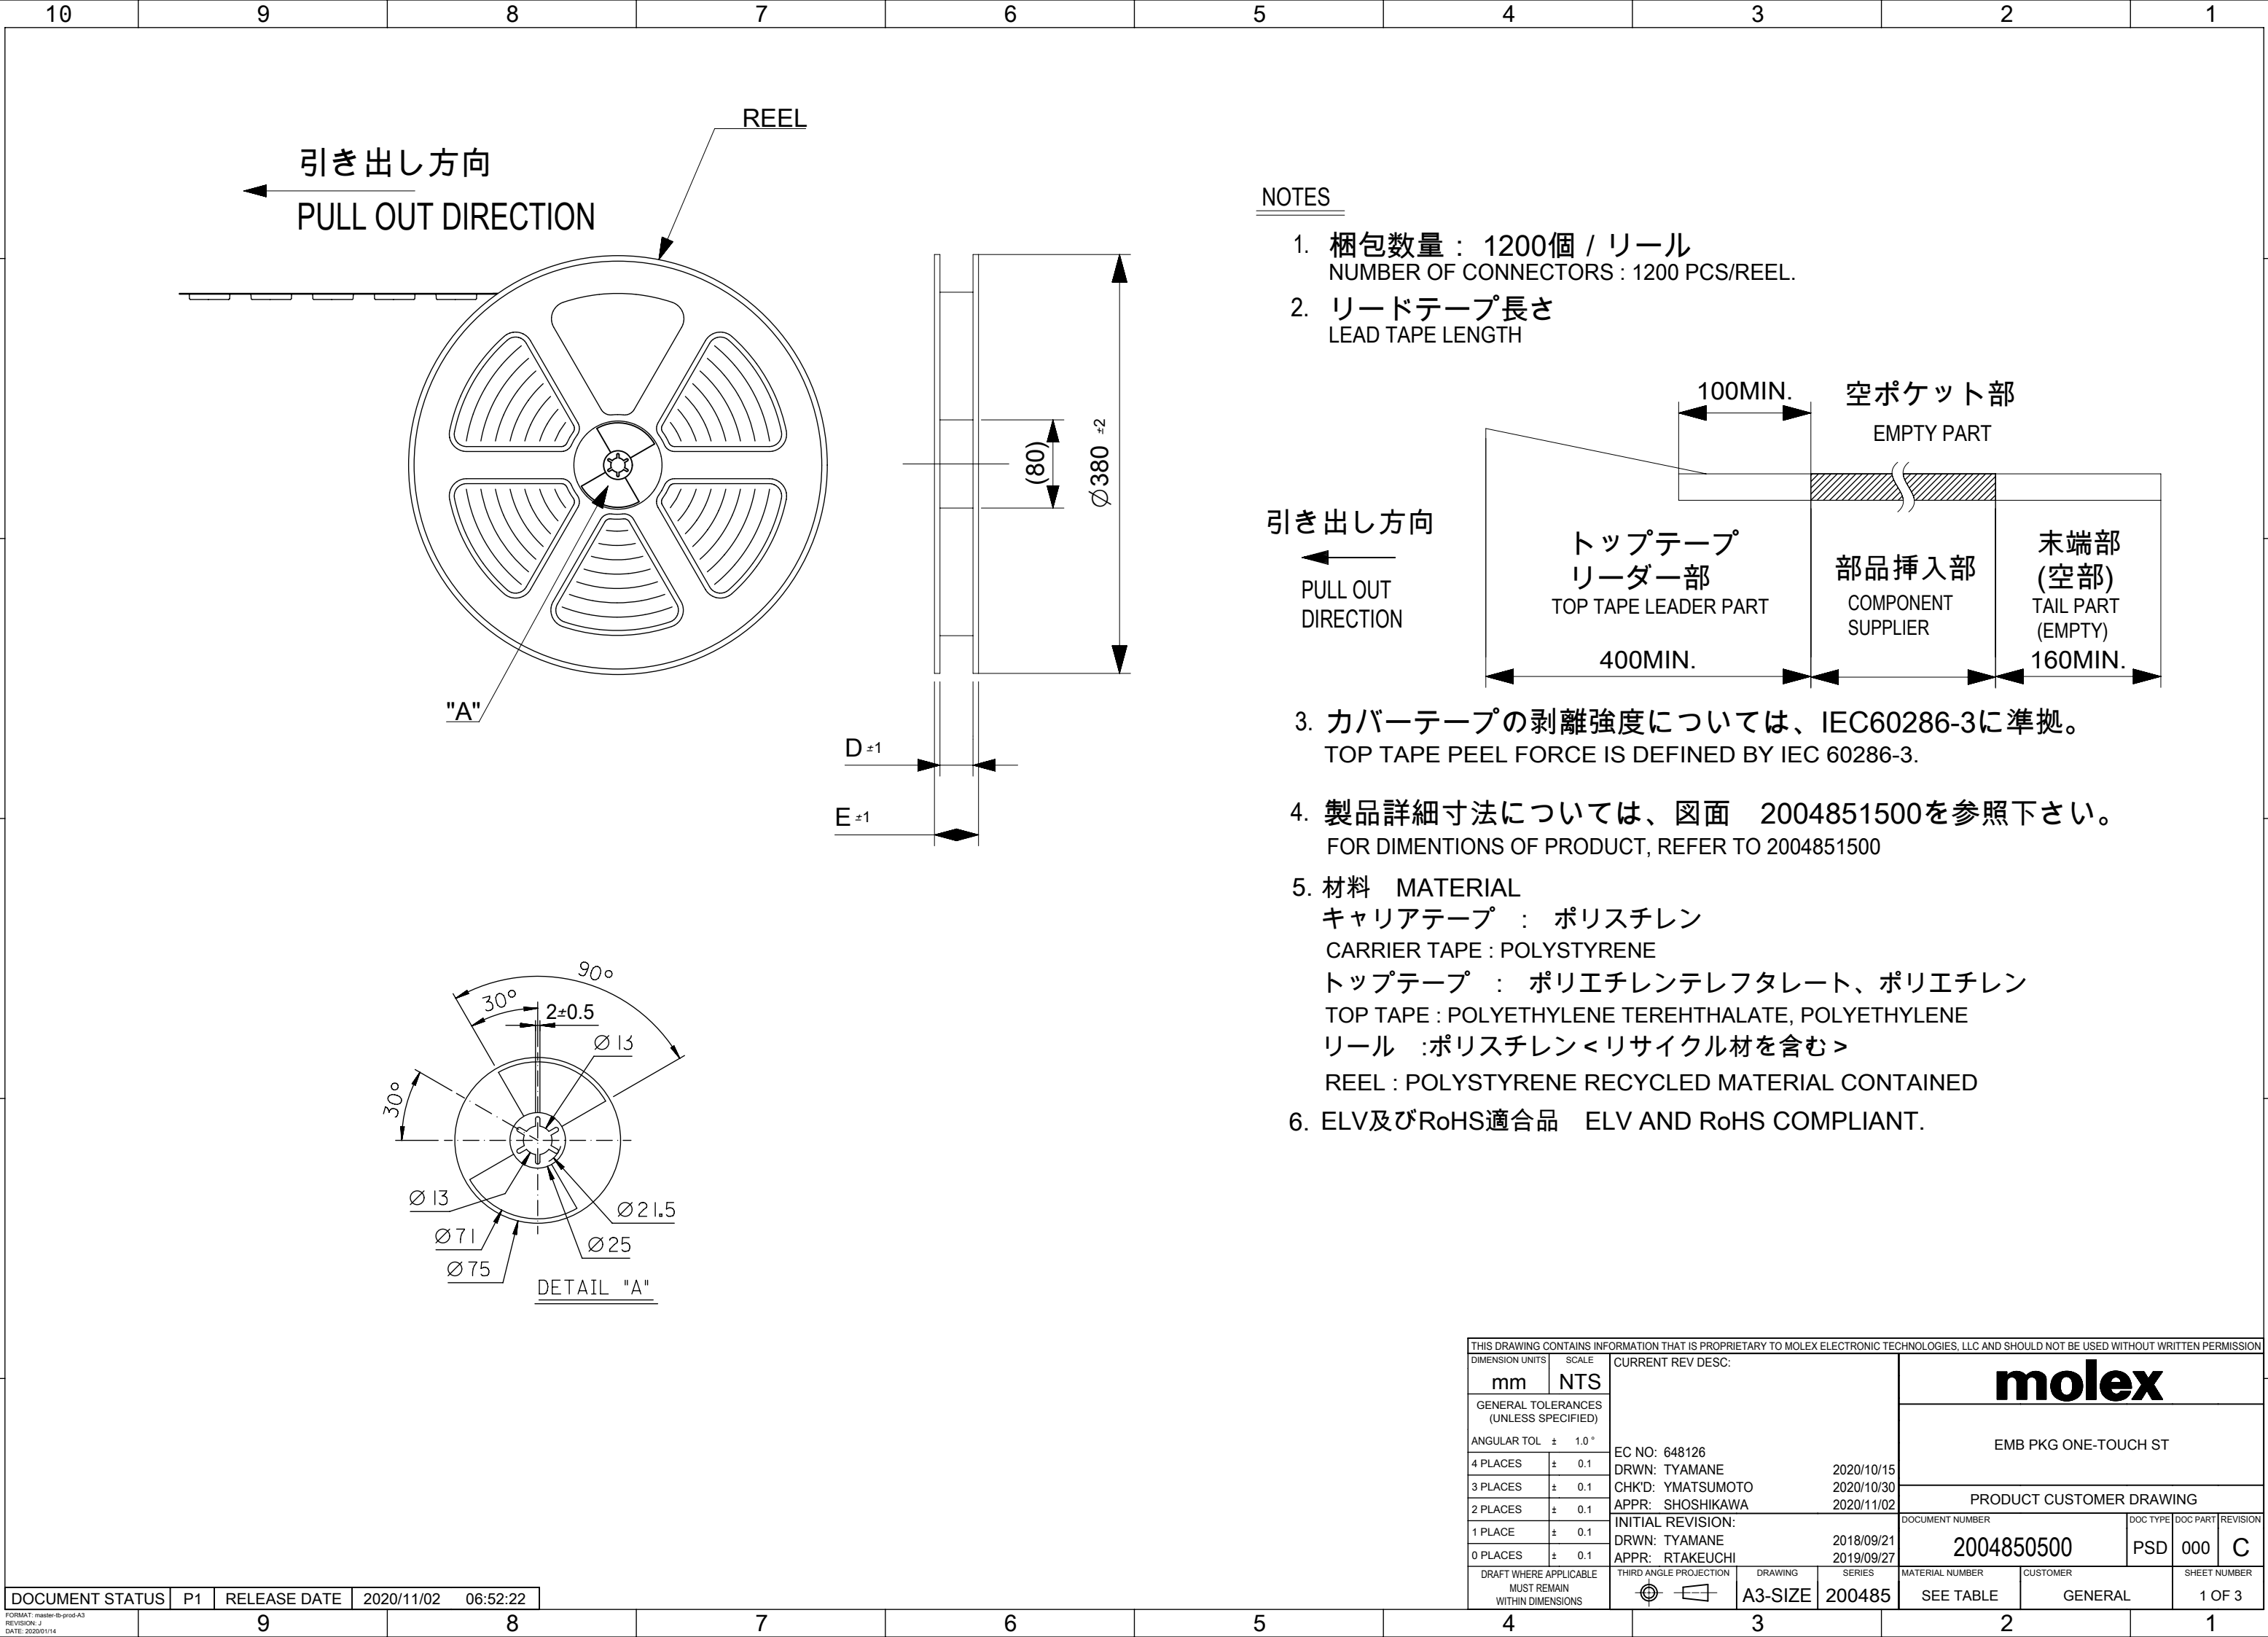

NOTES

1. 梱包数量： 1200個 / リール
NUMBER OF CONNECTORS : 1200 PCS/REEL.

2. リードテープ長さ
LEAD TAPE LENGTH
- 引き出し方向
PULL OUT DIRECTION

100MIN.

空ポケット部
EMPTY PART

部品挿入部
COMPONENT
SUPPLIER

末端部
(空部)
TAIL PART
(EMPTY)
160MIN.

400MIN.

トップテープ
リーダー部
TOP TAPE LEADER PART
3. カバーテープの剥離強度については、IEC60286-3に準拠。
TOP TAPE PEEL FORCE IS DEFINED BY IEC 60286-3.

4. 製品詳細寸法については、図面 2004851500を参照下さい。
FOR DIMINTIONS OF PRODUCT, REFER TO 2004851500

5. 材料 MATERIAL
キャリアテープ：ポリスチレン
CARRIER TAPE : POLYSTYRENE
トップテープ：ポリエチレンテレフタレート、ポリエチレン
TOP TAPE : POLYETHYLENE TEREHTHALATE, POLYETHYLENE
リール：ポリスチレン<リサイクル材を含む>
REEL : POLYSTYRENE RECYCLED MATERIAL CONTAINED

6. ELV及びRoHS適合品 ELV AND RoHS COMPLIANT.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE		CURRENT REV DESC:				molex	
mm		NTS							
GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 648126 DRWN: TYAMANE2020/10/15 CHK'D: YMATSUMOTO2020/10/30 APPR: SHOSHIKAWA2020/11/02 INITIAL REVISION: DRWN: TYAMANE2018/09/21 APPR: RTAKEUCHI2019/09/27					
ANGULAR TOL ± 1.0 °									
4 PLACES		± 0.1							
3 PLACES		± 0.1							
2 PLACES		± 0.1							
1 PLACE		± 0.1							
0 PLACES		± 0.1							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES	
						A3-SIZE		200485	

$$\overline{(1.85)}$$
 0.50 ± 0.05 (1.85)

A

$$1.50^{+0.10}_{-0.00}$$
 $0.20_{\pm 0.05}$ $H_{\pm 0.10}$

(G)

1.75

A logic diagram showing a NOT gate (inverter). The input is labeled 'A' and the output is labeled 'A-bar' (A with a horizontal bar over it).

1

(1.40)

累積ピッチ
ACCUMULATED PITCH

 4.0 ± 0.10 40 ± 0.20 12.0 ± 0.10

$\varnothing 1.50^{+0.10}_{-0.00}$

(3.82)

(5.85)

$$(3.86)$$

(6.57)

SECTION B-B

CONNECTOR NO. 20048515**

EMBOSSSED PACKAGE
オーダー番号 ORDER NO.

molex


EMB PKG ONE-TOUCH ST


PRODUCT CUSTOMER DRAWING

21	DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
27	2004850500	PSD	000	C

MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
SEE TABLE	GENERAL	3 OF 3


9

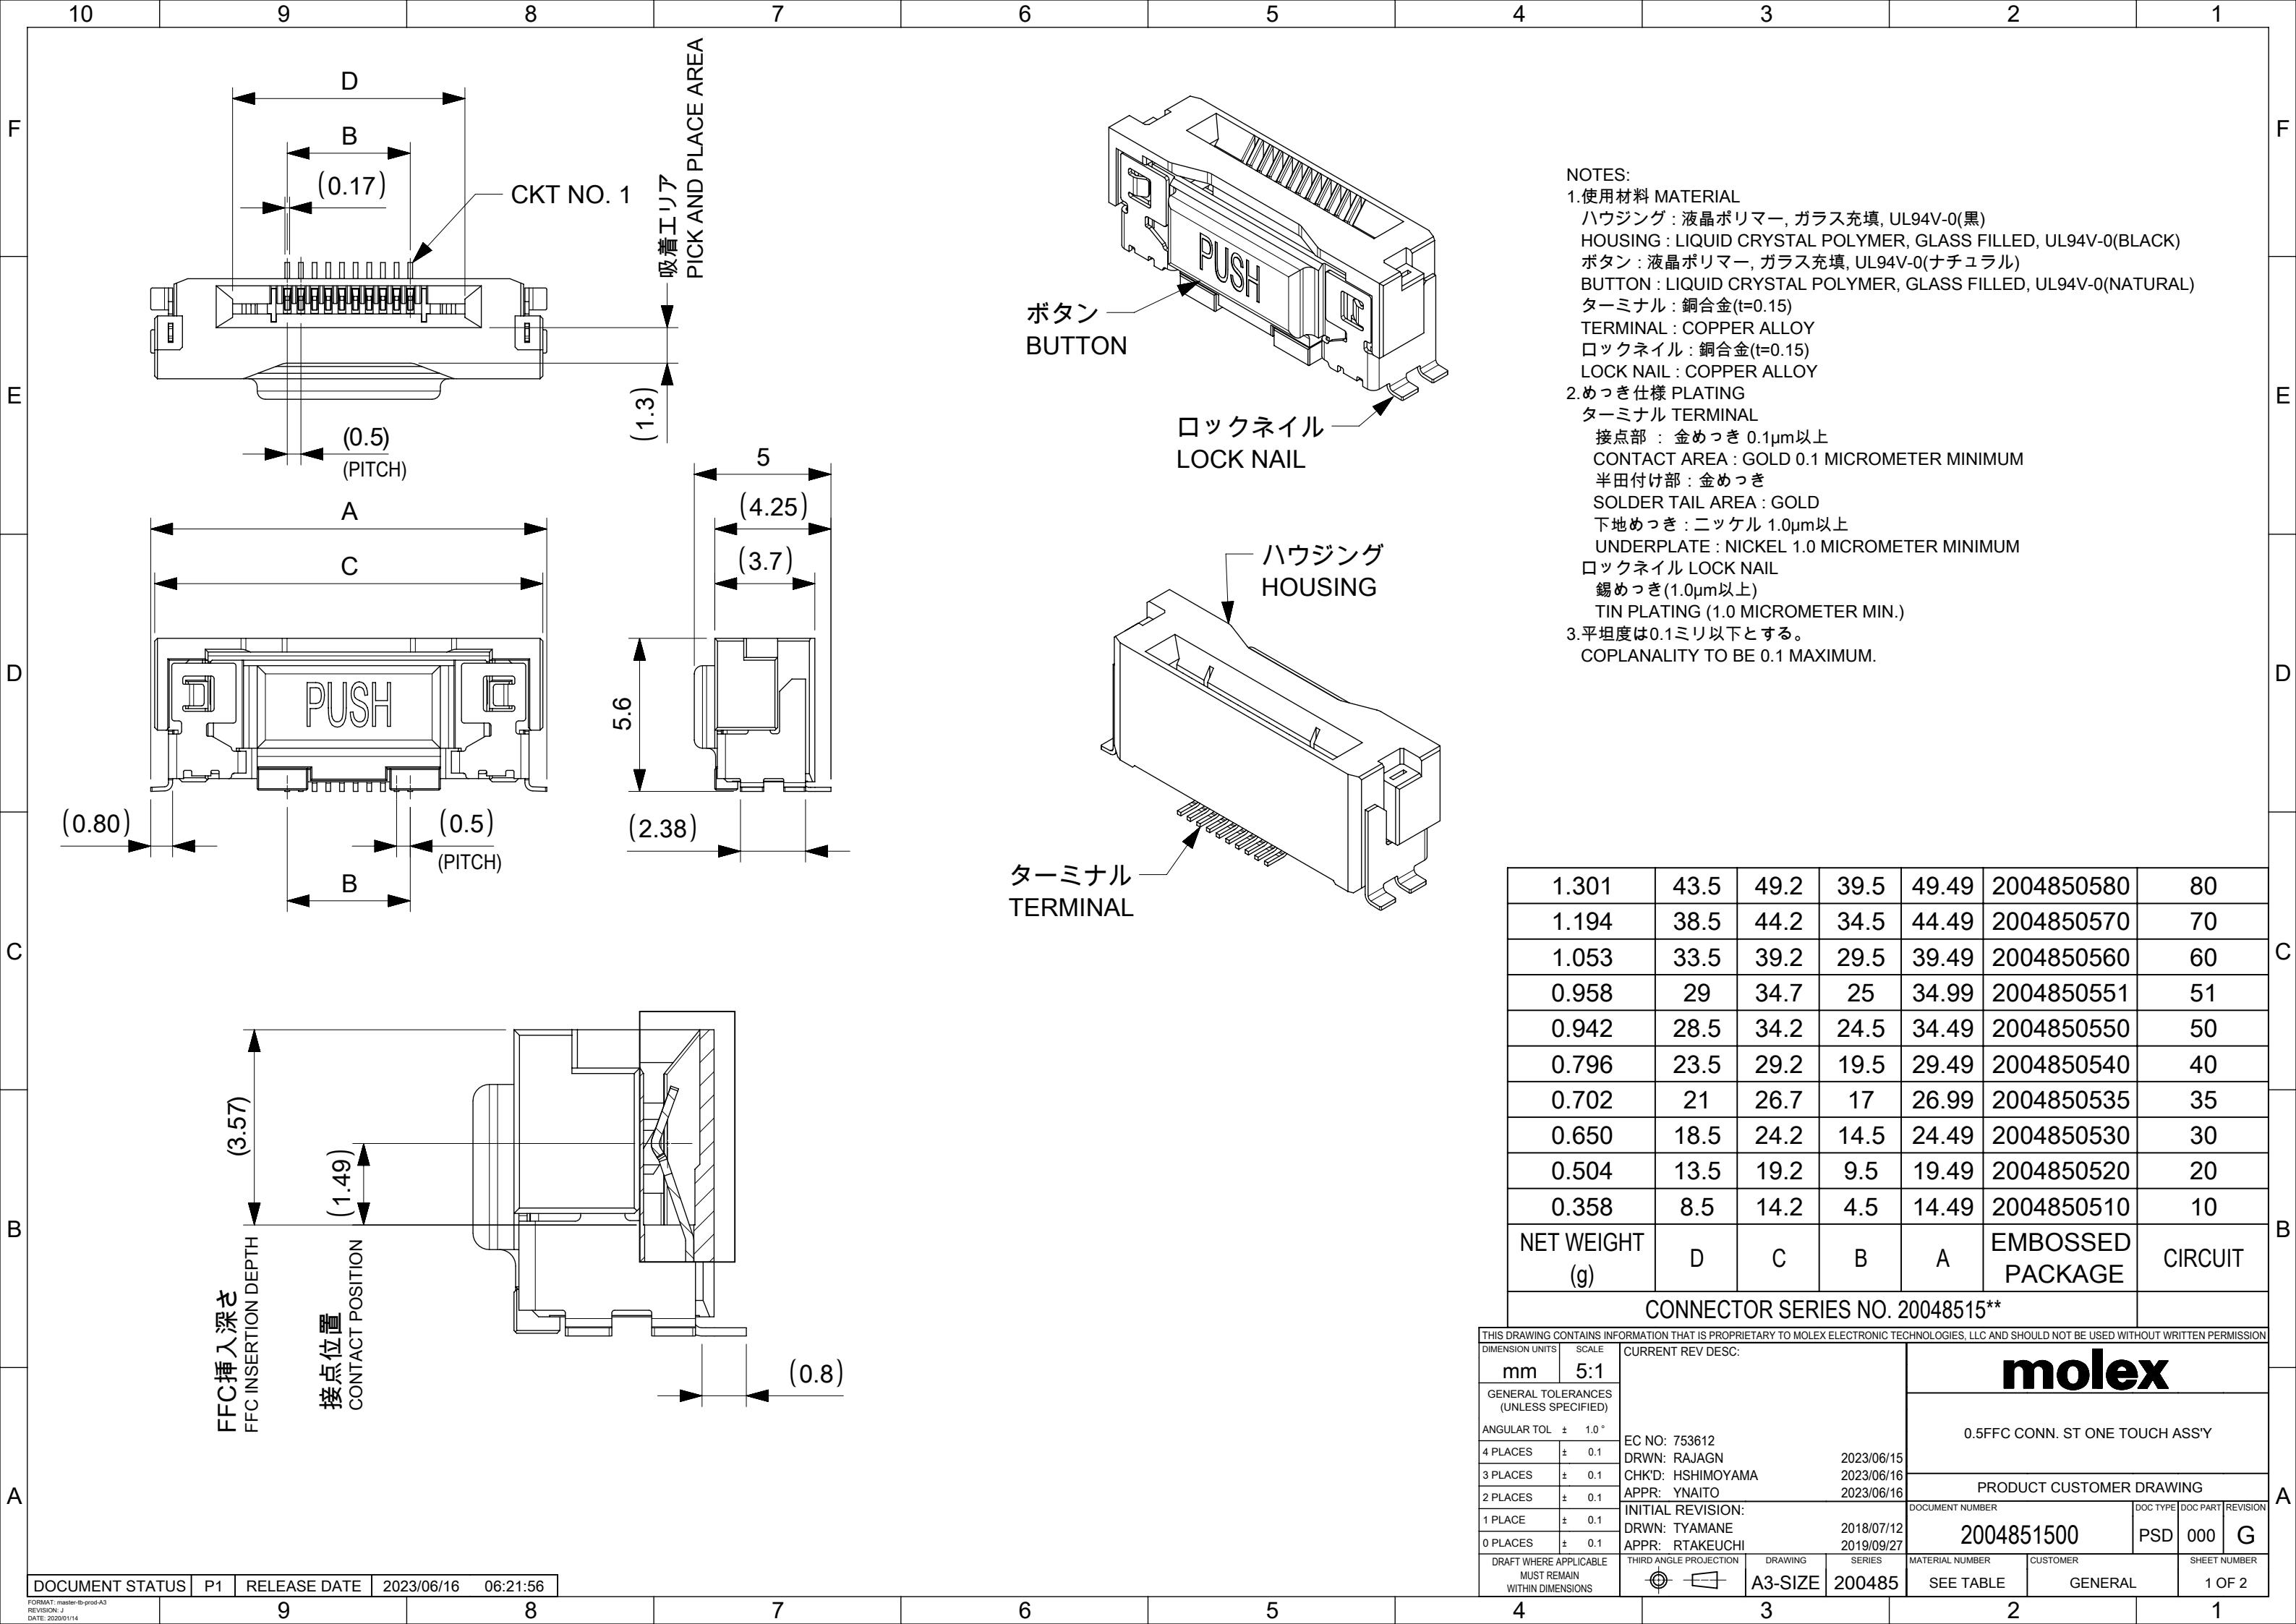

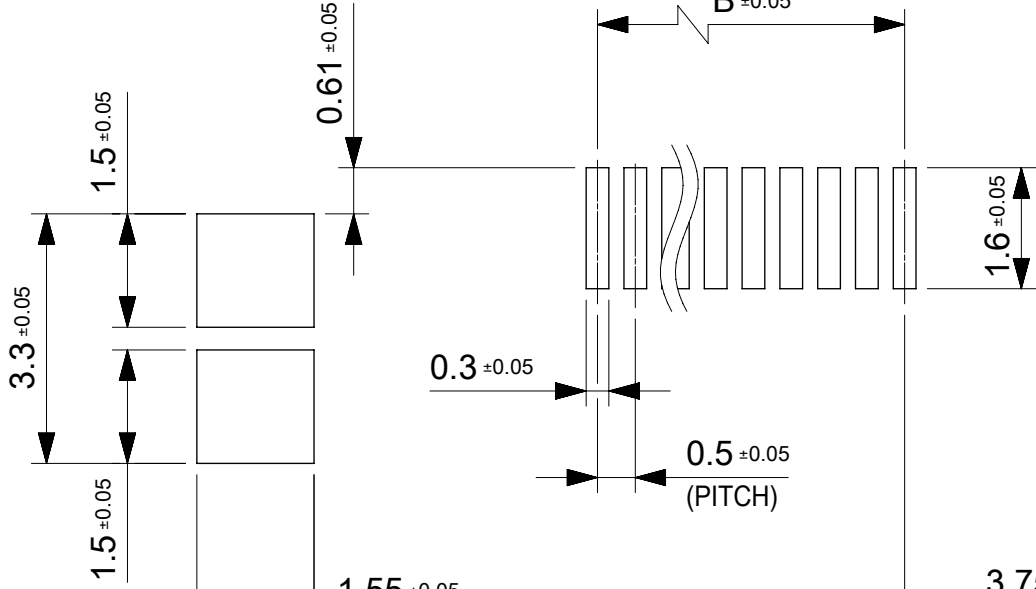


推獎PWB寸法

推奨メタルマスク厚、開口率: $t=0.12\text{mm}$, 80%
RECOMMENDED METAL MASK THICKNESS, APERTURE RATIO: $t=0.12\text{mm}$, 80%
ロックネイル部開口率は100%
APERTURE RATIO FOR LOCK NAIL: 100%

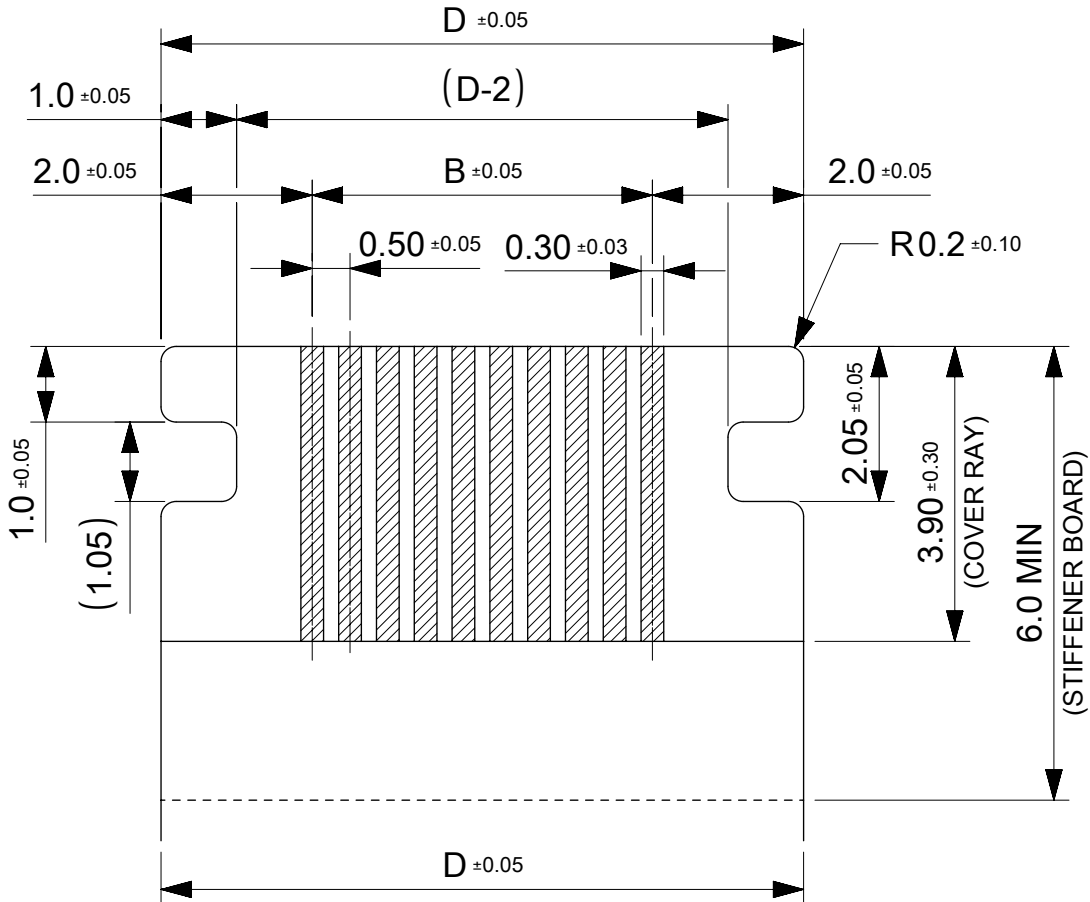

推廣FFC寸法

抜き方向は導体側から補強版側を推奨します
RECOMMENDED PUNCHING DIRECTION:
FROM CONDUCTOR SIDE TO STIFFENER SIDE

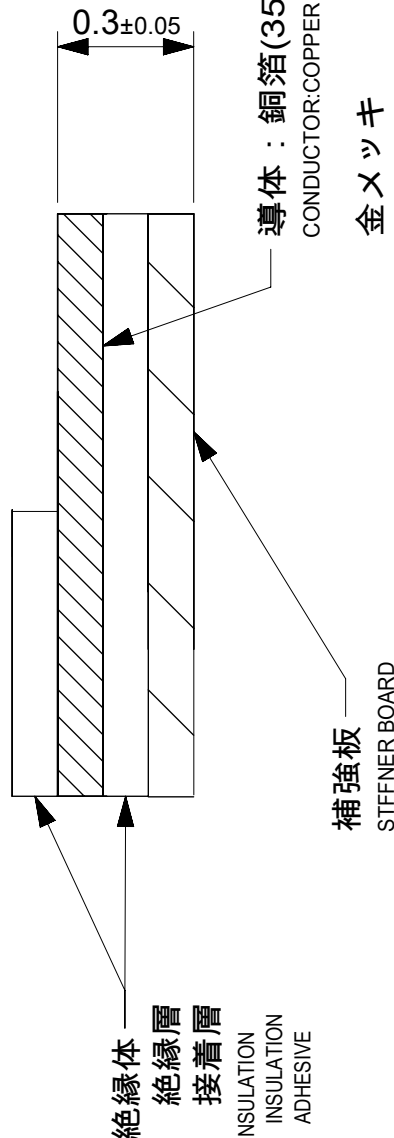

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
DIMENSION UNITS		SCALE		CURRENT REV DESC:				molex							
mm		10:1													
GENERAL TOLERANCES (UNLESS SPECIFIED)				0.5FFC CONN. ST ONE TOUCH ASSY											
ANGULAR TOL ± 1.0 °															
4 PLACES ± 0.1				PRODUCT CUSTOMER DRAWING											
3 PLACES ± 0.1															
2 PLACES ± 0.1															
1 PLACE ± 0.1				DOCUMENT NUMBER 2004851500				DOC TYPE PSD		DOC PART 000		REVISION G			
0 PLACES ± 0.1															
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING A3-SIZE		SERIES 200485		MATERIAL NUMBER SEE TABLE		CUSTOMER GENERAL		SHEET NUMBER 2 OF 2	
				EC NO: 753612											
				DRWN: RAJAGN 2023/06/15											
				CHK'D: HSHIMOYAMA 2023/06/16											
				APPR: YNAITO 2023/06/16											
				INITIAL REVISION:											
				DRWN: TYAMANE 2018/07/12											
				APPR: RTAKEUCHI 2019/09/27											