


PRODUCT NUMBER
10119333-YXX-XXLF

EXTENDED RANGE

- TOOLING FEASIBILITY CONFIRMED
- SAMPLES ON DEMAND
- AVAILABILITY ON DEMAND




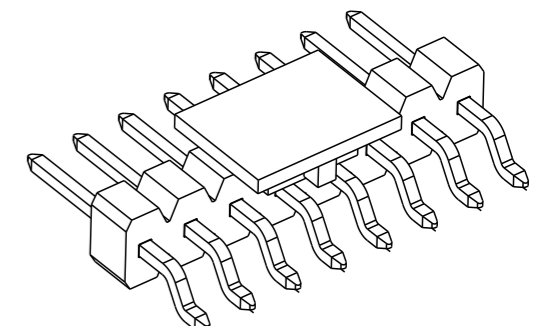


PLATING (AS AVAILABLE)
1=0.76µm GXT/GOLD ON CONTACT
2µm TIN MIN ON TAILS
4=2µm TIN MIN FULL PLATED

RoHS COMPATIBLE
SEE NOTE 4
TOTAL NUMBER OF POSITIONS :
02 TO 15 POS

PIN STYLE, SEE TABLE (AS AVAILABLE)
PACKAGING, SEE NOTE 3 (MAY BE SUBJECT TO TOOLING FEES)

STYLE	DIM"A"±0.2
01	5.84
02	8.08
03	10.67
04	3.00

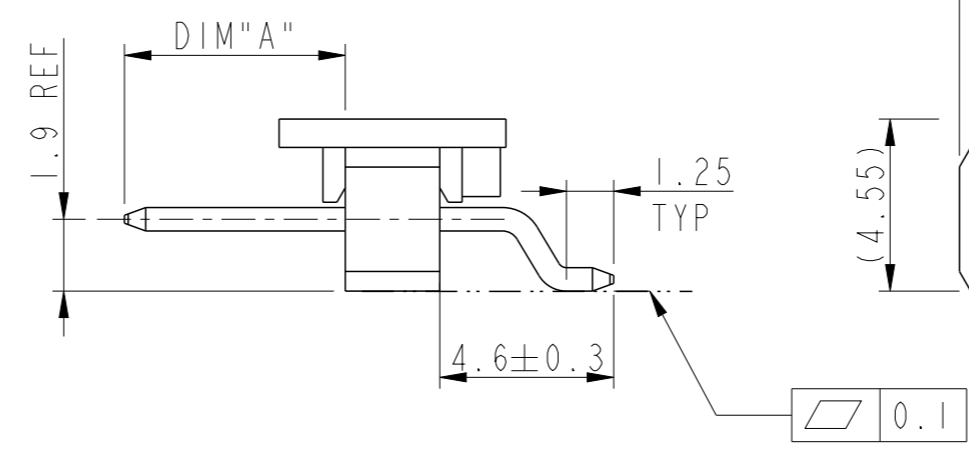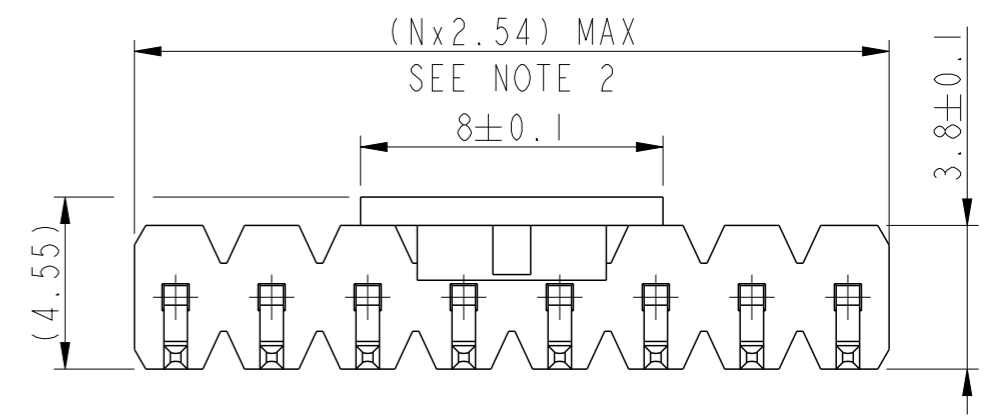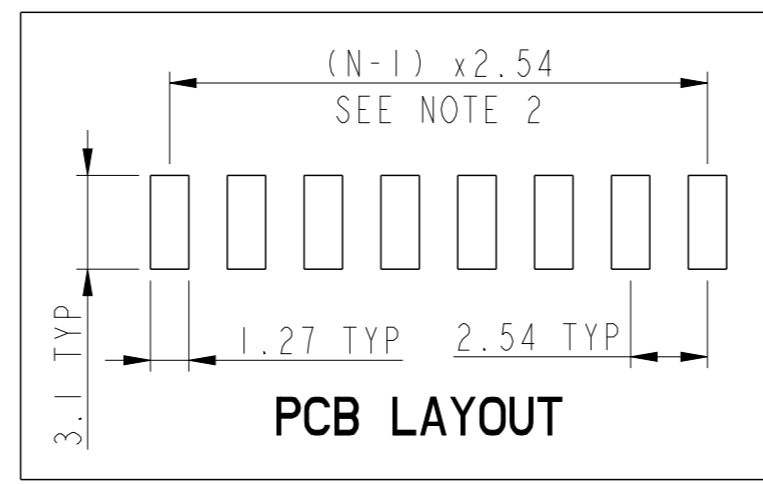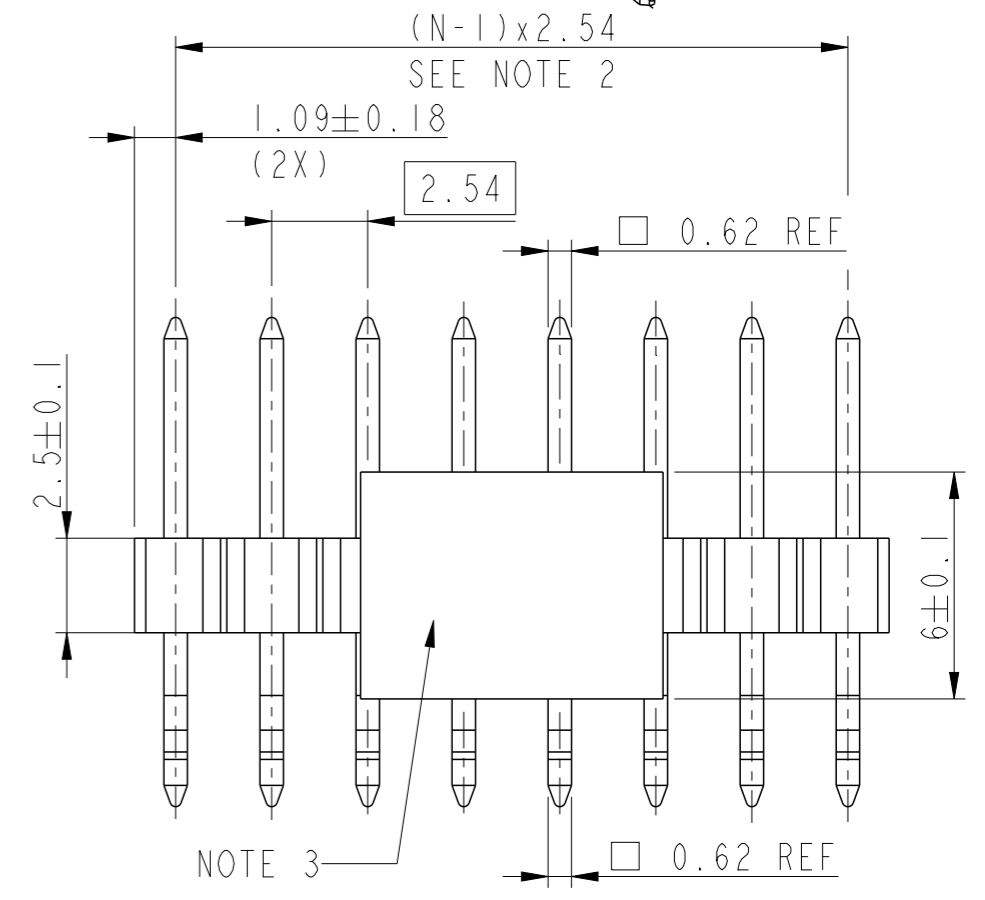

- NOTES:
- MATERIAL:
 - BODY: HIGH TEMPERATURE THERMOPLASTIC UL94V-0 COLOR BLACK
 - PIN: COPPER ALLOY
 - TO DETERMINATE DIMENSIONS:
 - N = NUMBER OF POSITIONS
 - EXAMPLE: 8 POS x 2.54=20.32
 - PACKAGING:
 - A = TAPE & REEL PACKAGING WITH PICK -UP CAP AS PER GS-14-2357
 - K = T&R PACKAGING WITHOUT PICK UP CAP, AS PER GS-14-2357
 - = POLYBAGS
 - RoHS COMPATIBLE PRODUCT SPECIFICATIONS:
 - PLATING:
 - "LF" MEANS THE PRODUCT IS LEAD FREE
 - 2µm MINIMUM MATTE TIN OVER 1.27µm MINIMUM NICKEL UNDERPLATED
 - MANUFACTURING PROCESS COMPATIBILITY:
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 30 SECONDS MAX IN CONVECTION, INFRA-RED OR VAPOR PHASE OR REFLOW OVEN
 - LABELLING:
 - MEETS PACKAGING SPECS AS PER GS-14-920
 - LEGAL STATEMENT: SEE GS-47-0004
 - PRODUCT SPECIFICATIONS AS PER BUS-12-114 EXCEPT PIN RETENTION FORCE 5N MIN.
 - THIS PART SERIES IS NOT INITIALLY INTENDED FOR AUTOMOTIVE APPLICATIONS. ADDITIONAL FEES ARE CHARGEABLE FOR ANY ADDITIONAL QUALIFICATION AND TEST REPORTS PERFORMED OUTSIDE THE SCOPE OF THE STANDARD PRODUCT SPECIFICATIONS.
 - UNLESS OTHERWISE APPROVED BY AMPHENOL, ALL PARTS AND COMPONENTS ARE DESIGNED & BUILT ACCORDING TO AMPHENOL'S SPECIFICATIONS WHICH ARE SUBJECT TO CHANGE WITHOUT NOTICE.

spec ref	dr Aymeric Soudy	2014/02/21	projection	MM	size A3	scale 5:1
tolerance std ISO 406 ISO 1101	eng Laurent Mulin	2025/04/02			ecn no ELX-F-5233-1	rel level Released
TOLERANCES UNLESS OTHERWISE SPECIFIED	chr -	-			product family BSTIK	
surface ISO 1302	appr Lamy, Alexandr	2025/04/07	2.54mm UNSH HEADER HORIZ SINLE ROW SMT		dwg no 10119333	rev E
linear 0.X ±0.3 0.XX ±0.13 0.XXX ±0.050	www.fci.com	cat. no.	Product - Customer Drw		sheet 1 of 1	
angular 0° ±2°						

Amphenol FCI

© 2020 Amphenol Corporation