


D

C

B

A

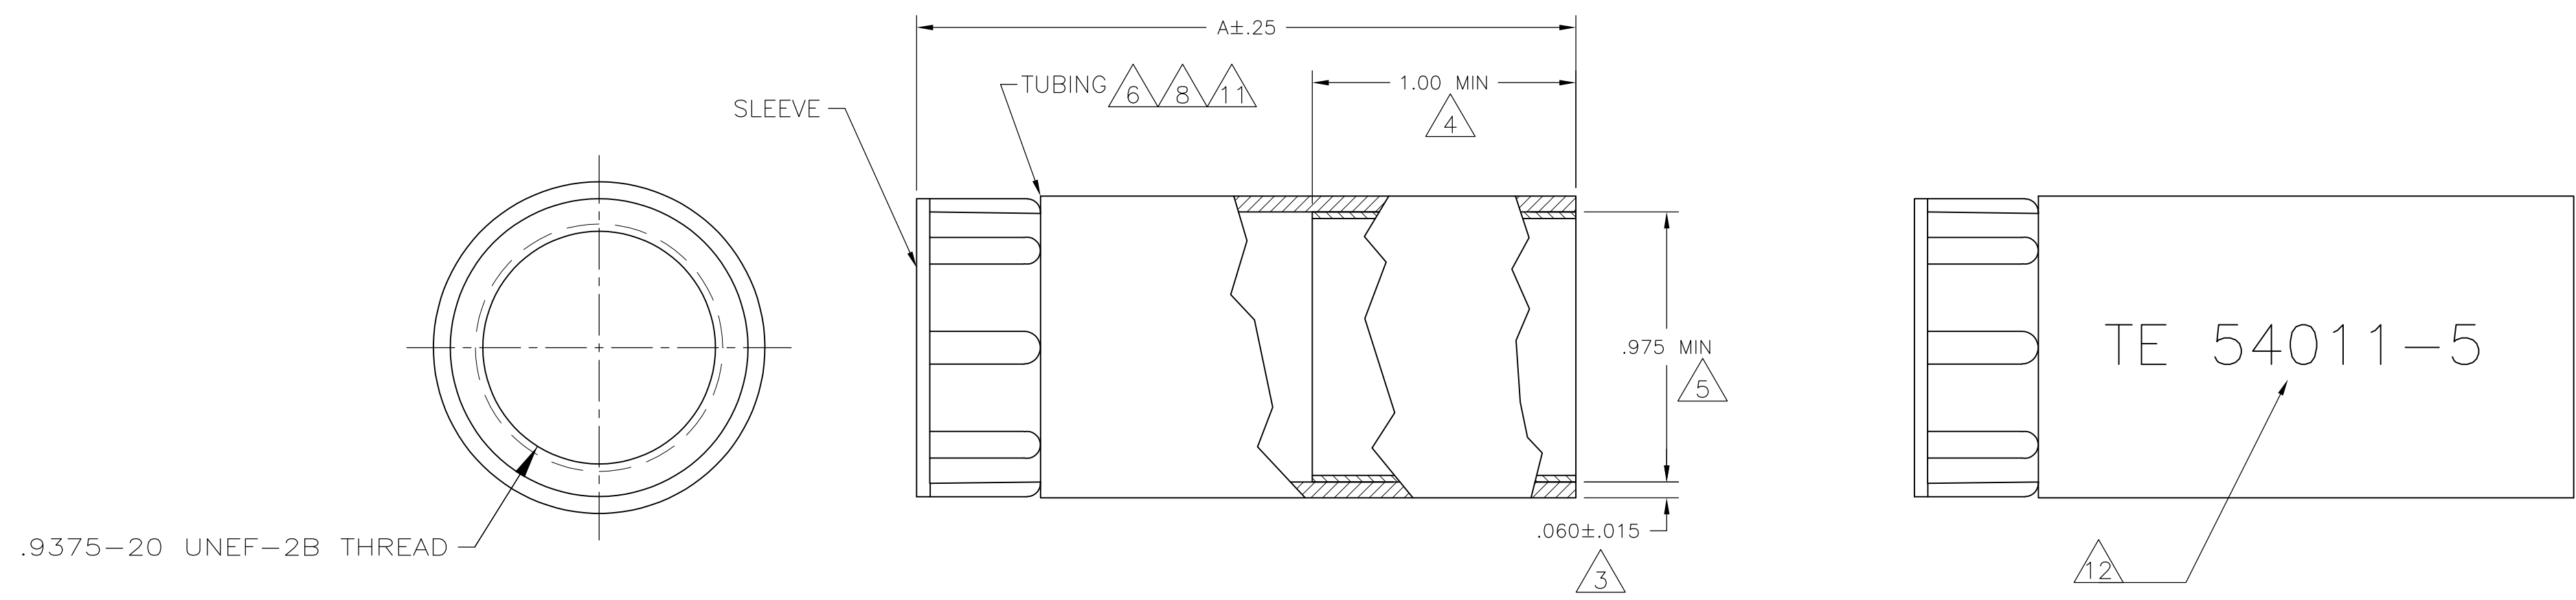

- 1

POLYOLEFIN, BLACK.
- 2

NYLON, BLACK.
- 3

NOMINAL WALL THICKNESS, EXPANDED.
- 4

LENGTH OF SEALANT.
- 5

EXPANDED INSIDE DIAMETER.
- 6

9.52[.375] MAXIMUM RECOVERED INSIDE DIAMETER.
- 7

ASSEMBLY WILL PASS 0.0703 KG PER SQ CENTIMETER [ONE POUND PER SQ IN.] WATER PRESSURE TEST.
- 8

121°C [250°F] SHRINK TEMPERATURE.
- 9

-55°C TO 110°C [-67°F TO 230°F] OPERATING TEMPERATURE.
- 10

THIS PART WILL ACCOMMODATE Ø10.16 - Ø22.22 [Ø400 - Ø.875] CABLE RANGE.
- 11

ACTUAL SHAPE MAY VARY DUE TO PROCESS VARIANCE.
- 12

SEE P/N CHART FOR MARKING. WHITE CHARACTERS .150 MIN HIGH AND LOCATED ON THE OUTSIDE SURFACE OF THE TUBING.
- 13


OBSOLETE PART.

54011

B

A

		TE 54011-5	2.50	13 54011-5
		NONE	4.00	54011-4
		NONE	3.25	54011-3
		NONE	2.50	54011-1
		MARKING	A	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.REIFSNYDER 10 APR 96	 TE Connectivity				
DIMENSIONS: INCHES		CHK R.STONE 15 APR 95					
	0 PLC	± -	APVD T.A.WETZEL 03 MAY 96	NAME STRAIN RELIEF ASSY, SHELL SIZE 17, CPC			
	1 PLC	± -	PRODUCT SPEC				
	2 PLC	± -	-				
	3 PLC	± -	APPLICATION SPEC				
	4 PLC	± -	-	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
MATERIAL	FINISH	WEIGHT	-	A2	00779	C=54011	-
TUBING: 1 SLEEVE: 2		CUSTOMER DRAWING			SCALE	SHEET	REV
					2:1	1 of 1	AC