



LEGEND ◆ = KEY PRODUCT CHARACTERISTICS

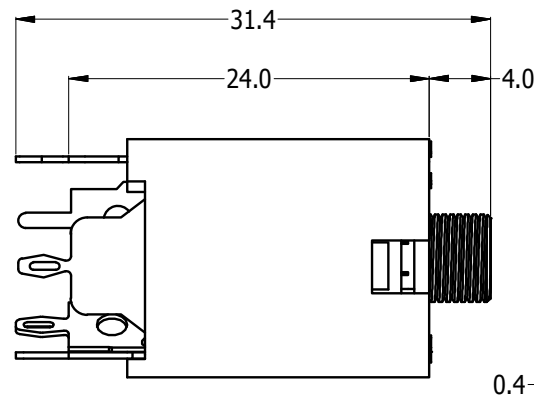




REVISION HISTORY

REV	DESCRIPTION	DATE	BY	CHG/No
0	FIRST ISSUE	30/10/08	M.H	8798
1	ADD PCB LAYOUT ACC TO PART No	20/01/16	T.N	9330




METAL WASHER 13.0 X 0.40mm THICK

M6 x 0.5 METAL NUT 2.0 mm THICK

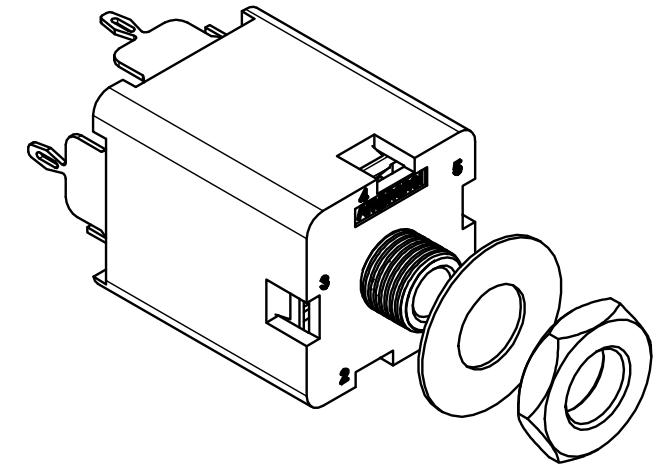

3D VIEW (2:1)



PANEL CUTOUT

PART NUMBER	ACJM-MV35-2	ACJM-MV35-2S	ACJS-MV35-3	ACJS-MV35-3S	ACJS-MV35-5
SCHEMATIC DIAGRAM					
PCB LAYOUT (CONNECTOR SIDE)					

NOTE: This connector is suitable for maximum 1.15mm panel thickness with Metal Washer & Nut

UNLESS OTHERWISE SPECIFIED TOLERANCE TO BE		THIS DOCUMENT IS THE PROPERTY OF AMPHENOL AUSTRALIA PTY. LTD. . NO PART THEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER				Amphenol Amphenol Australia Pty.Ltd, 22 Industry Boulevard, Carrum Downs, VIC 3201			
LINEAR	ANGULAR	MATERIAL: REFER TO COMPONENTS		DRN: B.Z	DATE: 25/04/08	TITLE: 3.5mm JACK VERTICAL CUSTOMER DRAWING		PART NO: SEE CHART	
X ±0.5 X.X ±.1 X.XX ±.05	X' ±1 X.X' ±.30' X.XX' ±.15'			CKD: M.H	DATE: 29/10/08				
BREAK ALL SHARP EDGES AND REMOVE ALL BURRS				APP'D: P.M	DATE: 29/10/08				
DO NOT SCALE		FINISH:	REFER TO COMPONENTS	APP'D: P.M	DATE: 29/10/08				
DIMENSIONS IN MILLIMETRES			SCALE: NTS	SIZE: A3	CAD FILE 55010544001110	DRAWING NO. 55010544-001-5		SHEET 1/1	