
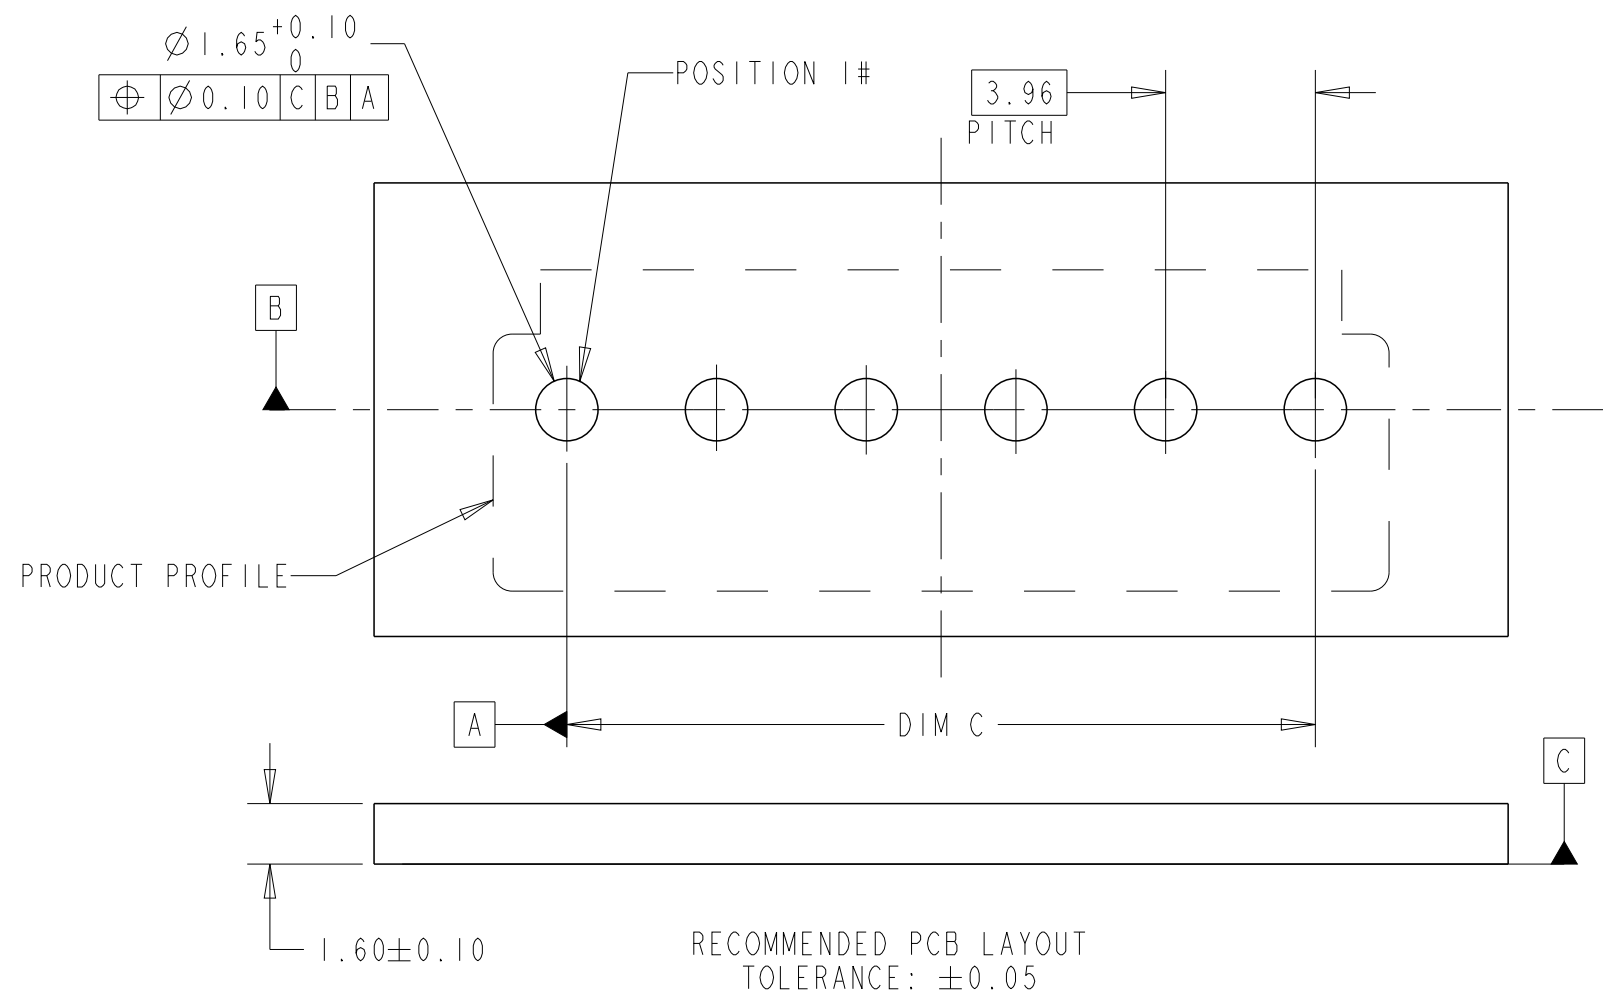
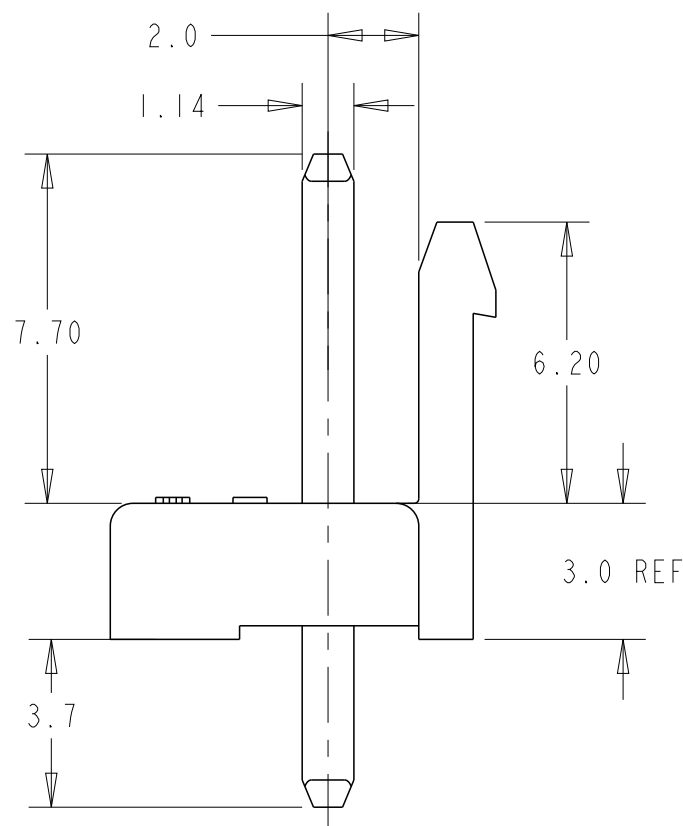
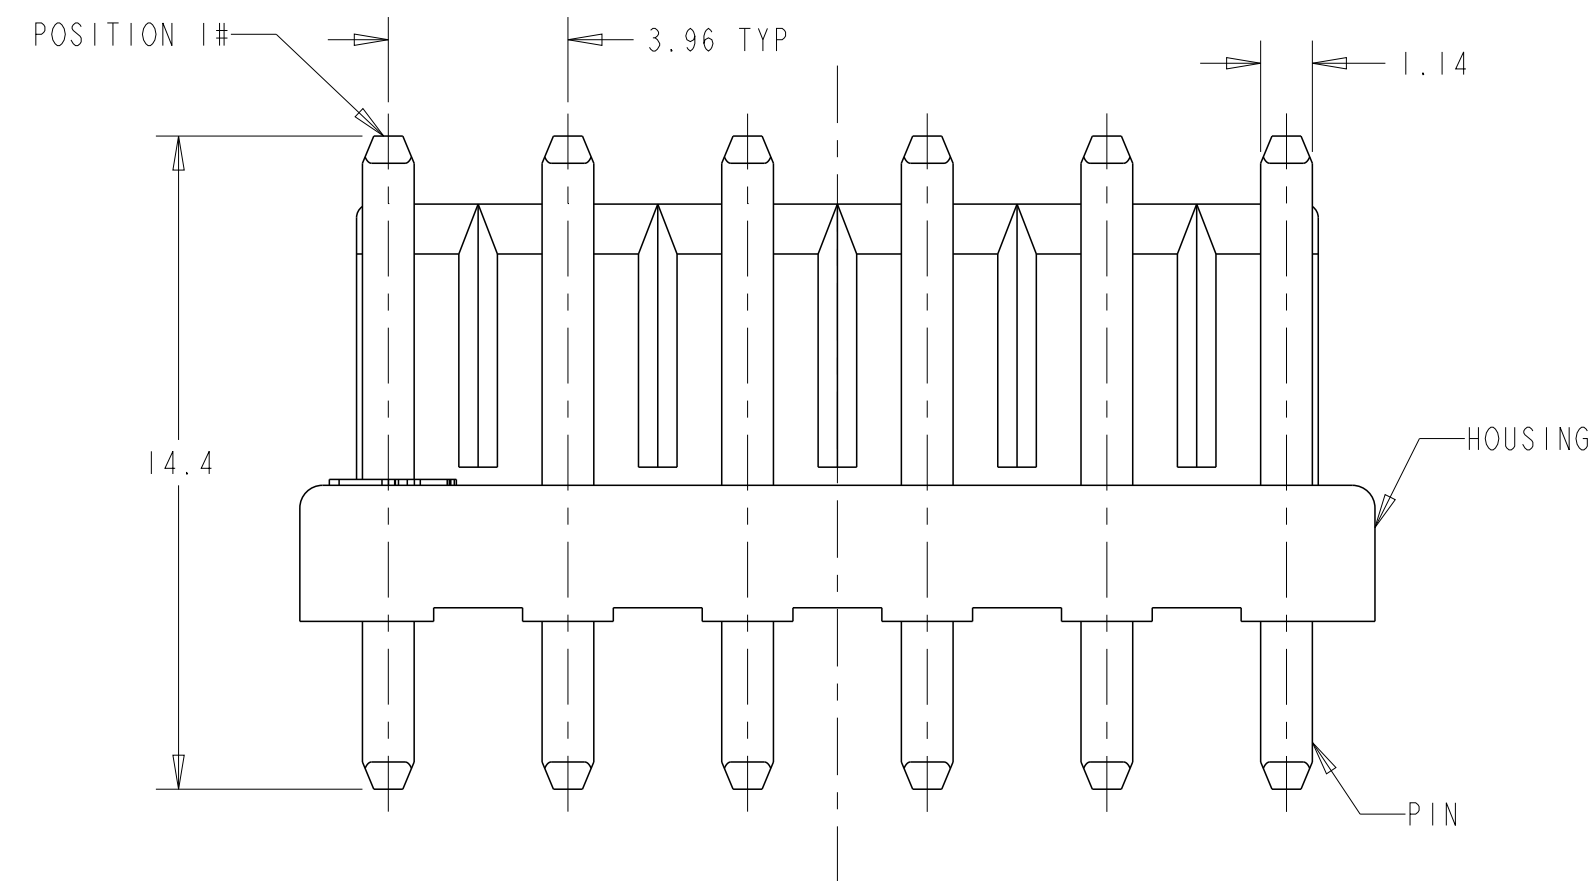


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	REVISED PER ECN-22-148353	07APR2022	WH	LC

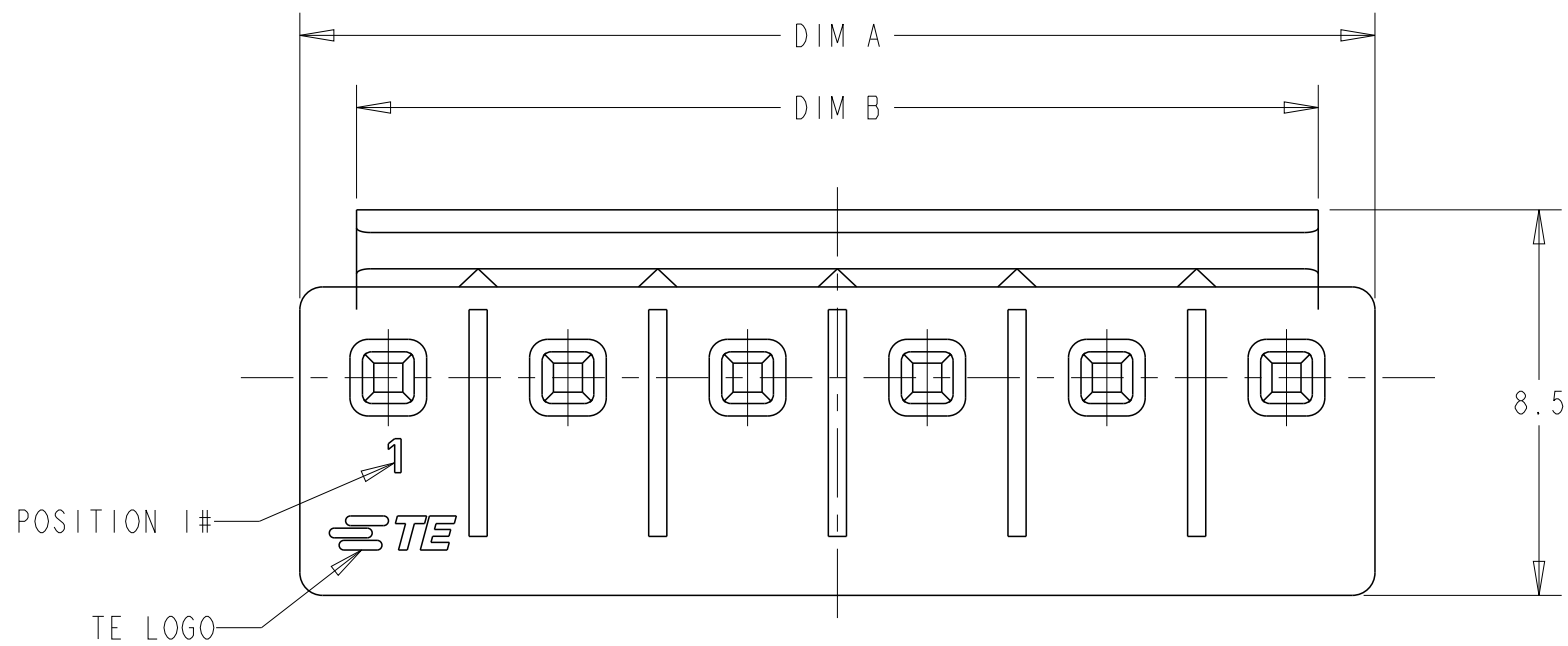

-  MATERIAL:
HOUSING: HIGH PERFORMANCE RESIN, UL94-V0 COLOR: NATURAL
PIN CONTACT: COPPER ALLOY, 2.0μm MIN TIN OVERALL

 2. DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION.
 3. RECOMMENDED MATING PART: []-2371377-[]
 4. PACKAGING: LOOSE PIECE
 5. PER IEC 60335-1 SECT. 30, GWEPT 750°C, NO FLAME OR $T_e - T_i \leq 2S$

39.60	41.00	43.50	11	1-2375239-1
35.64	37.04	39.54	10	1-2375239-0
31.68	33.08	35.58	9	2375239-9
27.72	29.12	31.62	8	2375239-8
23.76	25.16	27.66	7	2375239-7
19.80	21.20	23.70	6	2375239-6
15.84	17.24	19.74	5	2375239-5
11.88	13.28	15.78	4	2375239-4
7.92	9.32	11.82	3	2375239-3
3.96	5.36	7.86	2	2375239-2
DIMC	DIM B	DIM A	POSITION	PART NO.

2375239-6 SHOWN

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN W. HUO 04FEB2022 CHK L. CHEN 07FEB2022 APVD D. ZHANG 07FEB2022		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±0.5 2 PLC ±0.30 3 PLC ± 4 PLC ± ANGLES ±3° MATERIAL FINISH		NAME HEADER ASSEMBLY, UNSHROUDED GWT, VERTICAL, SINGLE ROW, EP3.96	
		PRODUCT SPEC 108-2297 APPLICATION SPEC 114-13265		SIZE CAGE CODE DRAWING NO RESTRICTED TO A2 00779 C=2375239 -	
				CUSTOMER DRAWING SCALE N/A SHEET 1 OF 1 REV A	