LOOSE PIECE		TAPE MOUNTED		SPECIFICATIONS						
MATERIAL NUMBER	ENGINEERING NUMBER	MATERIAL NUMBER	ENGINEERING NUMBER	STUD SIZE	"S" ±.005 [0.13]	"W" ±.010 [0.25]	"C" MIN.	"L" MAX.	"D" ±.005 [0.13]	"H"
190990048	C-2718-08X	190990049	C-2718-08XT	8	.173 [4.39]	.310 [7.87]	.261 [6.63]	1.016 [25.81]	.139 [3.53]	.980 [24.89]
190990050	C-2719-10X	190990051	C-2719-10XT	10	.198 [5.03]	.330 [8.38]	.261 [6.63]	1.064 [27.03]	.156 [3.96]	.980 [24.89]

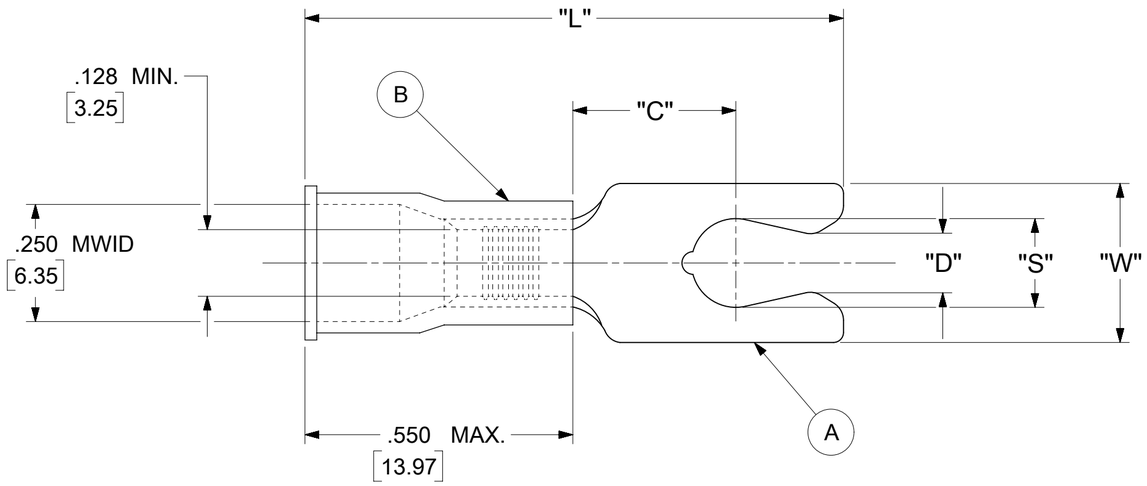

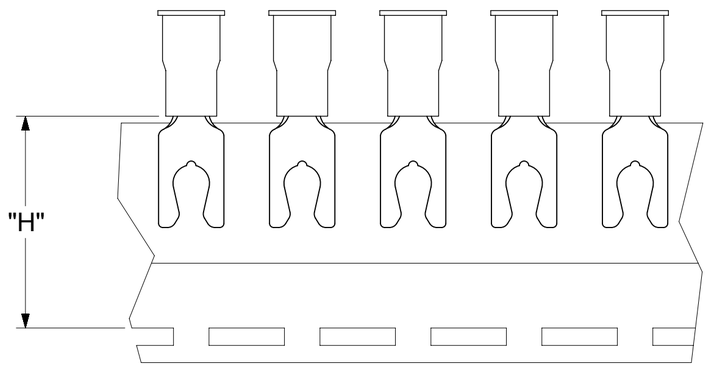

PARTS ON TAPE

NOTES:

1. MATERIAL:
   (A). TERMINAL: COPPER (STOCK THICKNESS .040±.001 [1.02])
   PLATING: ELECTRO-TIN (.0003 MIN.)
   (B). INSULATION: MOLDED PVC (YELLOW)
2. MWID: MAXIMUM WIRE INSULATION DIAMETER
3. WIRE SIZE: 12 -10 AWG
   4.0 -6.0 MM^2
4. "UL" LISTING #E32244
   "CSA" LISTING #18689
5. ALL DIMENSIONS IN INCHES/[MM].
6. PARTS ARE ROHS COMPLIANT.
7. DIMS. SHOWN ARE FOR REFERENCE ONLY.

DOCUMENT STATUS	P1	RELEASE DATE	2019/08/05 20:30:07

SYMBOLS: = 0 (A) = 0 (C) = 0 (F) = 0 (S) = 0 = 0 (C) = 0 = 0 = 0 = 0

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS: INCH/MM
SCALE: NTS

GENERAL TOLERANCES (UNLESS SPECIFIED)

	MM	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .005
2 PLACES	± 0.13	± .01
1 PLACE	± 0.25	± ---
0 PLACES	± ---	± ---
ANGULAR TOL	± 0.5 °	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC: MIGRATION TO ECTR/NX

EC NO: 620958
DRWN: ABENJAMINLW 2019/07/17
CHK'D: GROJAS01 2019/07/19
APPR: JMACNEIL 2019/08/05

INITIAL REVISION:
DRWN: GZ 1985/04/05
APPR: JMACNEIL 2019/08/05

THIRD ANGLE PROJECTION | DRAWING: C-SIZE | SERIES: 19099

molex

SNAP SPADE SHORT
TONGUE TERMINAL INSULKRIMP SERIES

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
190990048	PSD	000	A

MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
SEE TABLE	GENERAL MARKET	1 OF 1

FORMAT: Eng-lega-master-tb-prod-C
REVISION: D
DATE: 2018/01/18