

6		5		4	
ITEM	PART#	DESCRIPTION		QTY	UOM
A, B	22013107	100 KK Term Hsg W/LRamp W/PoR 10Ckt		2	PC
C	8500113	KK 100 Crp Term Std 22-30 Awg Tin		20	PC
D	--	PAPER PRINTED PAPER WHITE		1	PC

2		1	
FROM	TO	DESCRIPTION	COLOR
A1	B10	1X22AWG DISC MPPE BK UL11028	BLACK
A2	B9	1X22AWG DISC MPPE BK UL11028	BLACK
A3	B8	1X22AWG DISC MPPE BK UL11028	BLACK
A4	B7	1X22AWG DISC MPPE BK UL11028	BLACK
A5	B6	1X22AWG DISC MPPE BK UL11028	BLACK
A6	B5	1X22AWG DISC MPPE BK UL11028	BLACK
A7	B4	1X22AWG DISC MPPE BK UL11028	BLACK
A8	B3	1X22AWG DISC MPPE BK UL11028	BLACK
A9	B2	1X22AWG DISC MPPE BK UL11028	BLACK
A10	B1	1X22AWG DISC MPPE BK UL11028	BLACK

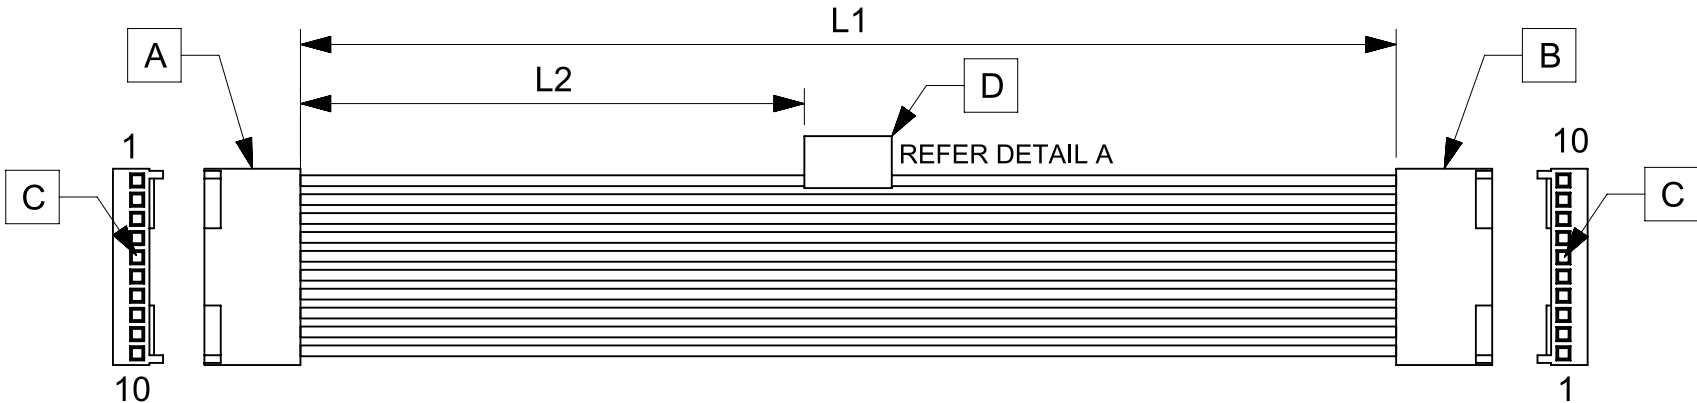


TABLE			
PART NUMBER	L1	L2	TITLE
2177961101	150±8	63 REF	KK 2.54 SR R-R 10CKT 150MM DISC Sn
2177961102	300±10	138 REF	KK 2.54 SR R-R 10CKT 300MM DISC Sn
2177961103	600±10	288 REF	KK 2.54 SR R-R 10CKT 600MM DISC Sn

NOTES

1. Cable assembly must pass 100% for continuity and polarity.
2. Connector view shown is from mating side.
3. Label text must be 2mm max. in height with Arial font.
4. Label must be wrapped in Flag type on a single cable.

REVISION			
DATE	REV	DESCRIPTION	CHANGER
11/01/2021	A	INITIAL RELEASE	ARAJU

MOLEX P/N
MOLEX
BATCH WK/YR
DETAIL A

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		molex			
	DIMENSION UNITS	SCALE						
$\frac{F}{A} = 0$	mm	NTS						
$\frac{F}{E} = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)							
$\frac{F}{P} = 0$	ANGULAR TOL ± °							
DIVISIONAL SYMBOLS	4 PLACES	±						
	3 PLACES	±						
	2 PLACES	±						
	1 PLACE	±						
	0 PLACES	±						
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER	
			A4-SIZE	217796	SEE TABLE	GENERAL MARKET	1 OF 1	

DOCUMENT STATUS	P1	RELEASE DATE	2021/01/11	10:46:54
-----------------	----	--------------	------------	----------