

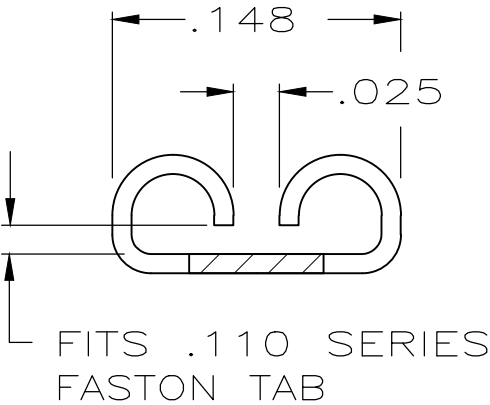
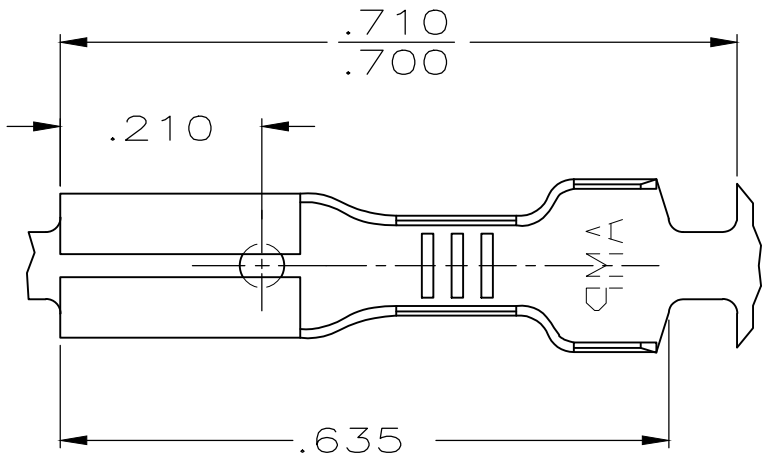



- 1 CONTINUOUS STRIP ON REELS.
- 2 MATING TAB THK IS .012±.001.
- 3 WIRE SIZE IS #22-#18 AWG.
- 4 INSULATION RANGE IS .060-.100 DIA
- 5 REELED ON PLASTIC REELS.
- 6 PLATING THICKNESS: .00023 INCH MIN
- 7 SAME AS -1 BUT WITH PAPER INTERLEAVE.

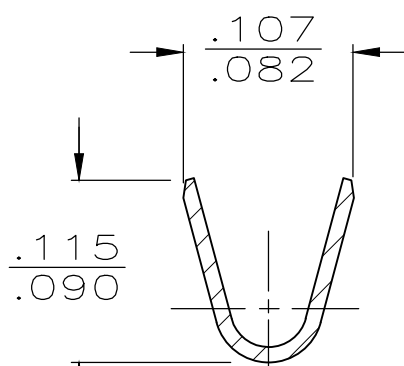

VIEW A-A

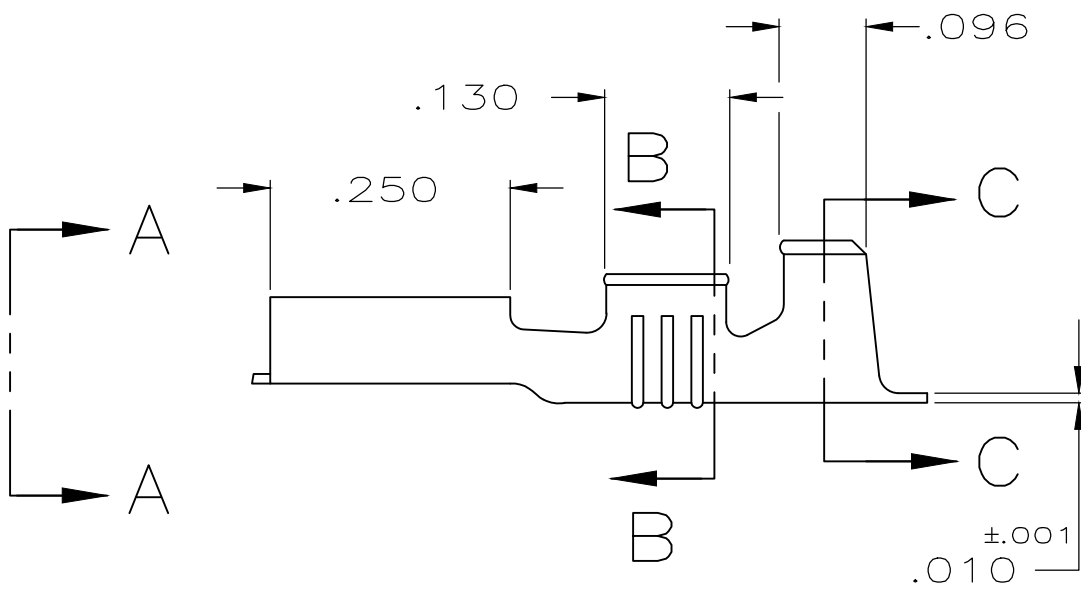

SECTION B-B

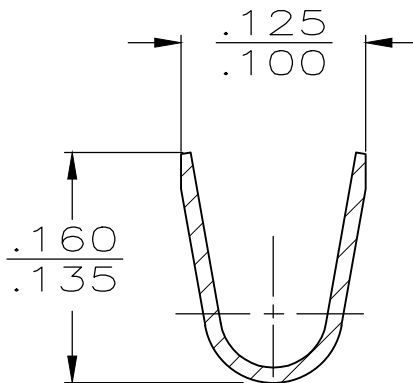


SECTION C-C

TIN PLATING	BRASS	60415-6	7
NICKEL PLATING	BRASS	60415-5	
—	BRASS	60415-4	
TIN PLATING	BRASS	60415-2	5
TIN PLATING	BRASS	60415-1	
FINISH	MATERIAL	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES



TOLERANCES UNLESS
OTHERWISE SPECIFIED:

- 0 PLC ± -
- 1 PLC ± -
- 2 PLC ± -
- 3 PLC ± .015
- 4 PLC ± -
- ANGLES ± -

MATERIAL

BRASS

FINISH

PRE-TIN

DWN JR RUTH 6/23/87

CHK G YETTER 6/23/87

APVD C MEYERS 6/23/87

PRODUCT SPEC

—

APPLICATION SPEC

—

WEIGHT 0.244

CUSTOMER DRAWING



TE Connectivity

NAME
RECEPTACLE, FASTON,™
.110 SERIES

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-60415	—

SCALE	SHEET	REV
5:1	1 OF 1	AS3