

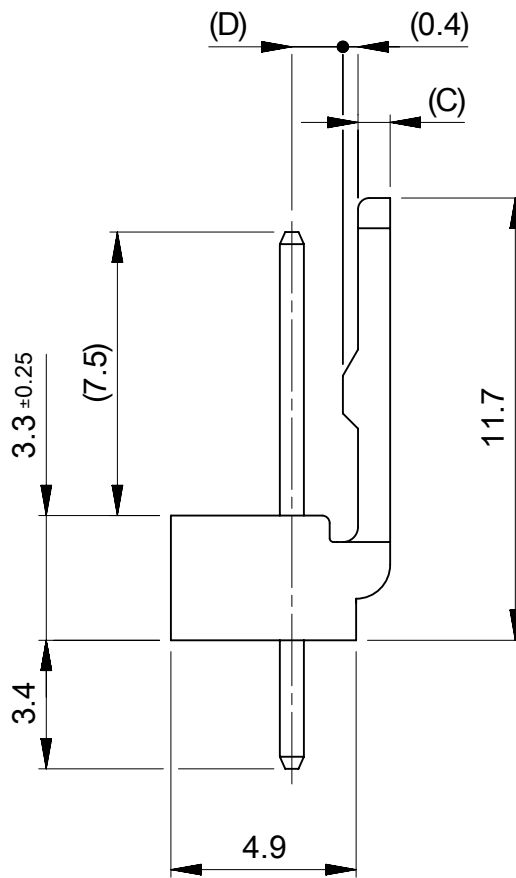
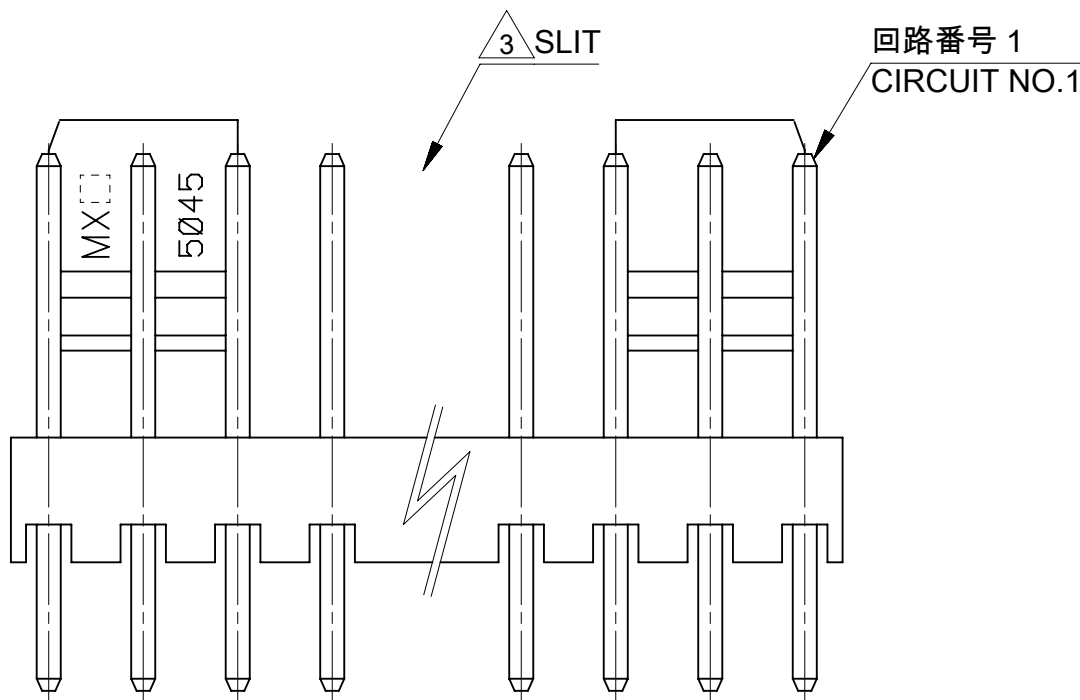


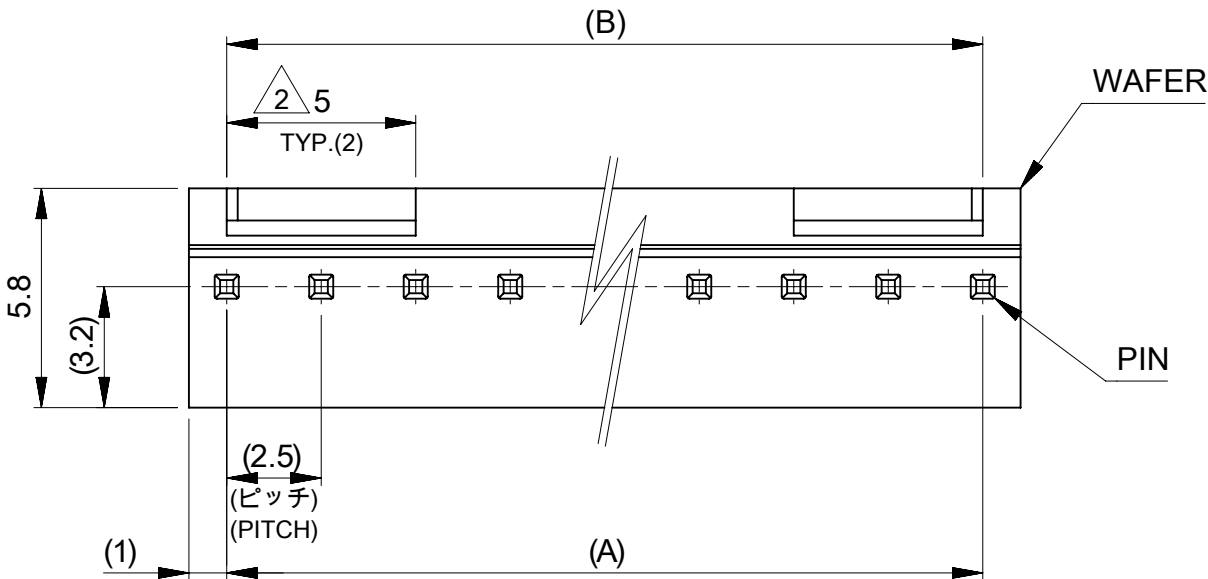


- 注記
NOTES:
- 材料(MATERIAL)
ウェハー : ポリアミド, UL94V-0 (色: アイボリー)
WAFER: POLYAMIDE, UL94V-0 (COLOR: IVORY)
ピン: □0.635 黄銅、ニッケル下地金めっき
PIN: □0.635 BRASS, GOLD OVER NICKEL PLATING
 - 6極以上に適合。
TO BE APPLIED FOR 6 CKT. AND ABOVE.
 - 5極以下はロック部スリットなし。
NO SLIT IS PROVIDED FOR 5 CKT.AND LESS THAN 5 CKT.

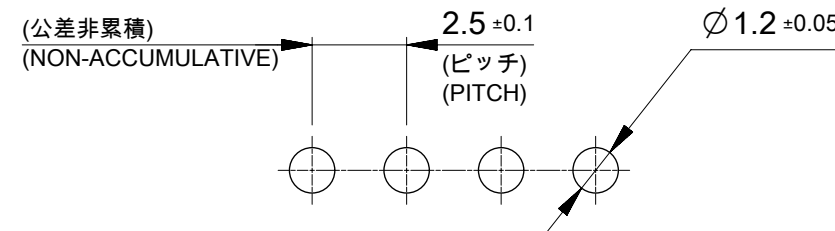

基板取付穴推奨寸法
RECOMMENDED P.C. BOARD HOLE DIM.

1.35	0.85	22.5	22.5	22111101	5045-10AG	10
1.35	0.85	20	20	22111091	5045-09AG	9
1.35	0.85	17.5	17.5	22111081	5045-08AG	8
1.35	0.85	15	15	22111071	5045-07AG	7
1.35	0.85	12.5	12.5	22111061	5045-06AG	6
1.35	0.85	10	10	22111051	5045-05AG	5
1.35	0.85	7.5	7.5	22111041	5045-04AG	4
1.2	1	5	5	22111031	5045-03AG	3
1.2	1	2.5	2.5	22111021	5045-02AG	2
(D)	(C)	(B)	(A)	ORDER NO.	ENG. NO.	CKT.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
DIMENSION UNITS		SCALE		CURRENT REV DESC: REVISED			molex					
mm		5:1										
GENERAL TOLERANCES (UNLESS SPECIFIED)							MINI-LATCH 2.5 HEADER ASSEMBLY VT WITH LOCK GOLD PLATING					
ANGULAR TOL ± 3.0 °												
4 PLACES		± 0.4		EC NO: 758980 DRWN: HHUSSIN 2023/07/19 CHK'D: SAKIYAMA 2024/03/13 APPR: AIDA 2024/03/14			PRODUCT CUSTOMER DRAWING					
3 PLACES		± 0.4										
2 PLACES		± 0.4										
1 PLACE		± 0.4		INITIAL REVISION: DRWN: RHORI 2013/11/25 APPR: NUKITA 2013/11/28			DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION	
0 PLACES		± 0.4					SD-5045-001		PSD	001	H	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER		CUSTOMER		SHEET NUMBER
				A3-SIZE		5045		SEE CHART		GENERAL MARKET		1 OF 1