

NOTES:

1. SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 125V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 100MΩ Min.

Withstanding Voltage: 500V AC/minute

Material: Natural Thermoplastic,UL94V-0

2. Part number of terminal for wire assembly: 10114827

3. Mate With Header: AFCI 10114830 & 10114828 & 10114831 & 10114829

4. Ordering Information & Dimensions:

10114826- X 0 X XX LF

LF: See note A

Pin counts from 02~15

Packaging:

0: Bulk


Material:

0: PA66 Natural

1: PA66 Black

2: PA66 Yellow

3: PA66 Natural Glow Wire Compatible

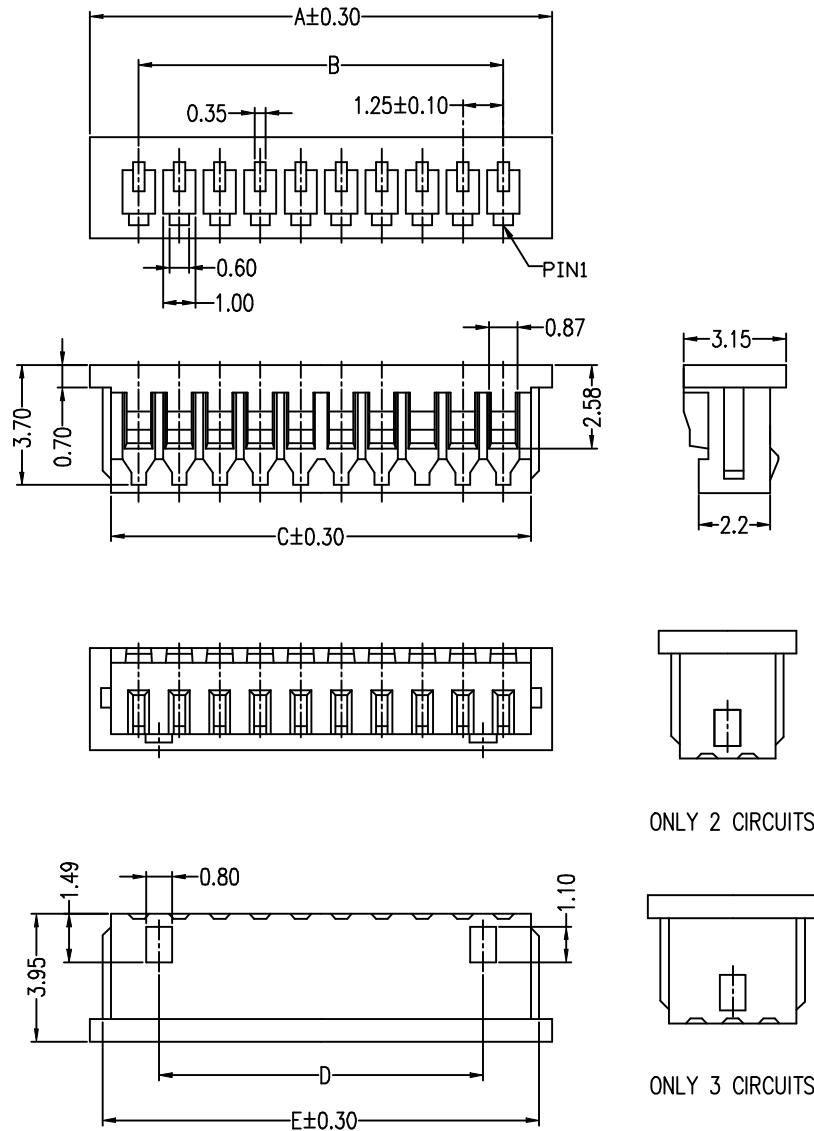

PART NO.	Dimensions				
	A	B	C	D	E
10114826-x0x02LF	4.25	1.25 ± 0.05	2.95		3.47
10114826-x0x03LF	5.50	2.50 ± 0.10	4.20		4.72
10114826-x0x04LF	6.75	3.75 ± 0.10	5.45	2.50 ± 0.10	5.97
10114826-x0x05LF	8.00	5.00 ± 0.10	6.70	3.75 ± 0.10	7.22
10114826-x0x06LF	9.25	6.25 ± 0.15	7.95	5.00 ± 0.15	8.47
10114826-x0x07LF	10.50	7.50 ± 0.15	9.20	6.25 ± 0.15	9.72
10114826-x0x08LF	11.75	8.75 ± 0.15	10.45	7.50 ± 0.15	10.97
10114826-x0x09LF	13.00	10.00 ± 0.15	11.70	8.75 ± 0.15	12.22
10114826-x0x10LF	14.25	11.25 ± 0.20	12.95	10.00 ± 0.20	13.47
10114826-x0x11LF	15.50	12.50 ± 0.20	14.20	11.25 ± 0.20	14.72
10114826-x0x12LF	16.75	13.75 ± 0.20	15.45	12.50 ± 0.20	15.97
10114826-x0x13LF	18.00	15.00 ± 0.20	16.70	13.75 ± 0.20	17.22
10114826-x0x14LF	19.25	16.25 ± 0.20	17.95	15.00 ± 0.20	18.47
10114826-x0x15LF	20.50	17.50 ± 0.20	19.20	16.25 ± 0.20	19.72

mat'l. code				surface	tolerance	projection	product family		
				ISO 1302	ISO 406	ISO 1101	FitMate		
ltr	ec'n no	dr	date	tolerances unless otherwise specified			title		
A	T10-0145	JH	12/1/10	angles	linear		WTB 1.25MM HOUSING		
B	ELX-N-23435	TIM	03/02/16						
C	ELX-N-26408	TONY	03/17/17	$0 \pm 2^\circ$					
D	ELX-N-27088	TONY	05/24/17	dr	JASON HSU	12/1/10	dwg no		
E	ELX-N-30250	TONY	05/23/18	eng	Jason Wang	8/18/21	sheet1 of 1		
F	ELX-N-42077	Jason	08/18/21	chr	-	-	10114826		
				appd	Tim Yao	8/18/21	type Product Customer Drawing		
sheet	revision	F							
index	sheet	1							