


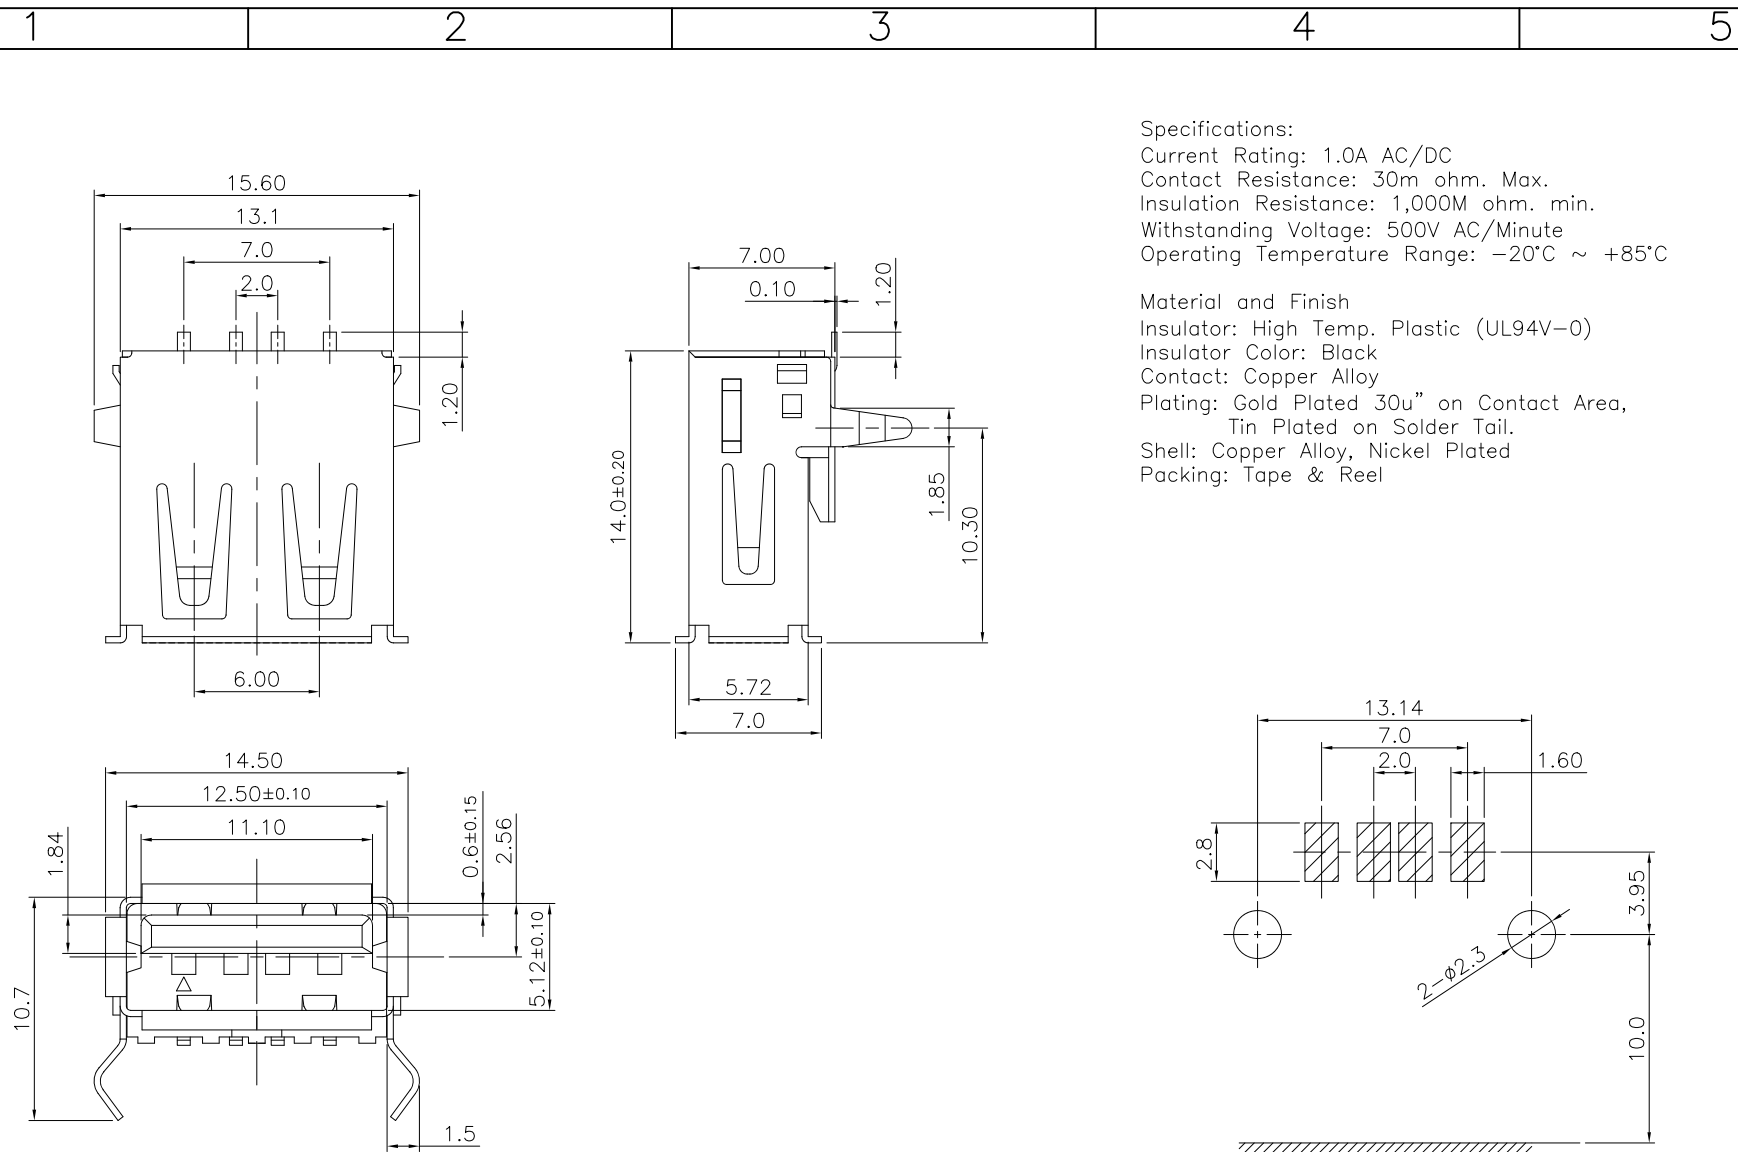

Specifications:
 Current Rating: 1.0A AC/DC
 Contact Resistance: 30m ohm. Max.
 Insulation Resistance: 1,000M ohm. min.
 Withstanding Voltage: 500V AC/Minute
 Operating Temperature Range: -20°C ~ +85°C

Material and Finish
 Insulator: High Temp. Plastic (UL94V-0)
 Insulator Color: Black
 Contact: Copper Alloy
 Plating: Gold Plated 30u" on Contact Area,
 Tin Plated on Solder Tail.
 Shell: Copper Alloy, Nickel Plated
 Packing: Tape & Reel

Recommended P.C.B. Layout

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE:	CnC Tech Industrial Cable and Connector Technology		D
				Lucy	.X=±0.30 .XX=±0.20			
				CHECKED:	UNIT: MM	DESCRIPTION: USB A Type SMD W/ Kink Type Socket	SIZE A4	
				Jerry	SCALE: 1:1			
A	15-JAN-2026			APPROVAL:	SHEET: 1/1	PART NO: 1002-002-01100-TR		
REV	DATE	FILE	BY	Rory	PROJECTION: 			