

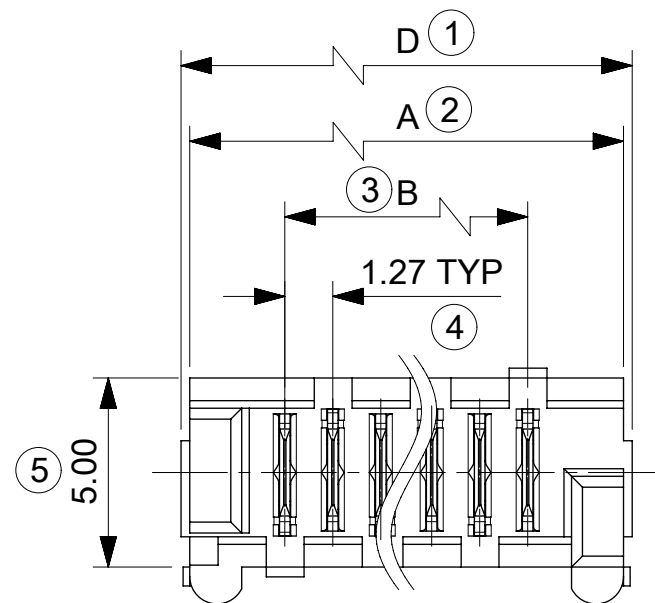
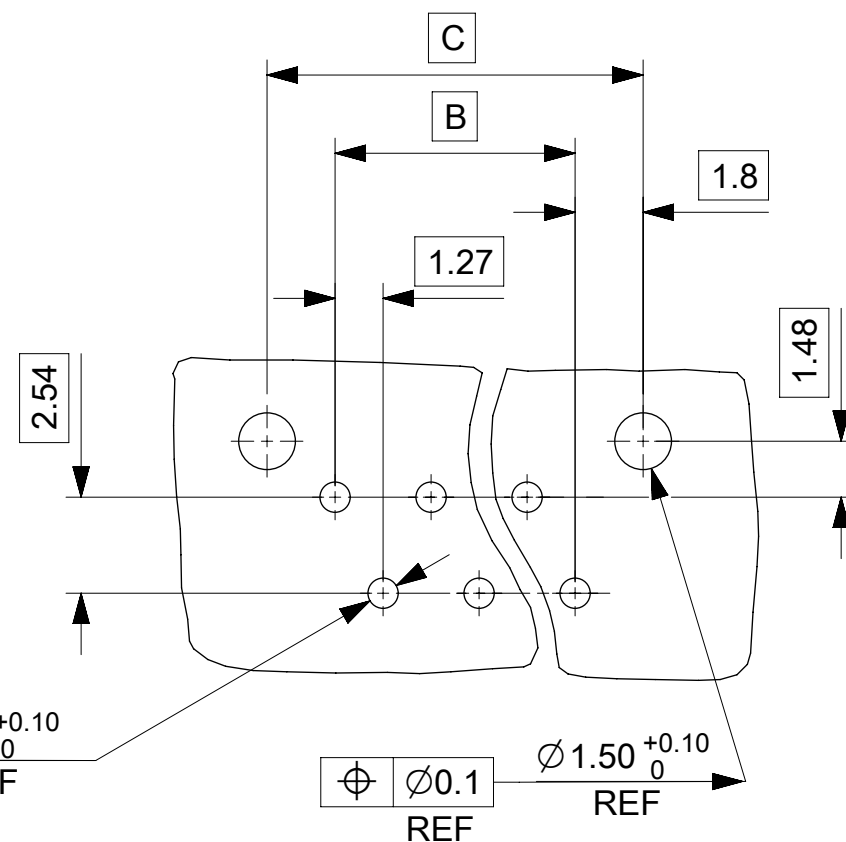



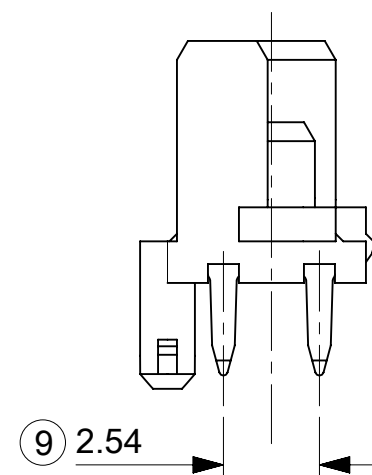

0 = 4-6 μ m TIN ASSY —
3 = 0.76 μ m GOLD ASSY
7 = 0.76 μ m GOLD ASSY, TUBED
9 = 4-6 μ m TIN ASSY TUBED

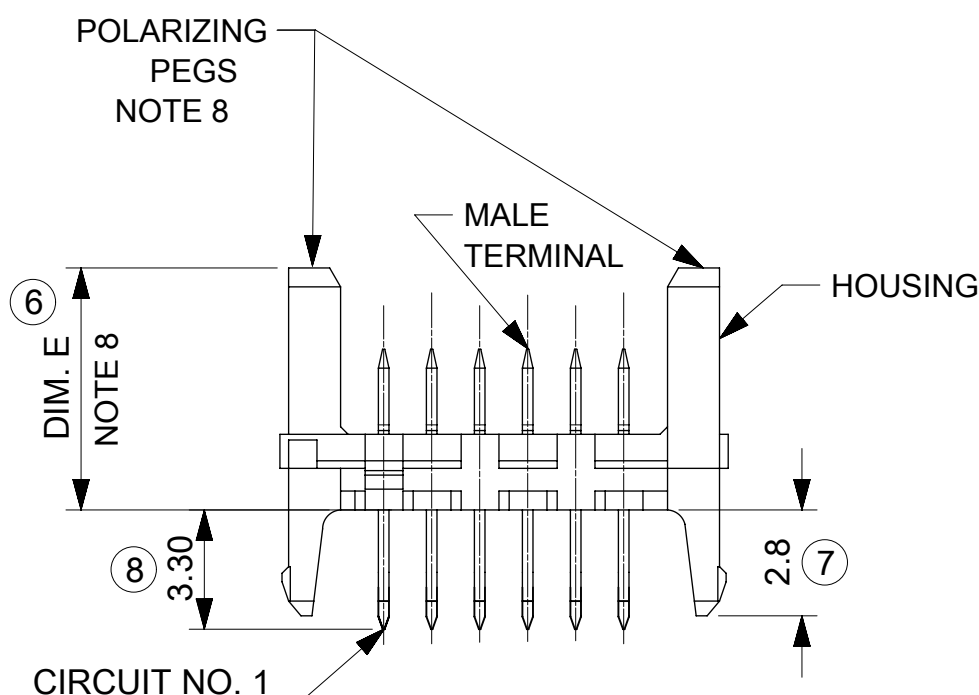

- NOTES:**
- 1. HOUSING. NYLON 46, GLASS FILLED UL 94 V-0, NATURAL (WHITE).**
 - 2. TERMINAL: BRASS**
PLATING TIN: 1.27 MICROMETRE MIN. NICKEL
UNDER 4-6 MICROMETRE TIN
PLATING GOLD : UNDERPLATED 1.27µm MIN NICKEL
3-5µm TIN SELECTIVE
0.76µm MIN. SELECTIVE GOLD
 - 3. APPLICATION CLASS TO DIN 40040 HME (-25°C/+100°C)**
 - 4. PIN PUSH FORCE 7N**
 - 5. TEST VOLTAGE: 750V.A.C./1 MIN**
 - 6. COMPATIBLE WITH MOLEX PART 90327**
 - 7. PRODUCT SPECIFICATION: PS-99020-0011**
 - 8. POLARISING PEG AVAILABLE IN 2 OPTIONS**
DIM E: STANDARD 6.40mm
DIM E: SHORT VERSION 4.10mm
 - 9. PACKAGING SPECIFICATION: PK-90325-002**

LAST INSPECTION NUMBER USED: 9

DOCUMENT STATUS	P1	RELEASE DATE	2023/02/20	05:04:38
-----------------	----	--------------	------------	----------

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
	DIMENSION UNITS		SCALE		CURRENT REV DESC: CAD MIGRATION			molex		
	mm		5:1							
	GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 738955 DRWN: GOWTHP 2023/02/02 CHK'D: GOWTHP 2023/02/16 APPR: ISHWARG 2023/02/20			HEADER ASSEMBLY		
	ANGULAR TOL ± °									
	4 PLACES		±		PRODUCT CUSTOMER DRAWING					
	3 PLACES		± 0.2							
	2 PLACES		± 0.2		DOCUMENT NUMBER SDA-90779			DOC TYPE	DOC PART	REVISION
	1 PLACE		±					PSD	001	T2
	0 PLACES		±		MATERIAL NUMBER SEE CHART			CUSTOMER GENERAL MARKET		SHEET NUMBER 1 OF 1
DIVISIONAL SYMBOLS										
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING A3-SIZE	SERIES 90779			