




TE Internal #: 292303-6

A, 2.0, Standard Profile, Receptacle, 1 Port, Top, Right Angle, Box & Tray / Tube, Flush, Through Hole - Solder, Cable-to-Board, USB Connectors

[View on TE.com >](#)

Connectors > Audio & Video Connectors > USB Connectors

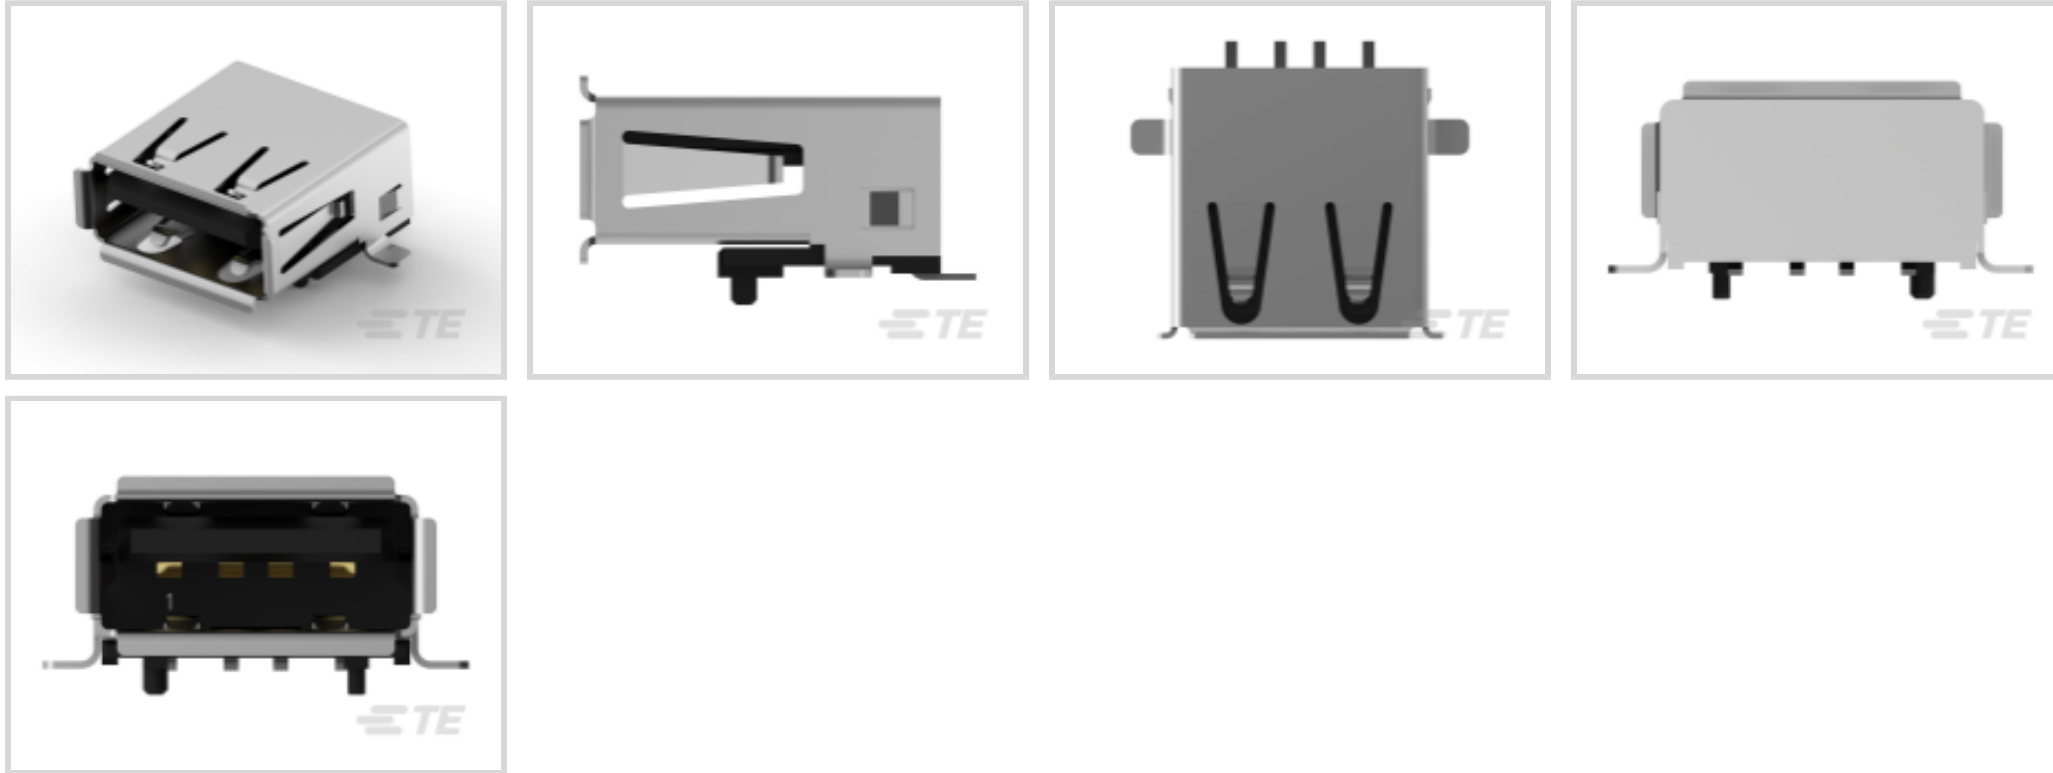

USB Adapter Type: **A**

USB Version: **2.0**

Connector Profile: **Standard**

Connector & Housing Type: **Receptacle**

Number of Ports: **1**

Features

Product Type Features

USB Adapter Type	A
USB Version	2.0
Connector & Housing Type	Receptacle
Connector System	Cable-to-Board
Connector & Contact Terminates To	Printed Circuit Board
USB Connector Type	USB 2.0 Type-A

Body Features

Connector Profile	Standard
Shell Plating Finish	Bright
Shell Plating Material	Tin

Configuration Features

Number of Ports	1
Number of Positions	4
Number of Mounting Legs	2



Mechanical Attachment

PCB Mount Location	Top
PCB Connector Seating	Flush
PCB Mount Retention Type	Kinked Legs
Panel Mount Feature Type	Flange
Connector Mounting Type	Board Mount
Locking Feature	With

Housing Features

Body Orientation	Right Angle
Centerline (Pitch)	2 mm, 2.5 mm[.098 in][.078 in]
Housing Color	Black
Housing Material	Thermoplastic

Packaging Features

Packaging Method	Tube, Box & Tray
Packaging Quantity	30

Termination Features

Termination Method to PCB	Through Hole - Solder
Termination Post & Tail Length	2.29 mm[.09 in]

Usage Conditions

Soldering Temperature (Max)	260 °C[500 °F]
Mating Cycles (Max)	1500
Operating Temperature Range	-55 – 85 °C[-67 – 185 °F]

Contact Features

Contact Current Rating (Max)	1 A
Contact Mating Area Plating Material Thickness	.76 µm[29.92 µin]
Contact Mating Area Plating Material	Gold or Gold Flash over Palladium Nickel

Operation/Application

Circuit Application	Power & Signal
Halogen Free	No

Other

EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant



Dimensions

PCB Thickness (Recommended)	1.57 mm[.062 in]
-----------------------------	------------------

Industry Standards

Industry Standard	USB 2.0
Moisture Sensitivity Level	1
UL Flammability Rating	UL 94V-0

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)













EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer





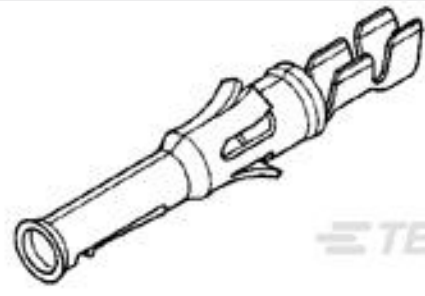
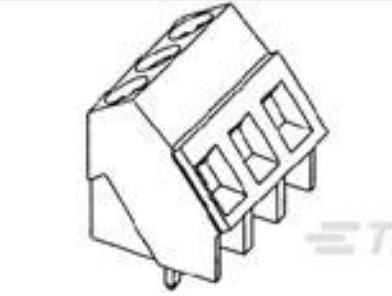
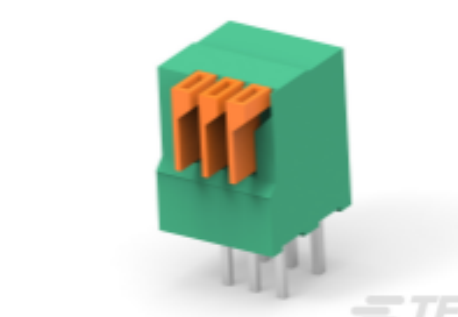

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



 <p>TE Part # 1827525-1 MECHATROLINK II CONNECTOR KIT</p>	 <p>TE Part # 1-1734028-1 Std USB, Type A, Plug, Natural</p>	 <p>TE Part # 1487599-1 USB, A-BLUNT,28/28,BLK,0.83M</p>	 <p>TE Part # 1734028-1 Std USB Type A, Plug, Natural</p>
 <p>TE Part # 1487593-1 USB, A-BLUNT,28/24,WHT,2.0M</p>	 <p>TE Part # 1-1734028-3 Std USB, Type A, Plug</p>	 <p>TE Part # 1496476-1 STD USB-A TO MINI-B ASSY, 1M</p>	 <p>TE Part # 1487600-1 USB, A-BLUNT,28/26,BLK,1.0M</p>
 <p>TE Part # 1487591-1 USB, A-BLUNT,28/28,WHT,0.83M</p>	 <p>TE Part # 1487593-2 USB, A-BLUNT,28/24,WHT,1.5M</p>	 <p>TE Part # 1929690-1 USB CABLE, USB A to Mini USB,Blue</p>	 <p>TE Part # 2142872-1 cable assy, usb a plug to 5p hsg</p>

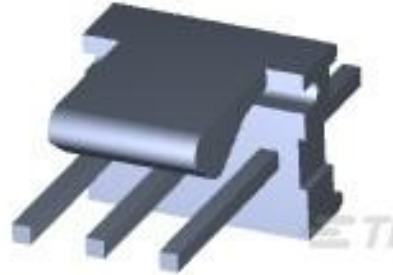Customers Also Bought

 <p>TE Part #3-641215-3 03P MTA100 HDR ASSY FL/ST 30AU</p>	 <p>TE Part #206838-2 RECEPT,SZ 23,CPC</p>	 <p>TE Part #1734037-4 Champ 050 series,40pos,Au over PdNi</p>	 <p>TE Part #1734100-4 Champ050 series,40pos,Au over PdNi</p>
 <p>TE Part #66594-4 TYPE VI SKT,MULTI-MATE,L.P.</p>	 <p>TE Part #796689-3 TERMI-BLOK PCB MOUNT 3P.</p>	 <p>TE Part #1-2834015-3 3POS 2.54MM TES CONN.</p>	 <p>TE Part #6-534206-4 28 MODII VRT DR CE 100/115</p>

Documents



Product Drawings

Std USB Type A, R/A, T/H

English

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_292303-6_F.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_292303-6_F.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_292303-6_F.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English