

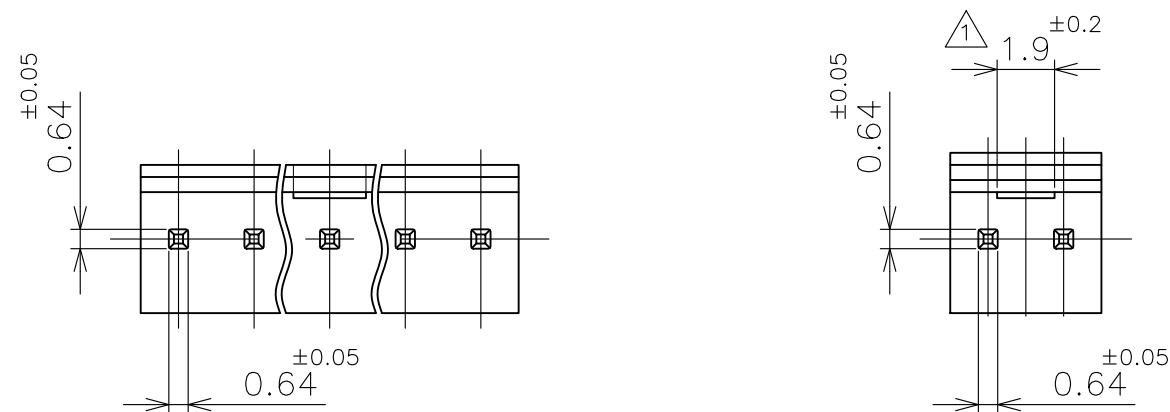


REVISIONS 変更					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	Y4	REVISED (ECR-22-158621)	30MAR2023	C.K	H.L

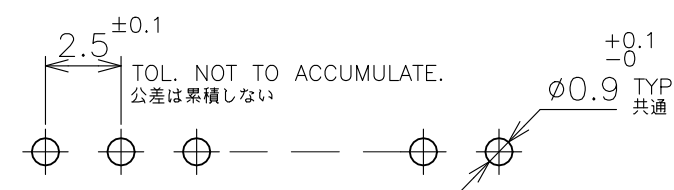

① LOCKING HOLE IS PLACED ON THE CENTER OF POST HEADER.
② OBSOLETE 11POS,13POS,15POS PARTS.
OBSOLETE RED AND GREEN COLOR PARTS.

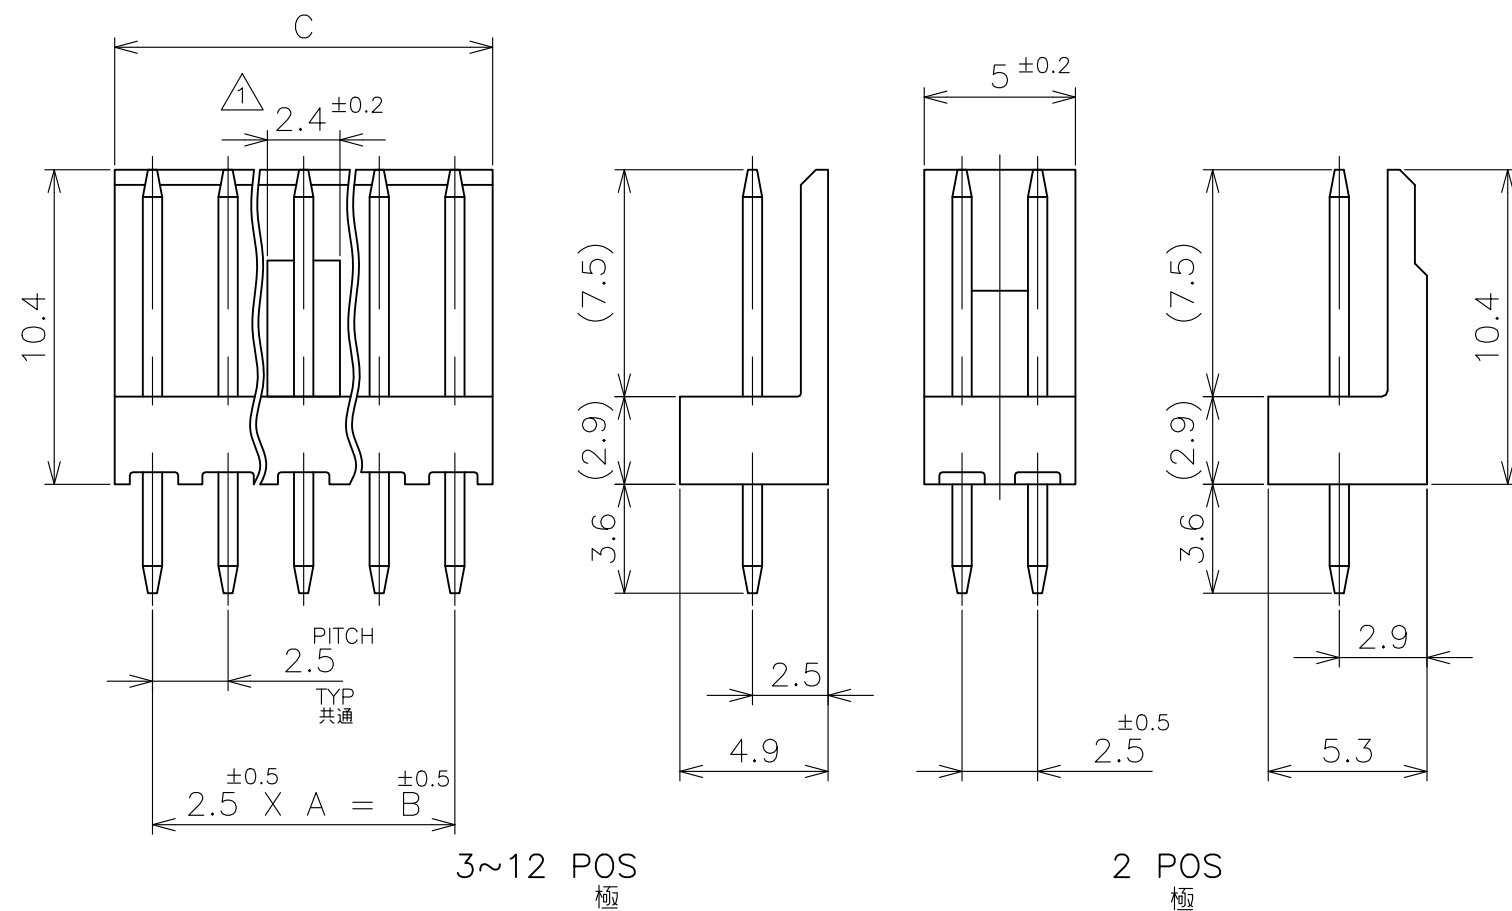

RECOMMENDED BOARD LAYOUT (1.6 THK)
取付基板穴寸法(基板厚1.6t)

OBSOLETE PN:4-171825-6.

	37.5	35.0	14	15	9	171825-5	7	171825-5	5	171825-5	3	171825-5	1	171825-5
	32.5	30.0	12	13	9	3	7	3	5	3	3	3	1	3
	27.5	25.0	10	11	9	1	7	1	5	1	3	1	1	1
	30.0	27.5	11	12	9	2	7	2	5	2	3	2	1	2
	25.0	22.5	9	10	9	0	7	0	5	0	3	0	1	0
	22.5	20.0	8	9	8	9	6	9	4	9	2	9		9
	20.0	17.5	7	8	8	8	6	8	4	8	2	8		8
	17.5	15.0	6	7	8	7	6	7	4	7	2	7		7
	15.0	12.5	5	6	8	6	6	6	4	6	2	6		6
	12.5	10.0	4	5	8	5	6	5	4	5	2	5		5
	10.0	7.5	3	4	8	4	6	4	4	4	2	4		4
	7.5	5.0	2	3	8	3	6	3	4	3	2	3		3
図示			2	8-171825-2	6-171825-2	4-171825-2	2-171825-2	171825-2						
±0.2 C	±0.5 B	A	NO OF POS 極数	RED 赤色 	GREEN 緑色 	BLUE 青色 	BLACK 黒色 	NATURAL 自然色 	PART NUMBER 型番					

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T.DOI 14MAY77		 TE Connectivity					
DIMENSIONS: 單位: 耗 mm		CHK H.TAGUCHI 14MAY77							
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		APVD H.TAGUCHI 14MAY77		NAME 名称					
		0 PLC ± 0.3 1 PLC ± 0.3 2 PLC ± 0.3 3 PLC ± 0.3 4 PLC ± 0.3 ANGLES ± —		POST HEADER ASSY (VERTICAL) AMP EI SERIES CONNECTOR					
MATERIAL 材料 HSG : 66NYLON — UL94V-0 POST: BRASS		FINISH 仕上 TIN-PLATE 0.8um MIN. ALL OVER NICKEL 0.5um MIN. UNDERPLATED		PRODUCT SPEC 製品規格 APPLICATION SPEC 取付適用規格 WEIGHT 0.000000		SIZE A3	CAGE CODE 00779	DRAWING NO 番号 C-171825	RESTRICTED TO —
CUSTOMER DRAWING						SCALE 尺度 4:1	SHEET 1 OF 1	REV Y4	