

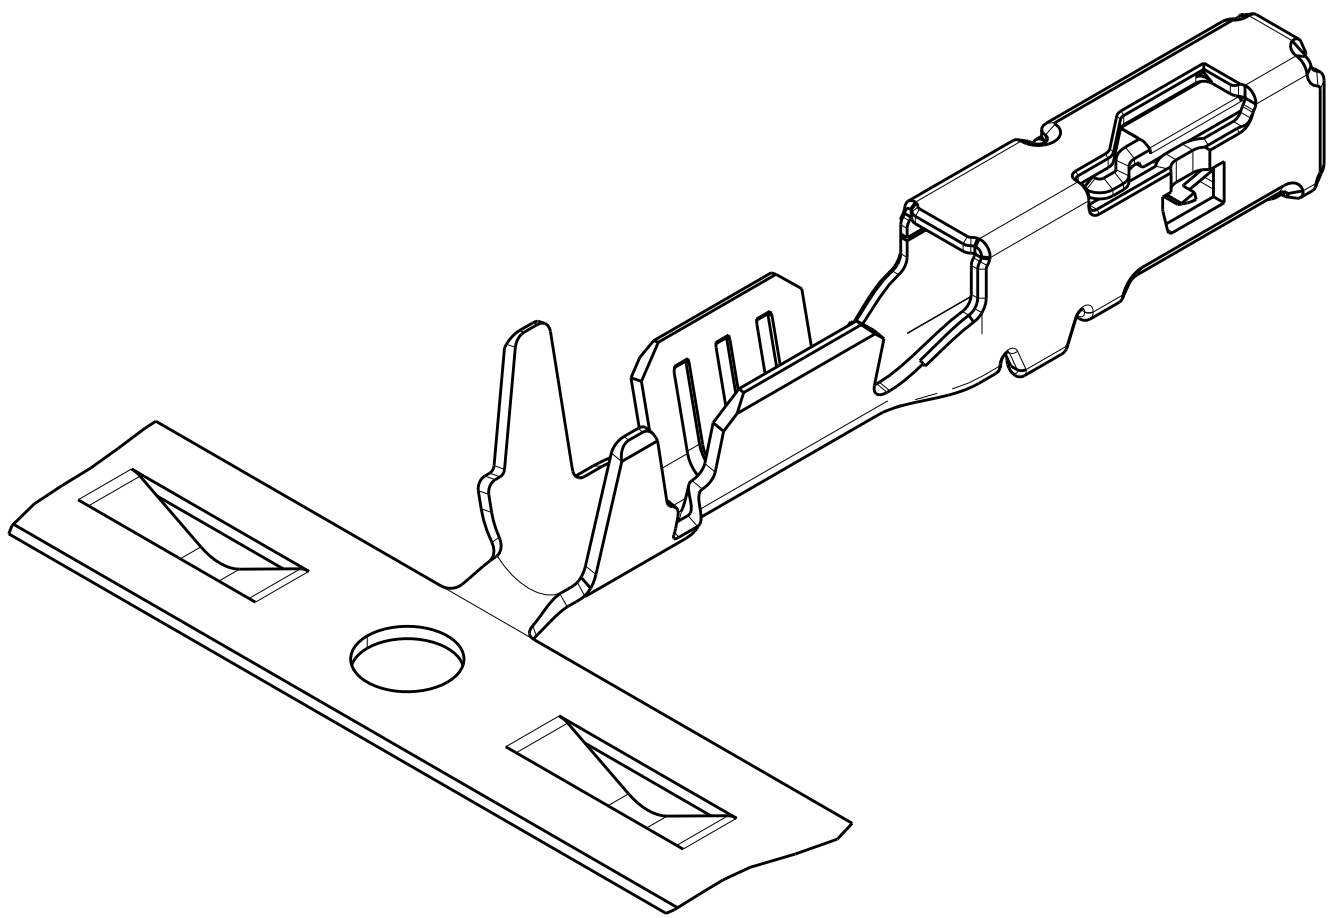
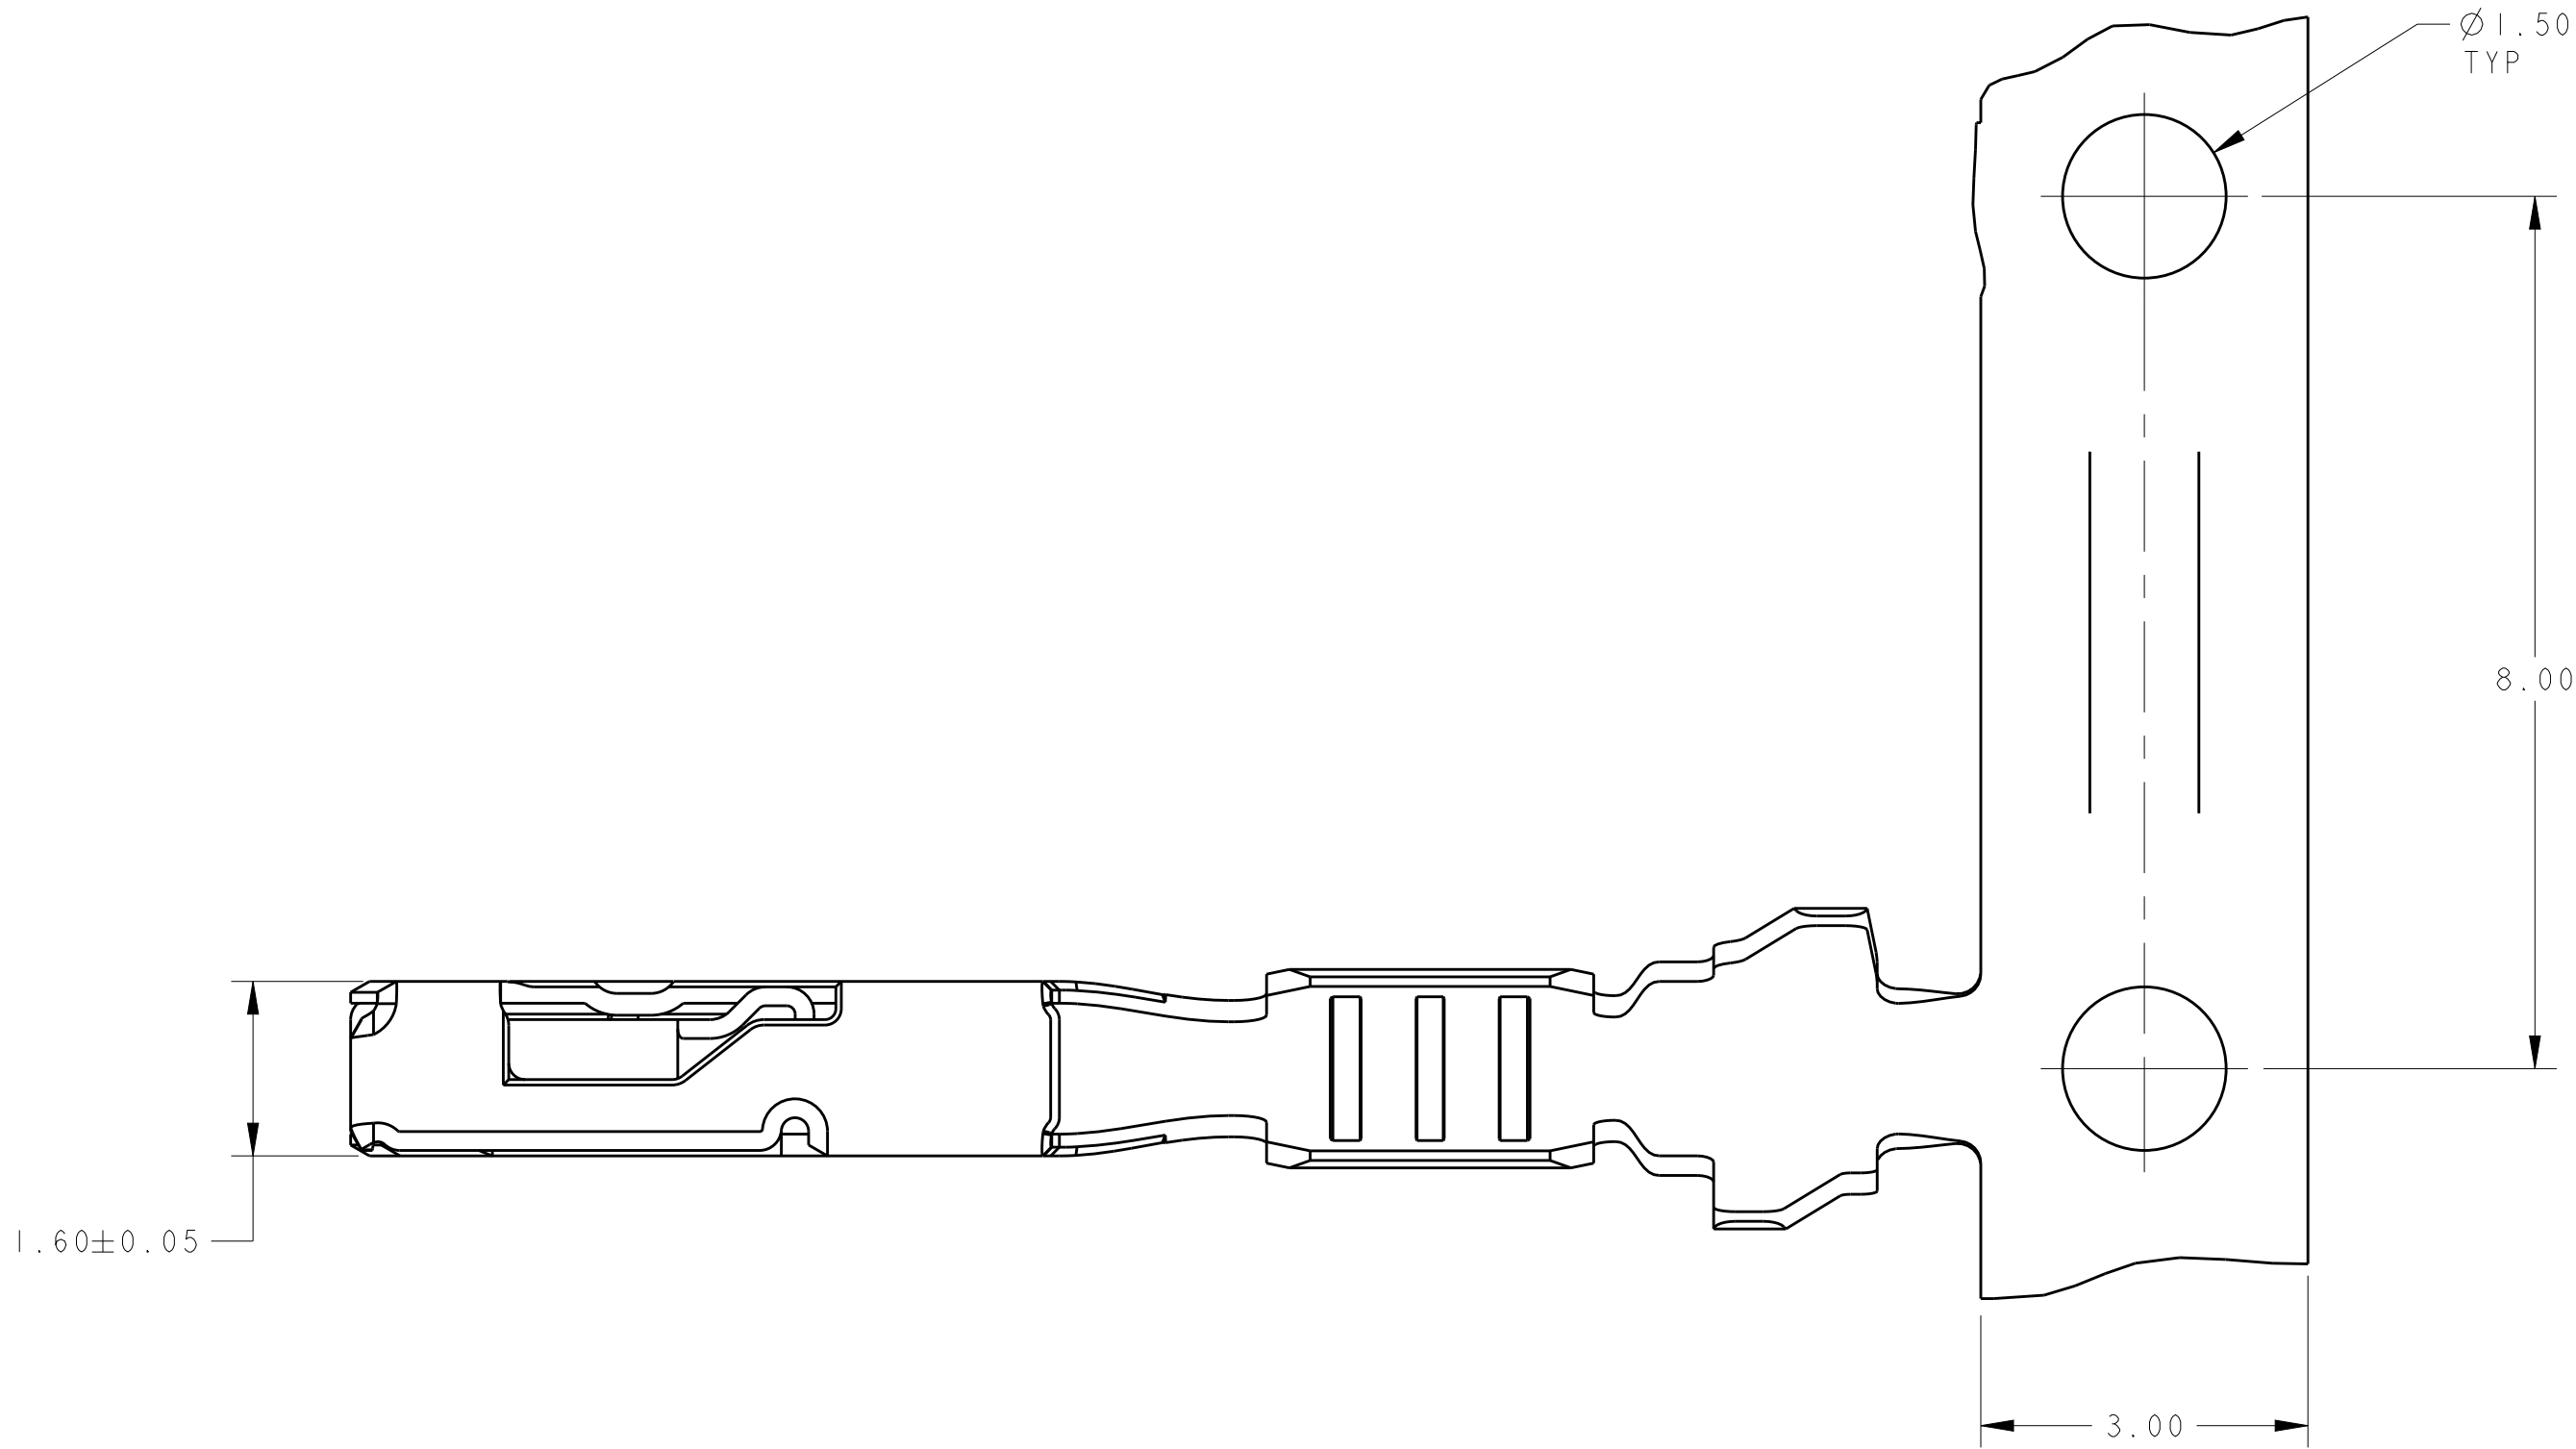



REVISIONS					
P.	LTR.	DESCRIPTION	DATE	DWN.	APVD.
	B	REVISED PER ECR-16-005516	25APR2016	DD	CS

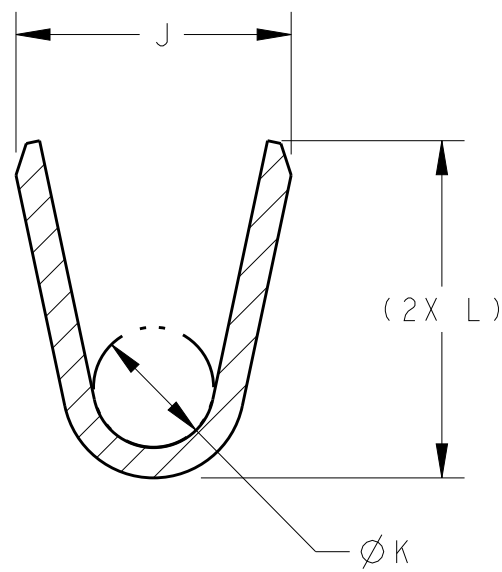

ISOMETRIC VIEW
SCALE 10:1

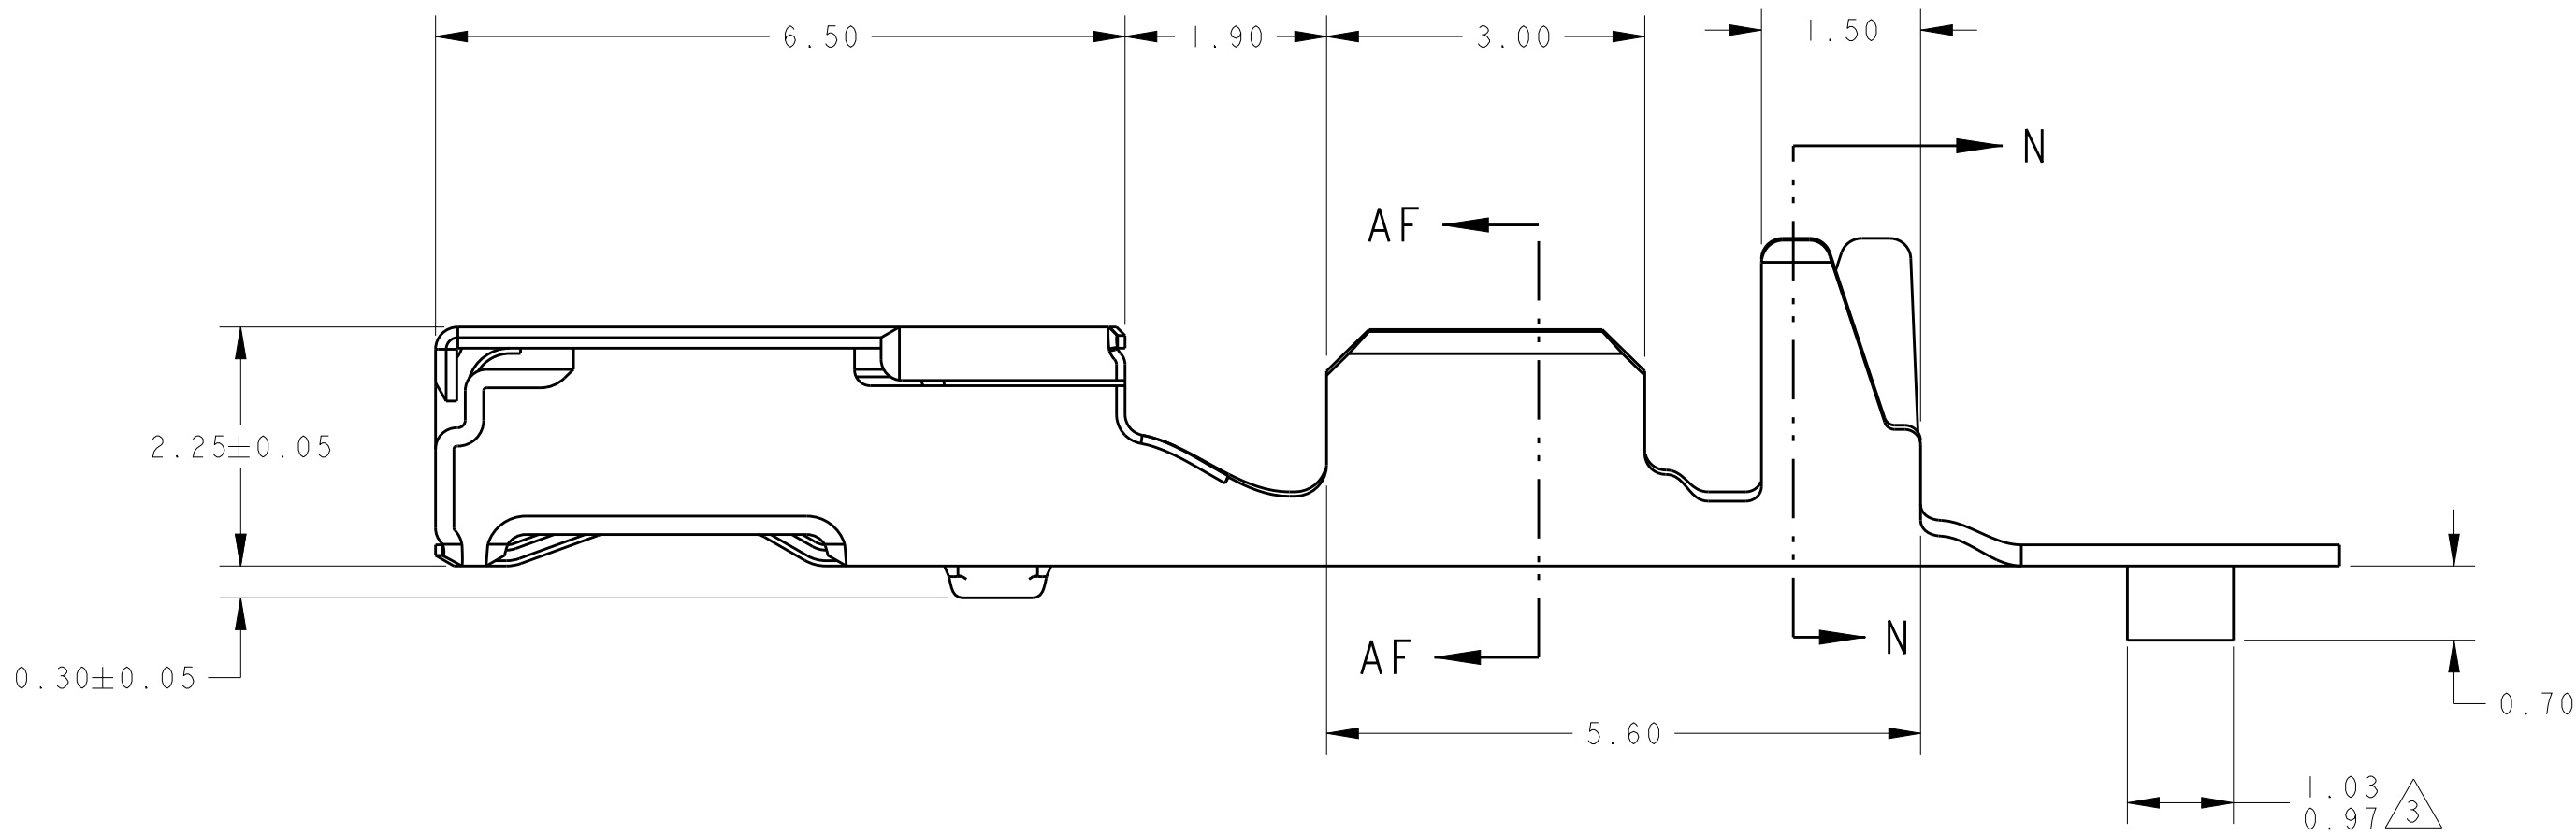


SECTION AF-AF
SCALE 20:1

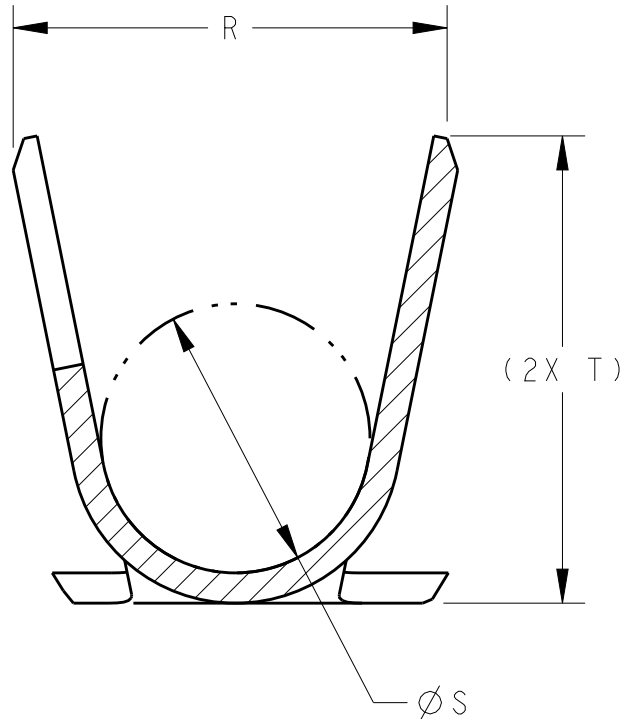

SECTION N-N
SCALE 20:1

- 1 MATERIAL: 0.2mm THICK CuNiSi ALLOY
- 2 FINISH: PRE-PLATED WITH 1.00µm MIN BRIGHT TIN
- 3 MATERIAL ID FEATURE IN "DOWN" POSITION
- 4 THIS PRODUCT DESIGNED TO COMPLY WITH USCAR-2, REVISION 5 TEMP CLASS 3, MOUNTED TO ENGINE VIBRATION PROFILE
- 5 THIS PRODUCT IS DESIGNED TO BE COMPATIBLE WITH SEALED APPLICATIONS.
- 6 NORMAL FORCE 240 GRAMS REFERENCE.
- 7 TERMINAL HAS NYE LUBRICANTS NYETACT 568J-50-UV PERFORMANCE LUBE/GREASE APPLIED. THIS IS A WHITISH COLORED LUBE. AMOUNT AND VISIBILITY MAY VARY.
- 8 NOT INTENDED FOR SEALED APPLICATIONS.
- 9 SEALING CAPABILITY MUST BE EVALUATED ON AN APPLICATION BASIS.

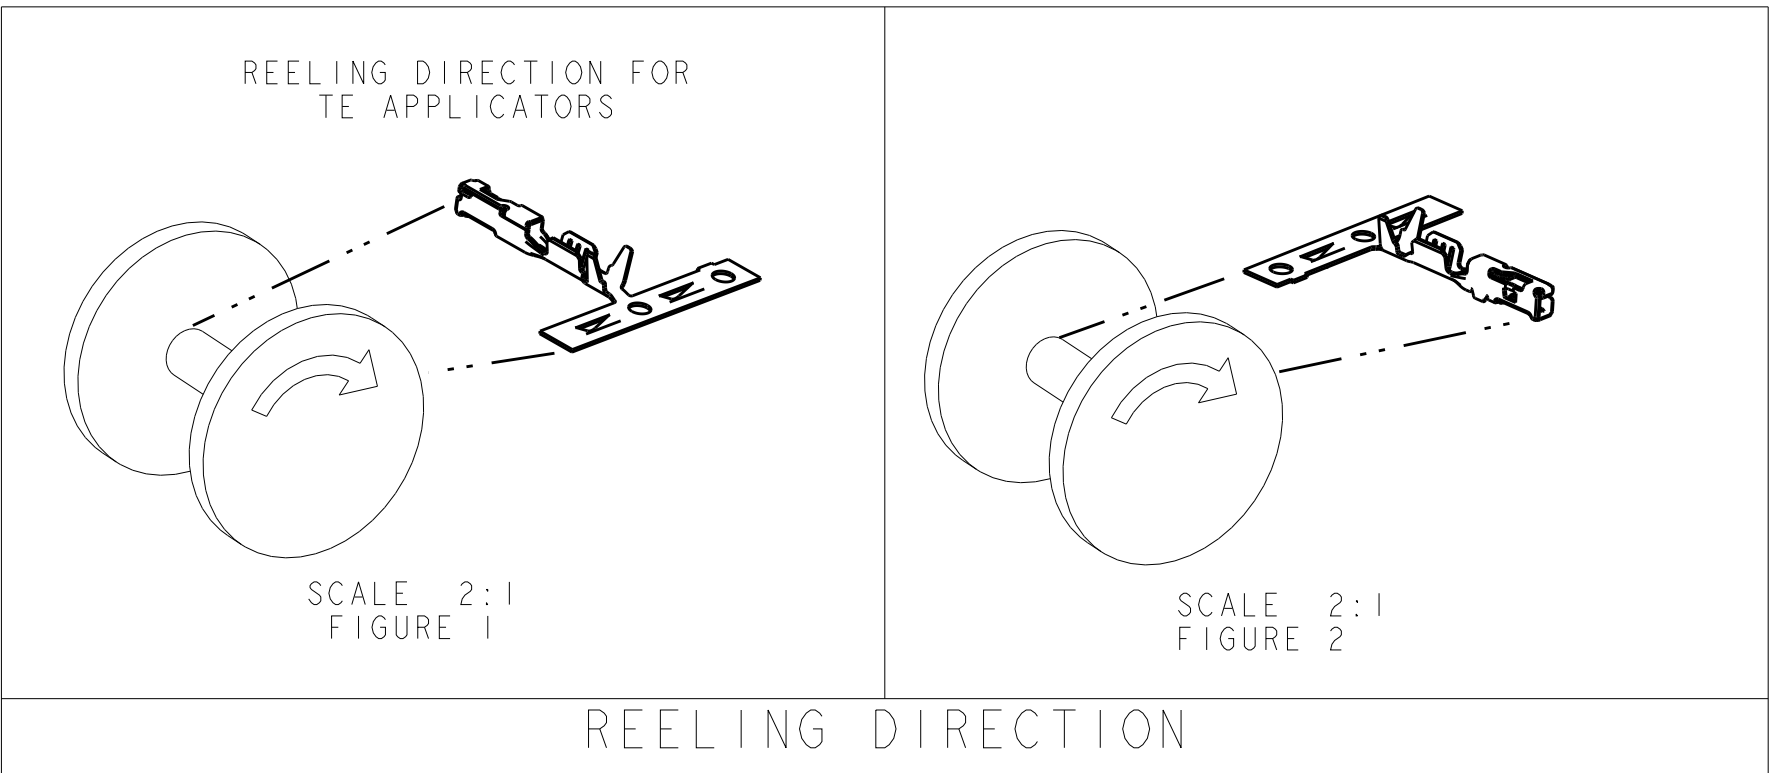

1.10-1.40	2.38	1.40	2.40	1.70	0.80	1.85	FIGURE 2	0.35	22	2098762-8	9			
0.85-1.05	2.09	0.85	1.82	1.46	0.65	1.50	FIGURE 2	0.13	26	2098762-7	8			
2.06 MAX	3.09	1.78	2.94	2.43	1.00	1.96	FIGURE 2	0.75	18	2098762-6				
1.50-1.85	3.09	1.78	2.94	2.23	0.80	1.82	FIGURE 2	0.35-0.50	20-22	2098762-5				
1.10-1.40	2.38	1.40	2.40	1.70	0.80	1.85	FIGURE 1	0.35	22	2098762-4	9			
0.85-1.05	2.09	0.85	1.82	1.46	0.65	1.50	FIGURE 1	0.13	26	2098762-3	8			
2.06 MAX	3.09	1.78	2.94	2.43	1.00	1.96	FIGURE 1	0.75	18	2098762-2				
1.50-1.85	3.09	1.78	2.94	2.23	0.80	1.82	FIGURE 1	0.35-0.50	20-22	2098762-1				
INSULATION DIAMETER	T	S	R	L	K	J	REELING DIRECTION	mm ²	AWG	PART NUMBER				
	DIMENSION							WIRE SIZE						
THIS DRAWING IS A CONTROLLED DOCUMENT.							DWN F KINSEY 04FEB2010	TE Connectivity						
DIMENSIONS:							CHK F KINSEY 04FEB2010							
mm							APVD C SCHMID 04FEB2010	NAME		CONTACT, FEMALE, 0.64mm CuNiSi, BOTTOM ORIENTATION Sn PLATE				
							PRODUCT SPEC							
							APPLICATION SPEC							
							114-13183							
MATERIAL							FINISH	WEIGHT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
							-	-	A1	00779	C=2098762	-		
CUSTOMER DRAWING									SCALE	15:1	SHEET	1 OF 1	REV	B