

F

E

D

C

B

A


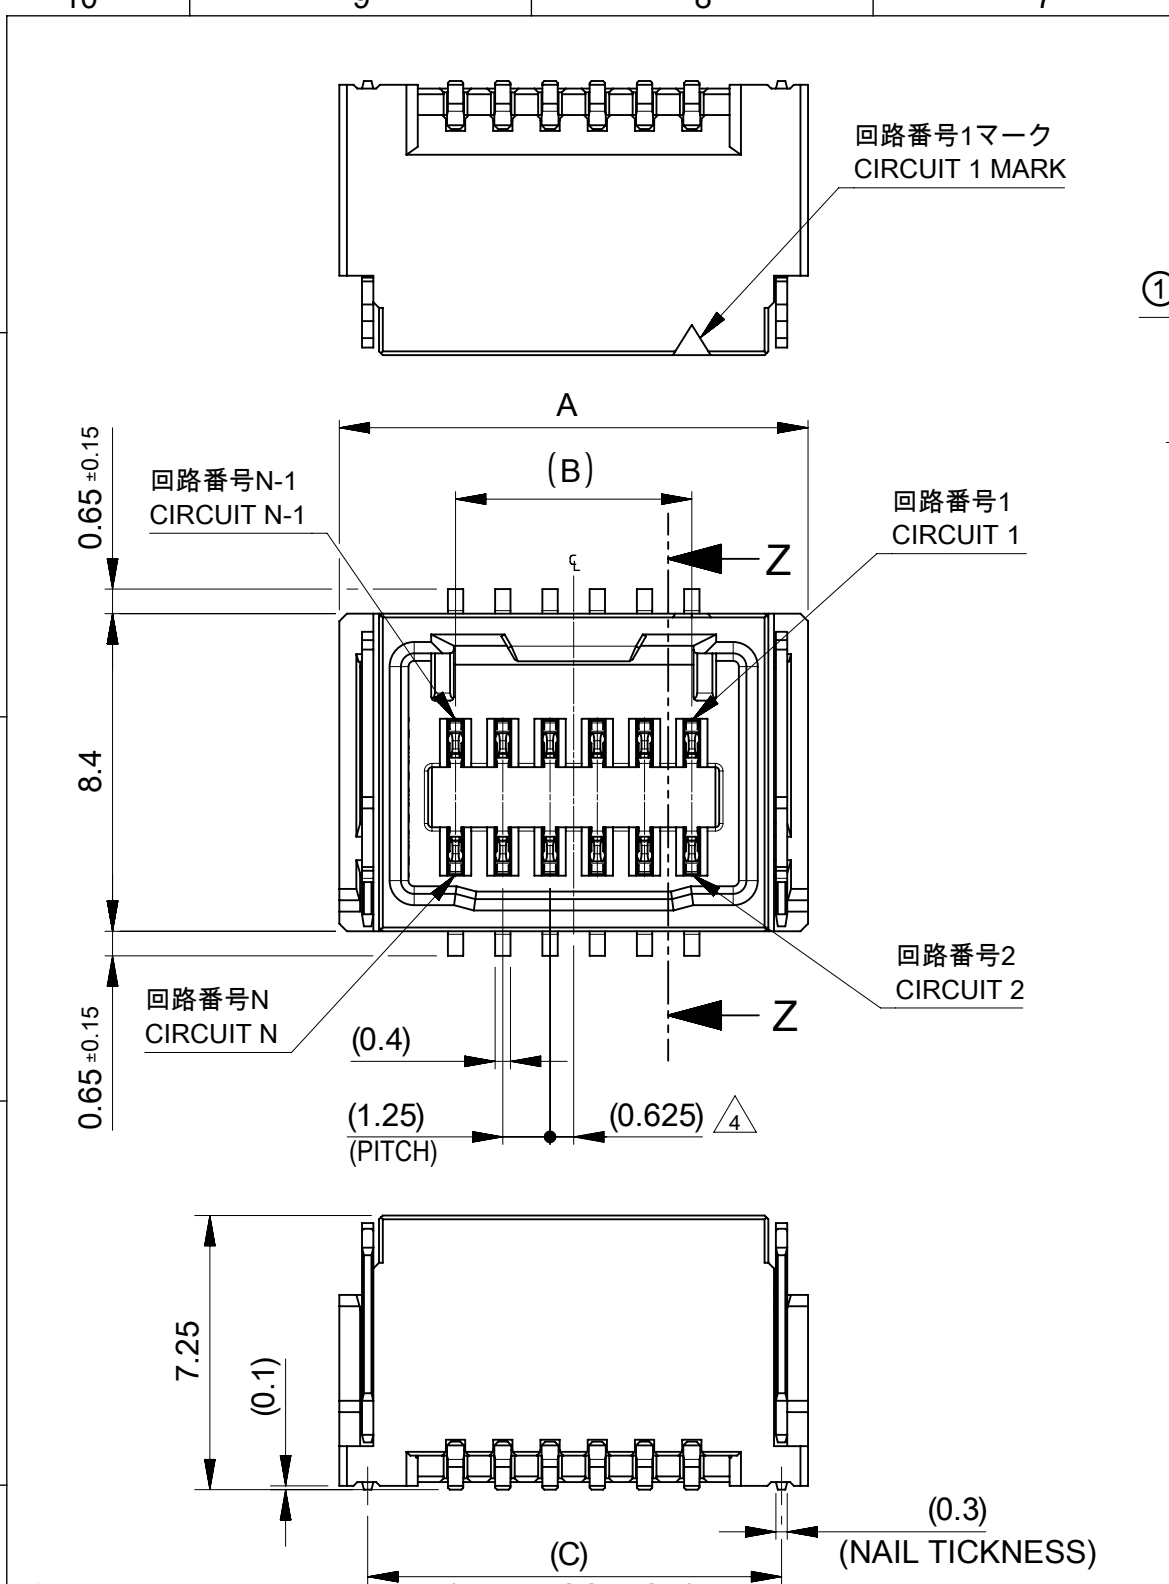


TABLE 1					(NAIL POSITION)	
番号 NO.	部品 PART	材質 MATERIAL				
①	ハウジング HOUSING	ポリアミド(PA) UL94V-0 色 : 表参照 POLYAMIDE(PA) UL94V-0 COLOR : SEE CHART				
②	ターミナル TERMINAL	黄銅 BRASS				
		接点部、テール部めっき CONTACT, TAIL PLATING		錫ビスマスめっき : 1.0 MICROMETER MINIMUM TIN-BISMUTH PLATING		
		下地めっき UNDER PLATING		ニッケルめっき : 1.0 MICROMETER MINIMUM NICKEL PLATING (UNDER PLATING)		
③	ネイル NAIL	黄銅 BRASS				
		テール部めっき TAIL PLATING		錫ビスマスめっき : 1.0 MICROMETER MINIMUM TIN-BISMUTH PLATING		
		下地めっき UNDER PLATING		ニッケルめっき : 1.0 MICROMETER MINIMUM NICKEL PLATING (UNDER PLATING)		
DOCUMENT STATUS		P1	RELEASE DATE	2022/11/30	03:03:36	

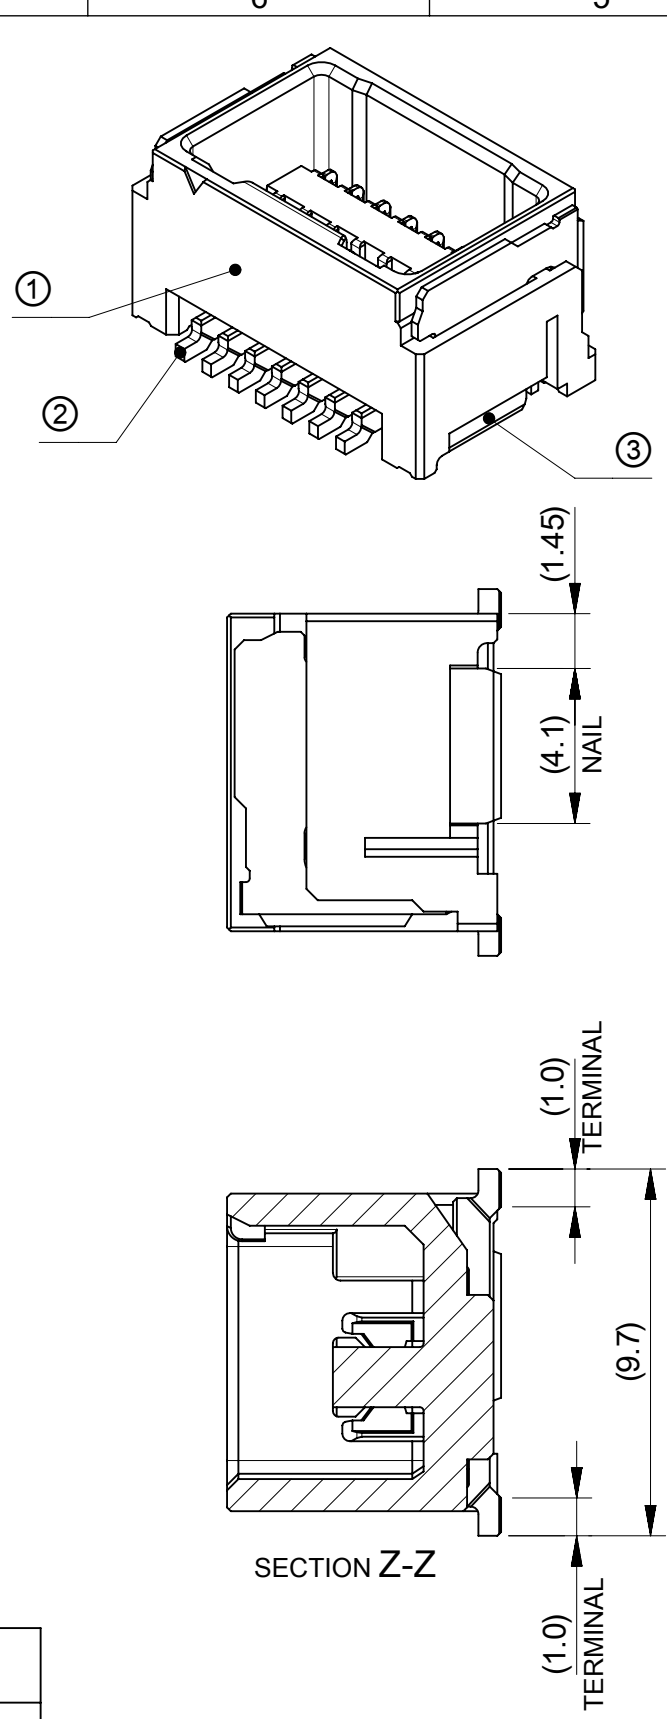



- 注記 :
NOTES :
- ① 材料及び仕上げ(めっき仕様) : TABLE 1, TABLE2 参照
MATERIAL AND FINISHES (PLATING SPECIFICATION) : SEE TABLE 1, TABLE2.
 - ② 製品仕様書、コネクタ取扱説明書、適合嵌合相手はSHEET 5をご参照下さい。
PLEASE REFER TO SHEET 5 FOR PRODUCT SPECIFICATION, APPLICATION SPECIFICATION AND MATE WITH.
 - 3. 端子テール部 及び ネイルの平坦度 : 0.12 MAXIMUM
TAIL AND NAIL COPLANARITY TO BE 0.12 MAXIMUM
 - ④ 極数 / 2 = 偶数に適合
APPLY TO CIRCUIT SIZE / 2 = EVEN.
 - ⑤ 発注番号 : 製品一覧参照
ORDER NUMBER : PLEASE REFER TO ORDER NUMBER LIST

極数 CIRCUIT SIZE		番号 NO.	ハウジングカラー HOUSING COLOR
207760****	↑↑↑	0	ナチュラル (白) NATURAL(WHITE)
		1	黒 BLACK
		2	赤 RED
		3	黄 YELLOW
		4	青 BLUE
番号 NO.	カバーテープ COVER TAPE		
7	無 WITHOUT		
8	有 WITH		

12.2	7.5	13.65	14
10.95	6.25	12.4	12
9.7	5	11.15	10
8.45	3.75	9.9	8
8.1	2.5	9.55	6
6.85	1.25	8.3	4
C	B	A	極数 CIRCUIT SIZE

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		molex			
DIMENSION UNITS	SCALE			MICRO-LOCK PLUS 1.25 W/B DUAL ROW VERTICAL SMT PLUG ASSEMBLY FOR POTTING			
mm	NTS			PRODUCT CUSTOMER DRAWING			
GENERAL TOLERANCES (UNLESS SPECIFIED)							
ANGULAR TOL	± 3.0 °						
4 PLACES	± 0.2						
3 PLACES	± 0.2						
2 PLACES	± 0.2						
1 PLACE	± 0.2						
0 PLACES	± 0.2						
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
		⊕	A3-SIZE	207760	SEE SHEET 5	GENERAL	1 OF 5

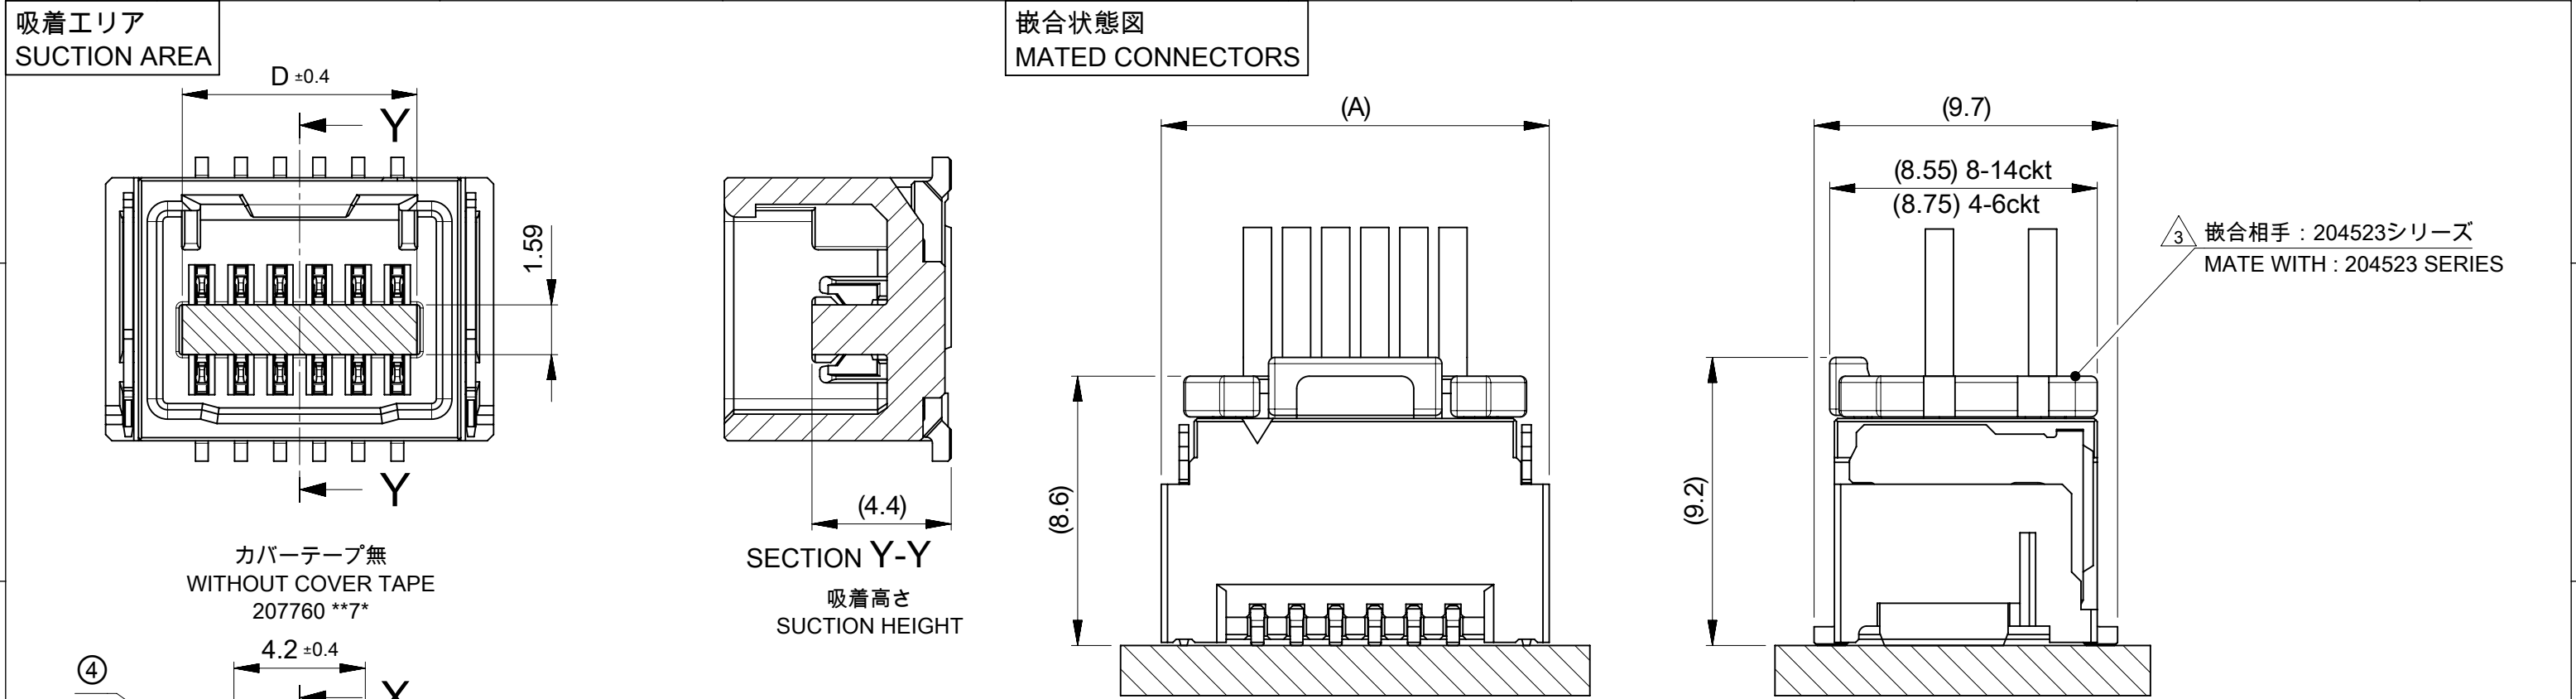

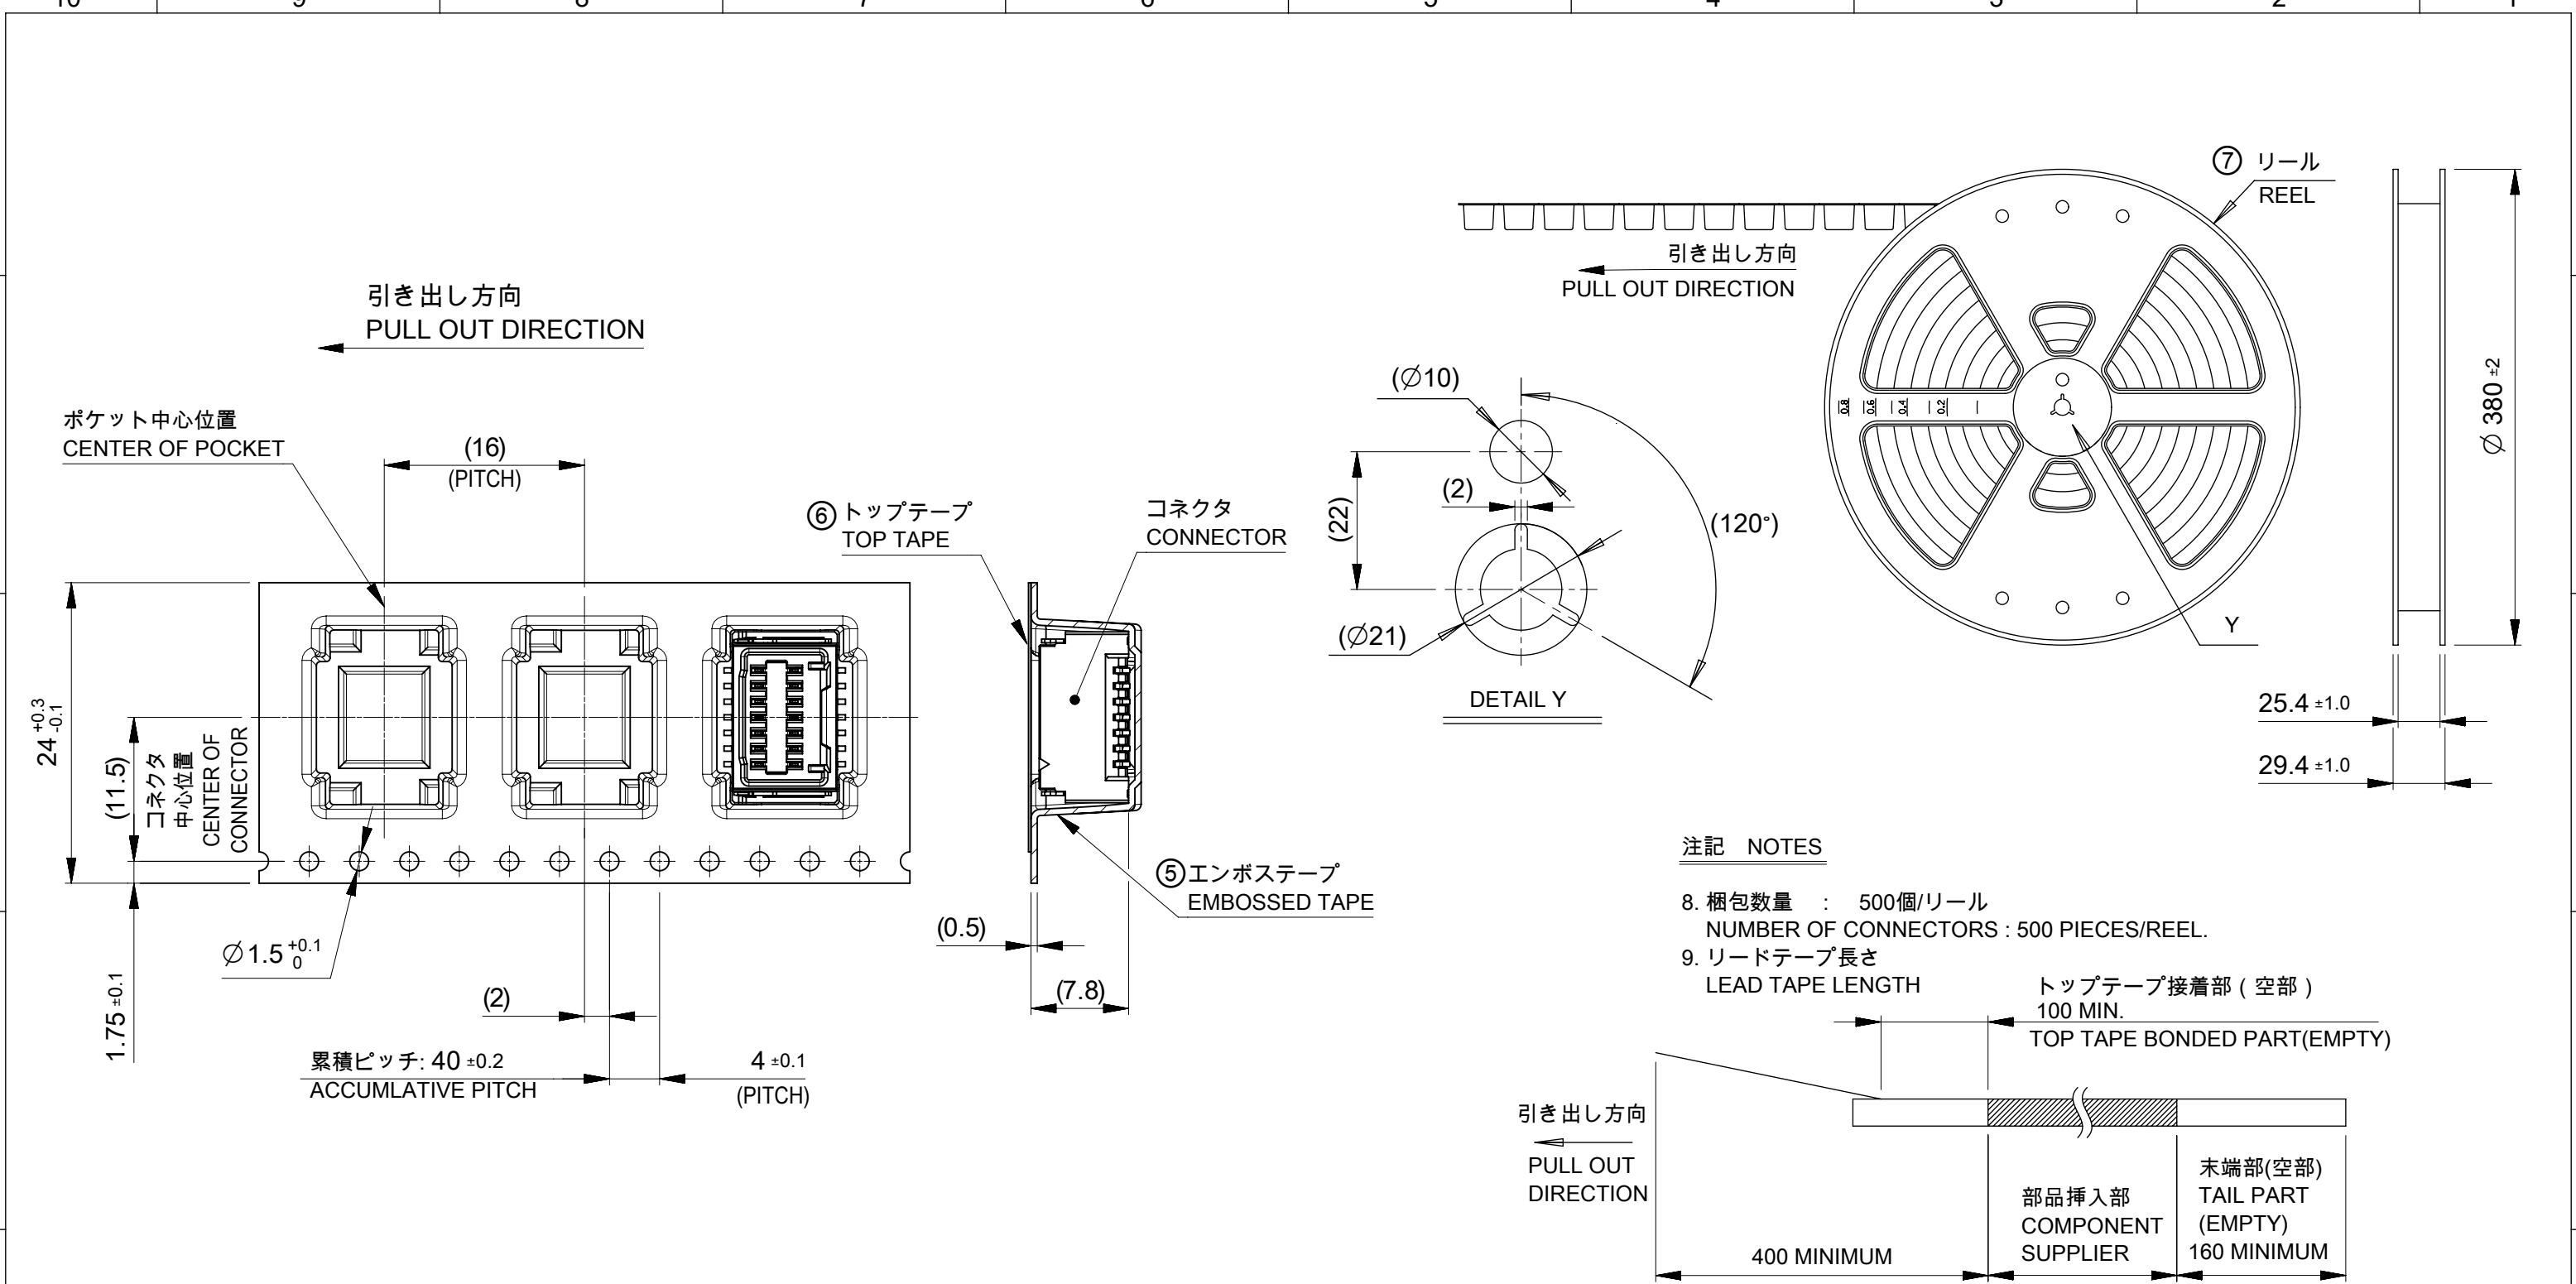

注記 NOTES

8. 梱包数量 : 500個/リール
NUMBER OF CONNECTORS : 500 PIECES/REEL.
9. リードテープ長さ
LEAD TAPE LENGTH
- トップテープ接着部 (空部)
100 MIN.
TOP TAPE BONDED PART (EMPTY)

引き出し方向
PULL OUT
DIRECTION

10. トップテープの剥離強度については、IEC60286-3に準拠
TOP TAPE PEELING FORCE IS DEFINED BY IEC60286-3.

△ TABLE3

番号 NO.	部品 PART	材質 MATERIAL
⑤	エンボステープ EMBOSSSED TAPE	ポリスチレン(PS) POLYSTYRENE(PS)
⑥	トップテープ TOP TAPE	ポリエチレン(PE)、その他 POLYETHYLENE(PE), etc
⑦	リール REEL	ポリスチレン(PS) <リサイクル材を含む> POLYSTYRENE(PS) <RECYCLE MATERIAL CONTAINED>

DOCUMENT STATUS	P1	RELEASE DATE	2022/11/30	03:03:36
-----------------	----	--------------	------------	----------

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
DIMENSION UNITS		SCALE		CURRENT REV DESC:			molex					
mm		NTS										
GENERAL TOLERANCES (UNLESS SPECIFIED)				MICRO-LOCK PLUS 1.25 W/B DUAL ROW VERTICAL SMT PLUG ASSEMBLY FOR POTTING								
ANGULAR TOL ± 3.0 °												
4 PLACES		± 0.2								EC NO: 720259		
3 PLACES		± 0.2								DRWN: SOKUMURA01 2022/11/10		
2 PLACES		± 0.2								CHK'D: SAKIYAMA 2022/11/28		
1 PLACE		± 0.2		APPR: AIDA 2022/11/30		PRODUCT CUSTOMER DRAWING						
0 PLACES		± 0.2		INITIAL REVISION:		DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION		
DRWN: TENAGASE 2019/05/31				2077600000-SD		PSD		000	B			
APPR: KOMURAKAMI 2020/01/16				THIRD ANGLE PROJECTION		DRAWING		SHEET NUMBER				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						A3-SIZE		207760		SEE SHEET 5	GENERAL	4 OF 5

10	9	8	7	6	5	4	3	2	1																			
△2 適合製品及び各種仕様書 APPLICABLE PRODUCTS AND VARIOUS SPECIFICATIONS <table><tr><td colspan="2">梱包仕様書 PACKAGING SPECIFICATION</td><td colspan="2">2077609200-SPK PS 200</td></tr></table><table><tr><td rowspan="2">適合嵌合相手 MATE WITH</td><td>シリーズ番号 SERIES NUMBER</td><td>204523</td><td>214527</td></tr><tr><td>リテーナー対応 RETAINER APPLICABLE</td><td>NOT COMPLIANT</td><td>COMPLIANT (NATURAL, BLACK)</td></tr><tr><td colspan="2">製品仕様書 PRODUCT SPECIFICATION</td><td>2045230001-PS PS 000</td><td>2145270001-PS PS 000</td></tr><tr><td colspan="2">コネクタ取扱説明書 APPLICATION SPECIFICATION</td><td colspan="2">5054320000-AS PS 000</td></tr></table>										梱包仕様書 PACKAGING SPECIFICATION		2077609200-SPK PS 200		適合嵌合相手 MATE WITH	シリーズ番号 SERIES NUMBER	204523	214527	リテーナー対応 RETAINER APPLICABLE	NOT COMPLIANT	COMPLIANT (NATURAL, BLACK)	製品仕様書 PRODUCT SPECIFICATION		2045230001-PS PS 000	2145270001-PS PS 000	コネクタ取扱説明書 APPLICATION SPECIFICATION		5054320000-AS PS 000	
梱包仕様書 PACKAGING SPECIFICATION		2077609200-SPK PS 200																										
適合嵌合相手 MATE WITH	シリーズ番号 SERIES NUMBER	204523	214527																									
	リテーナー対応 RETAINER APPLICABLE	NOT COMPLIANT	COMPLIANT (NATURAL, BLACK)																									
製品仕様書 PRODUCT SPECIFICATION		2045230001-PS PS 000	2145270001-PS PS 000																									
コネクタ取扱説明書 APPLICATION SPECIFICATION		5054320000-AS PS 000																										