




AMPMODU | AMPMODU Headers

TE Internal #: 826925-5

PCB Mount Header, Vertical, Board-to-Board, 10 Position, 2.54 mm  
 [.1 in] Centerline, Breakaway, Tin, Through Hole - Solder, Signal,  
 AMPMODU Headers

[View on TE.com >](#)

Connectors > PCB Connectors > PCB Headers & Receptacles

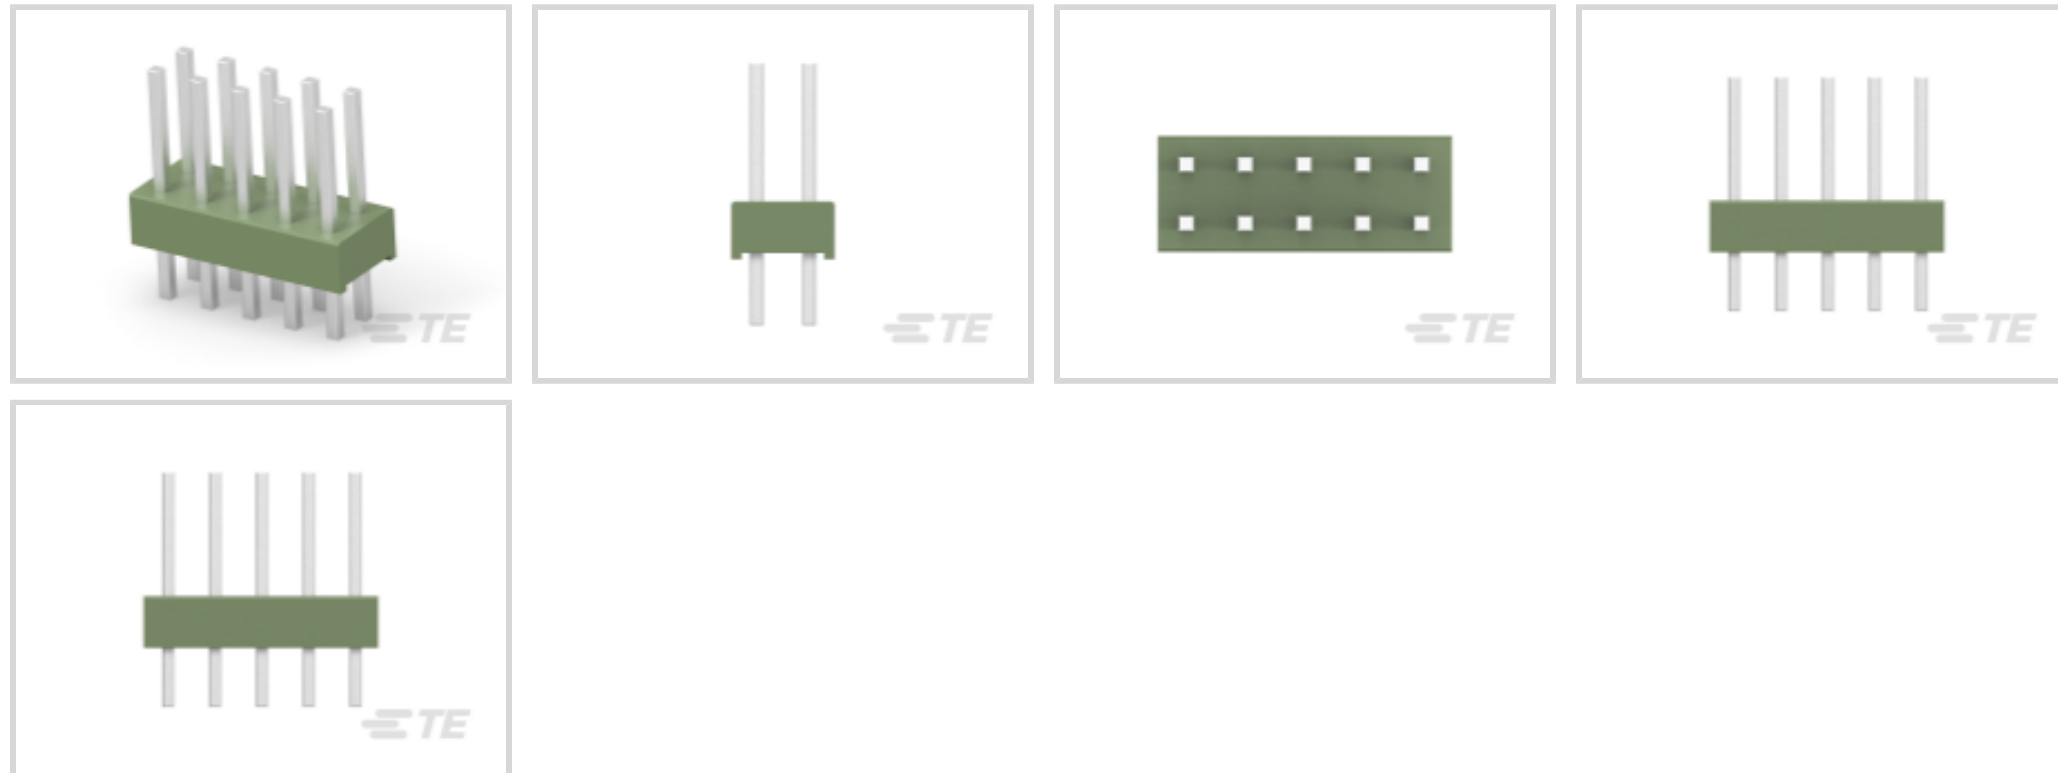

EU RoHS Compliance: **Compliant**

EU ELV Compliance: **Compliant**

PCB Connector Assembly Type: **PCB Mount Header**

PCB Mount Orientation: **Vertical**

Connector System: **Board-to-Board**

**Features**

**Other**

|                    |           |
|--------------------|-----------|
| EU RoHS Compliance | Compliant |
| EU ELV Compliance  | Compliant |

**Product Type Features**

|                                   |                       |
|-----------------------------------|-----------------------|
| PCB Connector Assembly Type       | PCB Mount Header      |
| Connector System                  | Board-to-Board        |
| Header Type                       | Breakaway             |
| Sealable                          | No                    |
| Connector & Contact Terminates To | Printed Circuit Board |

**Configuration Features**

|                                  |              |
|----------------------------------|--------------|
| Connector Contact Load Condition | Fully Loaded |
| Board-to-Board Configuration     | Parallel     |
| PCB Mount Orientation            | Vertical     |
| Number of Positions              | 10           |
| Number of Rows                   | 2            |



### Electrical Characteristics

|                                       |          |
|---------------------------------------|----------|
| Insulation Resistance                 | 5000 MΩ  |
| Dielectric Withstanding Voltage (Max) | 750 Vrms |

### Body Features

|                       |       |
|-----------------------|-------|
| Primary Product Color | Green |
|-----------------------|-------|

### Contact Features

|   |                  |
|---|------------------|
| Contact Underplating Material                           | Nickel           |
| Contact Mating Area Plating Material Thickness          | 3 μm[118.11 μin] |
| Mating Square Post Dimension                            | .63 mm[.025 in]  |
| PCB Contact Termination Area Plating Material Thickness | 2 μm             |
| Contact Shape & Form                                    | Square           |
| Contact Base Material                                   | Phosphor Bronze  |
| PCB Contact Termination Area Plating Material           | Tin              |
| Contact Mating Area Plating Material                    | Tin              |
| Contact Type  | Pin              |
| Contact Current Rating (Max)                            | 5 A              |

### Termination Features

|  |                       |
|--|-----------------------|
| Termination Post & Tail Length           | 3.2 mm[.126 in]       |
| Square Termination Post & Tail Dimension | .63 mm[.025 in]       |
| Termination Method to PCB                | Through Hole - Solder |

### Mechanical Attachment

|                         |             |
|-------------------------|-------------|
| PCB Mount Retention     | Without     |
| PCB Mount Alignment     | Without     |
| Connector Mounting Type | Board Mount |
| Mating Alignment        | Without     |

### Housing Features

|                    |                |
|--------------------|----------------|
| Housing Material   | PBT            |
| Centerline (Pitch) | 2.54 mm[.1 in] |

### Dimensions

|                             |                  |
|-----------------------------|------------------|
| Row-to-Row Spacing          | 2.54 mm[.1 in]   |
| PCB Thickness (Recommended) | 1.57 mm[.062 in] |

### Usage Conditions



|                             |                            |
|-----------------------------|----------------------------|
| Housing Temperature Rating  | Standard                   |
| Operating Temperature Range | -65 – 105 °C[-85 – 221 °F] |

### Operation/Application

|                     |        |
|---------------------|--------|
| Circuit Application | Signal |
|---------------------|--------|

### Industry Standards

|                        |          |
|------------------------|----------|
| UL Flammability Rating | UL 94V-0 |
|------------------------|----------|

### Packaging Features

|                    |     |
|--------------------|-----|
| Packaging Quantity | 400 |
| Packaging Method   | Box |

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

|   |   |
|---|---|
| EU RoHS Directive 2011/65/EU                  | Compliant   |
| EU ELV Directive 2000/53/EC                   | Compliant   |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold   |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2024 (241)<br>Candidate List Declared Against: JUNE 2024 (241)<br>Does not contain REACH SVHC |
| Halogen Content                               | Not Low Halogen - contains Br or Cl > 900 ppm.  |
| Solder Process Capability                     | Wave solder capable to 265°C  |


#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

### Compatible Parts




TE Part # 925367-5  
MOD 4 REC.HSG 2X05P

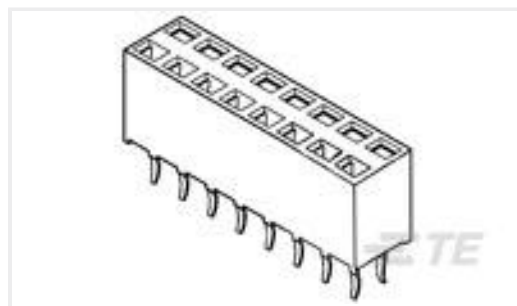


TE Part # 215310-5  
2X5P HV100 REC CON. TE, 8.5MM,TIN



TE Part # 1355347-5  
2x5P HV100 REC. CON, SMD, TIN, BLISTER

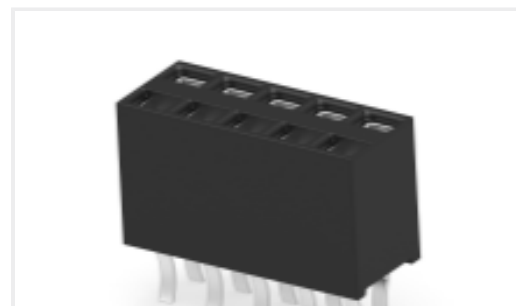

TE Part # 215308-5  
2X 5P HV100 REC CON. TE, 7.0MM, TIN

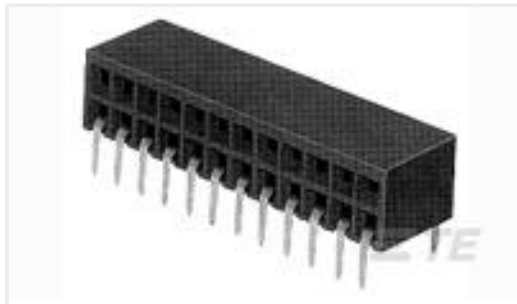

TE Part # 216603-5  
2X 5P HV190FEDERLEI


Also in the Series | **AMPMODU Headers**



Connector Contacts(52)



Connector Hardware(1)

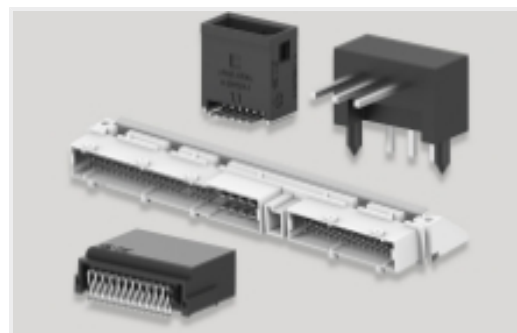

PCB Headers & Receptacles(1618)



Wire-to-Board Connector Assemblies & Housings(5)

Customers Also Bought



TE Part #T4171310504-001  
M12,FRONT MOUNTING,FEMALE,D, 4P,0.2M WIRE



TE Part #2-1761607-9  
IDC LOW PRO HDR 26P RA LG LAT



TE Part #2-1761607-3  
IDC LOW PRO HDR 10P RA LG LAT



TE Part #826634-5  
05P MODU 2 PIN HDR.




TE Part #4-2176345-4  
CRGCO 1210 39K 1%




TE Part #1939870-1  
SD CARD CONNECTOR EMBOSS ASSY



TE Part #114712-E  
MICROS STV 12 407 188 \* 0007 J 3 114712



TE Part #928205-3  
3P TELFIX BU-GEH

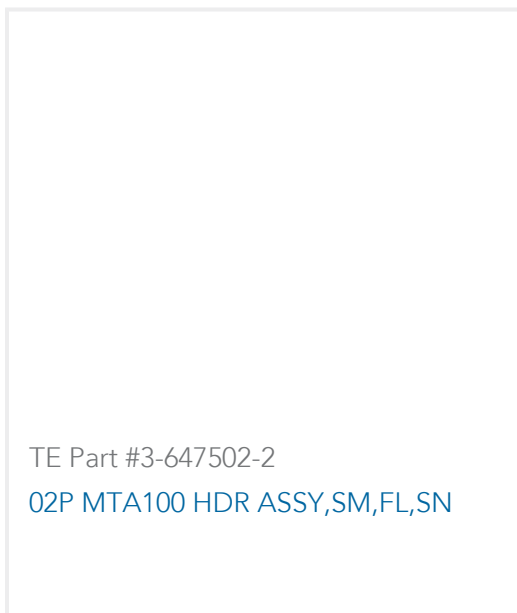

## Documents

### Product Drawings

[5P MOD2 STIFT LEI](#)

English

### CAD Files

[3D PDF](#)

English

Customer View Model

[ENG\\_CVM\\_826925-5\\_O.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_826925-5\\_O.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_826925-5\\_O.3d\\_stp.zip](#)

English

[3D PDF](#)

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_826925-5\\_L.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_826925-5\\_L.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_826925-5\\_L.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Agency Approvals

[UL Report](#)

English