




MTA 100

TE Internal #: 3-647001-4

Connector Assembly, Plug, Mating Alignment, Polarization Mating Alignment Type, Mating Retention, MTA 100, Standard Rectangular Connectors

[View on TE.com >](#)

Connectors > Rectangular Connectors > Standard Rectangular Connectors > MTA Plug: Nylon, Tin Plated, 2.54 mm, with Mating Alignment

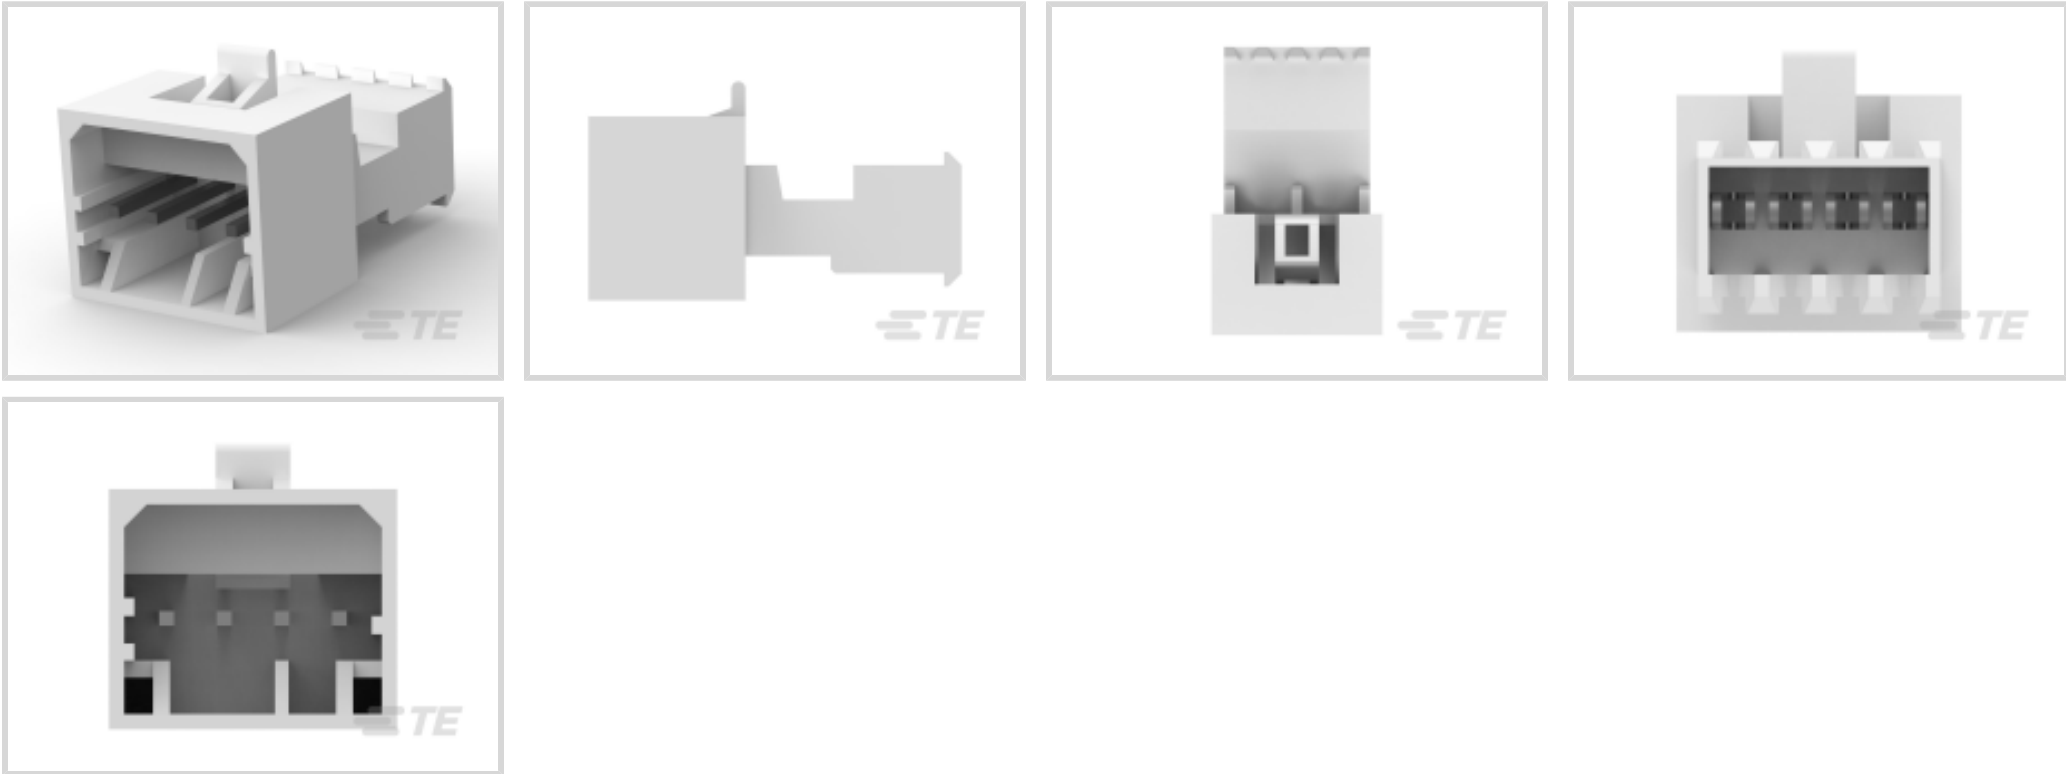

Connector Product Type: **Connector Assembly**

Connector & Housing Type: **Plug**

Mating Alignment: **With**

Mating Alignment Type: **Polarization**

Mating Retention: **With**

[All MTA Plug: Nylon, Tin Plated, 2.54 mm, with Mating Alignment \(28\)](#)

Features

Product Type Features

Connector Product Type	Connector Assembly
Connector & Housing Type	Plug
Connector System	Wire-to-Wire
Insertion Force Type	Normal
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Compatible With Discrete Wire Type	Stranded

Mechanical Attachment

Mating Alignment	With
Mating Alignment Type	Polarization
Mating Retention	With
Mating Retention Type	Latch
Connector Mounting Type	Cable Mount (Free-Hanging)



Contact Retention Type Within Housing	Locking Lance
Termination Features	
Termination Method to Wire & Cable	Insulation Displacement (IDC)
Operation/Application	
Shielded	No
Circuit Application	Signal
Contact Features	
Contact Mating Area Plating Material	Tin
Contact Retention Within Housing	With
Contact Current Rating (Max)	5 A
Contact Underplating Material	Nickel
Wire Contact Termination Area Plating Material	Tin
Contact Type	Tab
Industry Standards	
UL Flammability Rating	UL 94V-2
Compatible With Agency/Standards Products	UL, CSA
UL Rating	Recognized
Compatible With Approved Standards Products	UL E28476
CSA Rating	LR 7189
Configuration Features	
Number of Positions	4
Number of Rows	1
Number of Cavities	4
Contacts Preloaded	Yes
Housing Features	
Centerline (Pitch)	2.54 mm[.1 in]
Housing Material	Nylon 6/6
Housing Color	White
Electrical Characteristics	
Operating Voltage	250 VAC
Usage Conditions	



Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Other

EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant

Dimensions

Product Width	21.4 mm[.843 in]
Product Length	12.7 mm[.5 in]
Connector Height	12.54 mm[.494 in]
Wire Size	24 AWG

Packaging Features

Packaging Quantity	200
Packaging Method	Bag/Box

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



Compatible Parts

TE Part # CAT-104MTA-NTPMR
Nylon Tin Plated Receptacle: 2.54 mm,
with Mating Alignment, MTA 100

TE Part # CAT-104MTA-NYLCC
Nylon PCB Connector Covers: 2.54
mm, MTA 100

TE Part # CAT-104MTA-NTPNR
MTA Receptacle: Nylon, Tin Plated,
2.54 mm

TE Part # CAT-104MTA-PLSCC
Polyester PCB Connector Covers: 2.54
mm, MTA 100

TE Part # 58074-1
MTA 50/100/156 MANUAL TOOL
FRAME

TE Part # 58638-1
MTA 100 CRIMP HEAD PRODUCTION
POSTED

Also in the Series | MTA 100

Connector Caps & Covers(69)

Connector Contacts(8)

Connector Hardware(1)

Insertion & Extraction Tools(2)

PCB Headers & Receptacles(441)

Standard Rectangular Connectors(495)

Wire-to-Board Connector Assemblies
& Housings(1)

Customers Also Bought



TE Part #4-1393250-0
W28-XQ1A-7=W28




TE Part #3-643817-6
06P MTA156 CONN ASSY 18AWG
ORA




TE Part #34147
PG R 22-16 COMM 22-18 MIL 6




TE Part #2-520264-2
ULTRAFAST 250 ASSY REC 22-18
TPBR LP

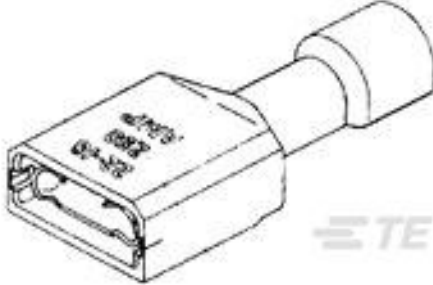

TE Part #2-520263-2
ULTRA-FAST 250 ASY REC 22-18 TPBR

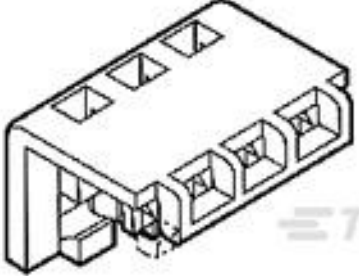

TE Part #643067-3
03P MTA156 MOLDED COVER



TE Part #2-328375-3
SPLICE,CE 22-14



TE Part #2-34147-1
PG R 22-16 COMM 22-18 MIL 6

TE Part #80536-000
LS803-51 LIQUID LEVEL SENSOR

TE Part #86530-000
FLS803-51 LIQUID LEVEL SENSOR

Documents

Product Drawings

04P MTA100 PSTD CONN ASSY SN

English

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_3-647001-4_E.2d_dxf.zip

English

Customer View Model

ENG_CVM_3-647001-4_E.3d_igs.zip

English

Customer View Model

ENG_CVM_3-647001-4_E.3d_stp.zip

English

3D PDF

3D



Customer View Model

[ENG_CVM_CVM_3-647001-4_C.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_3-647001-4_C.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_3-647001-4_C.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Application Specification](#)

English

Agency Approvals

[Agency Approval Document](#)

English