




**Part Number :** [5011902017](#)

**Product Description :** 1.00mm Pitch, Pico-Clasp PCB Header, Dual Row, Vertical, Surface Mount, 0.10µm Gold Plated, Inner Positive Lock, 20 Circuits, Natural

**Series Number :** 501190

**Status :** Active

**Product Category :** PCB Headers and Receptacles

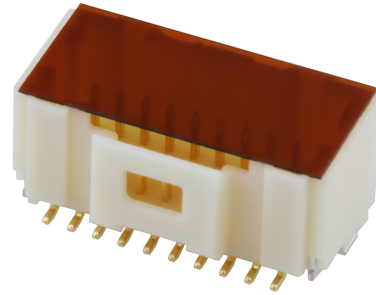

---

## Documents & Resources

### Drawings

[5011902017\\_sd.pdf](#)

### 3D Models and Design Files

[5011902017.dxf](#)

[5011902017.pdf](#)

[5011902017\\_stp.zip](#)

### Specifications

[5011890000-AS-000.pdf](#)

[SPK-501190-001-001.pdf](#)

[5011890000-PS-001.pdf](#)

[5011891000-PS-001.pdf](#)


[5011891000-PS-CHI-001.pdf](#)

[5011891000-PS-JAP-001.pdf](#)

---

## Product Environment Compliance

### Compliance

GADSL/IMDS	Compliant with Exemption 44; 33
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2024)6225-DC (07 Nov 2024)
EU RoHS	Compliant per EU 2015/863

## Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

## Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

## EU RoHS Certificate of Compliance

---

### Part Details

#### General

Status	Active
Category	PCB Headers and Receptacles
Series	501190
Description	1.00mm Pitch, Pico-Clasp PCB Header, Dual Row, Vertical, Surface Mount, 0.10µm Gold Plated, Inner Positive Lock, 20 Circuits, Natural
Application	Signal, Wire-to-Board
Comments	With Pick-and-Place Tape
Component Type	PCB Header
Product Name	Pico-Clasp
UPC	822348790203

#### Agency

UL	E29179
----	--------

#### Electrical

Current - Maximum per Contact	1.0A
Voltage - Maximum	100V AC (RMS)/DC

#### Physical

Breakaway	No
Circuits (Loaded)	20

Circuits (maximum)	20
Color - Resin	Natural
Durability (mating cycles max)	30
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Gold
Material - Resin	Nylon
Net Weight	315.600/mg
Number of Rows	2
Orientation	Vertical
Packaging Type	Embossed Tape on Reel
PCB Locator	No
PCB Retention	Yes
Pitch - Mating Interface	1.00mm
Plating min - Mating	0.102µm
Plating min - Termination	0.102µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Robotic Placement	Vacuum Pick-Up Tape
Shrouded	Fully
Stackable	No
Temperature Range - Operating	-40° to +105°C
Termination Interface Style	Surface Mount

---

## Mates With / Use With

### Mates with Part(s)

Description	Part Number
-------------	-------------

Pico-Clasp Low-Halogen Dual Row Receptacle Housings	<u>501189</u>
--	---------------

---

---

This document was generated on Dec 13, 2024