



Connectors > PCB Connectors > Wire-to-Board Connectors > FFC, FPC & Ribbon Connectors > Ribbon Cable Connectors



Connector System: **Wire-to-Board**
Number of Positions: **14**
Centerline (Pitch): **2.54 mm [.1 in]**
PCB Mount Retention: **Without**
PCB Mount Orientation: **Vertical**

Features

Product Type Features

Connector System	Wire-to-Board
Connector & Housing Type	Receptacle
Connector & Contact Terminates To	Wire & Cable
Connector Product Type	Connector Assembly
Ribbon Cable Connector Header Type	Pin Header

Configuration Features

Number of Positions	14
PCB Mount Orientation	Vertical
Number of Rows	2

Housing Features

Centerline (Pitch)	2.54 mm[.1 in]
Housing Material	Thermoplastic

Mechanical Attachment

PCB Mount Retention	Without
---------------------	---------



Mating Alignment Type	Polarization
Mating Retention	Without
Connector Mounting Type	Cable Mount (Free-Hanging)
Panel Mount Feature	Without
Mating Alignment	With
PCB Mount Alignment	Without

Termination Features

Termination Method to PCB	Through Hole - Solder
Termination Method to Wire & Cable	Insulation Displacement (IDC)

Dimensions

Row-to-Row Spacing	2.54 mm[.1 in]
Compatible Insulation Diameter Range	.79 – .94 mm[.031 – .037 in]
Connector Width	7.49 mm[.295 in]
Wire Size	28 – 26 AWG
Connector Height	15.16 mm[.597 in]
Connector Length	22.35 mm[.88 in]

Body Features

Connector Profile	Low
Daisy Chain	Without
Primary Product Color	Black

Contact Features

Contact Current Rating (Max)	1 A
Contact Underplating Material	Nickel
Mating Pin Diameter	.64 mm[.025 in]
Contact Mating Area Plating Material Thickness	.76 µm[29.92 µin]
Wire Contact Termination Area Plating Material	Tin
Mating Square Post Dimension	.64 mm[.025 in]
Contact Shape & Form	Tuning Fork
Contact Mating Area Plating Material	Gold Flash over Palladium Nickel, Gold
Contact Base Material	Phosphor Bronze
Wire Contact Termination Area Plating Thickness	1.27 µm[50 µin]
Contact Type	Socket



Operation/Application

Circuit Application	Signal
---------------------	--------

Usage Conditions

Operating Temperature Range	-65 – 105 °C[-85 – 221 °F]
-----------------------------	----------------------------

Other

EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant

Electrical Characteristics

Operating Voltage	250 VAC
Insulation Resistance	5000 MΩ

Industry Standards

Compatible With Agency/Standards Products	UL, CSA
UL Rating	Recognized
UL Flammability Rating	UL 94V-0
Compatible With Approved Standards Products	UL E28476, CSA LR7189

Packaging Features

Packaging Quantity	50
Packaging Method	Tube, Box & Tube

Product Compliance

For compliance documentation, visit the product page on TE.com>

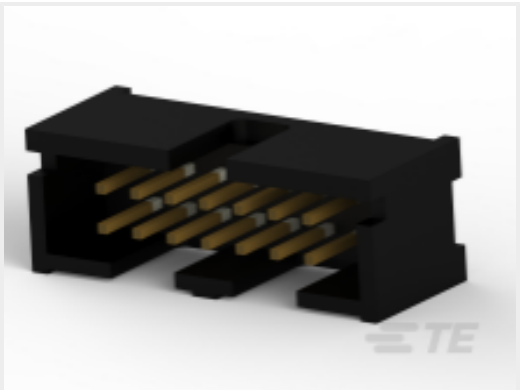
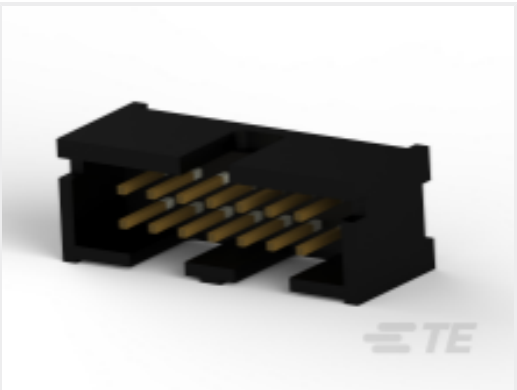
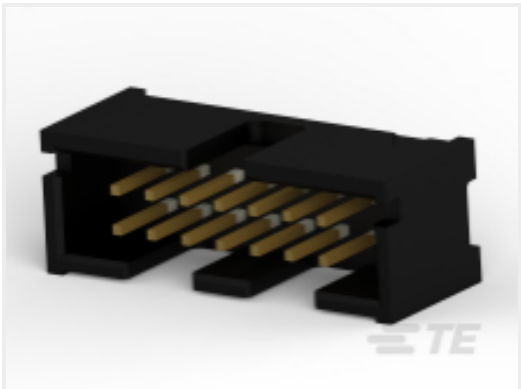
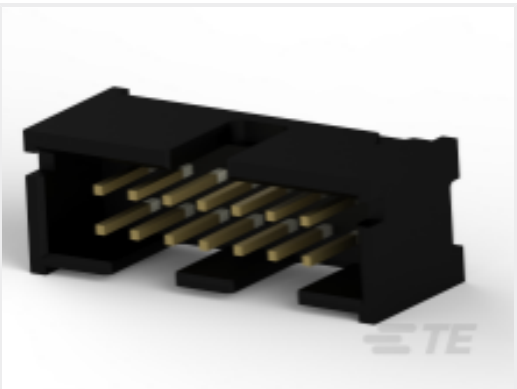
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # CAT-AM74-UN384H AMP-LATCH UNIVERSAL HEADERS	 TE Part # 499252-9 014 STRAIN RELIEF A-L RCPT	 TE Part # 5103309-2 A/L LOW PRO HDR 14P VERT BLACK	 TE Part # 5103310-2 A/L LOW PRO HDR 14P RA BLACK
 TE Part # 1-111446-5 14 UNIV I/O, NO EARS, LEAD FREE	 TE Part # 5103308-2 A/L LOW PRO HDR 14P VERT BLACK	 TE Part # 5103311-2 A/L LOW PRO HDR 14P RA BLACK	 TE Part # 5104338-2 A/L LOW PRO HDR 14P VERT HT
 TE Part # 1-111504-5 014 UNIV I/O 30DP NO EARS LTCH	 TE Part # 5104340-2 A/L LOW PRO HDR 14P RA HT	 TE Part # 1-111492-6 014 UNIV I/O 30DP NO EARS LTCH	 TE Part # 768340-1 UNIV HAND TOOL KIT AMPLATCH

Also in the Series | AMP-LATCH - NOVO



Ribbon Cable Connectors(46)

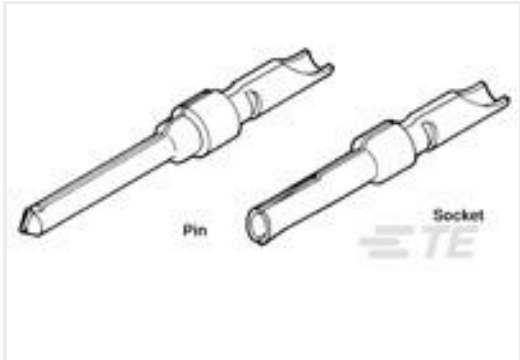
Customers Also Bought



TE Part #5499922-9
AMP-LATCH UNIVERSAL HEADERS



TE Part #1462039-2
IM07CGR=IM RELAY 200mW 24V HDV



TE Part #66569-3
20DF SOCKET CONT. L.P.



TE Part #350218-1
UMNL PIN 20-14 .0126PTPBR



TE Part #1658624-4
20 NOVO DUAL 30DP, LEAD FREE



TE Part #1658624-9
40 NOVO DUAL 30DP, LEAD FREE

Documents

Product Drawings

014 NOVO DUAL 30DP FT

English

CAD Files

Customer View Model

ENG_CVM_CVM_1658624-2_D.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1658624-2_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1658624-2_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.



Datasheets & Catalog Pages
Ribbon Cable Interconnect Solutions

English

Product Specifications
Application Specification

English

Instruction Sheets
Instruction Sheet (U.S.)

English

Agency Approvals
Agency Approval Document

English