




REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	I	PRELIMINARY	11OCT2014	DLD	CJS
	A	RELEASED PER ECO-15-002891	24FEB2015	DLD	CJS
	A1	REV PER ECN-23-235069	03NOV2023	SMR	CS

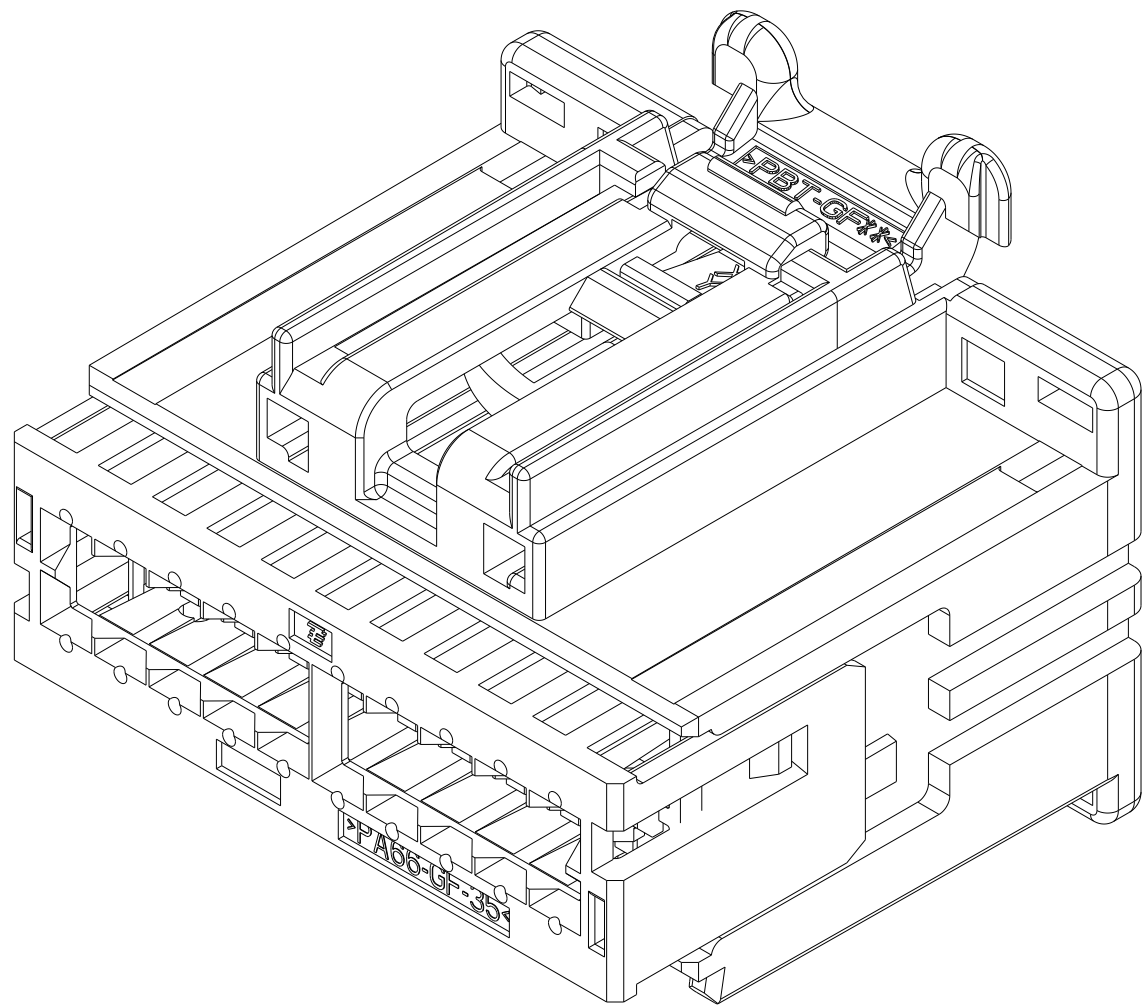

ISOMETRIC VIEW

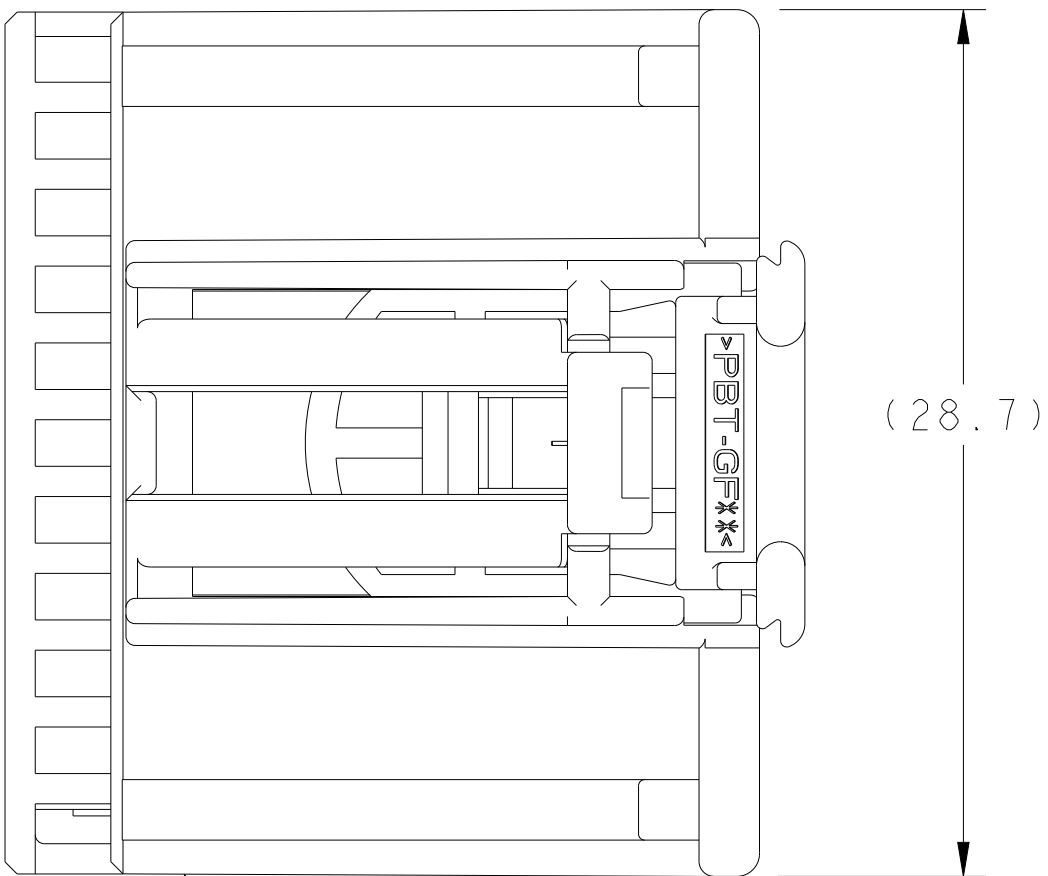


HOUSING
MAT'L: NYLON 6/6, 35% GLASS FILLED
COLOR: SEE TABLE

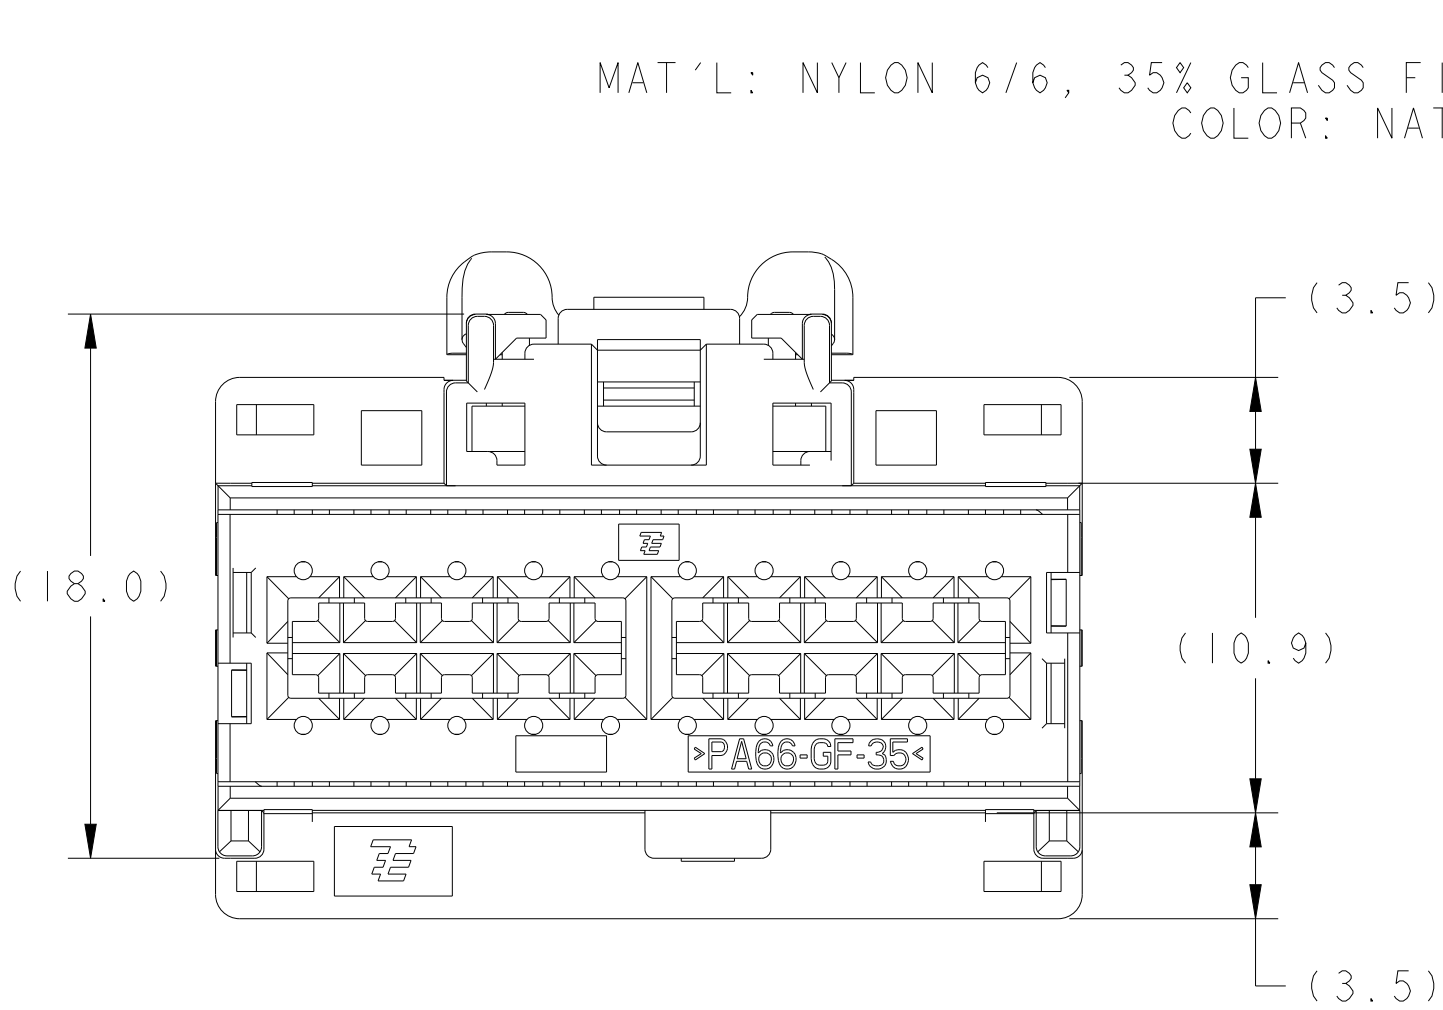

TPA
MAT'L: NYLON 6/6, 35% GLASS FILLED
COLOR: NATURAL

CPA (OPTIONAL)
MAT'L: PBT, 20% GLASS FILLED
COLOR: RED

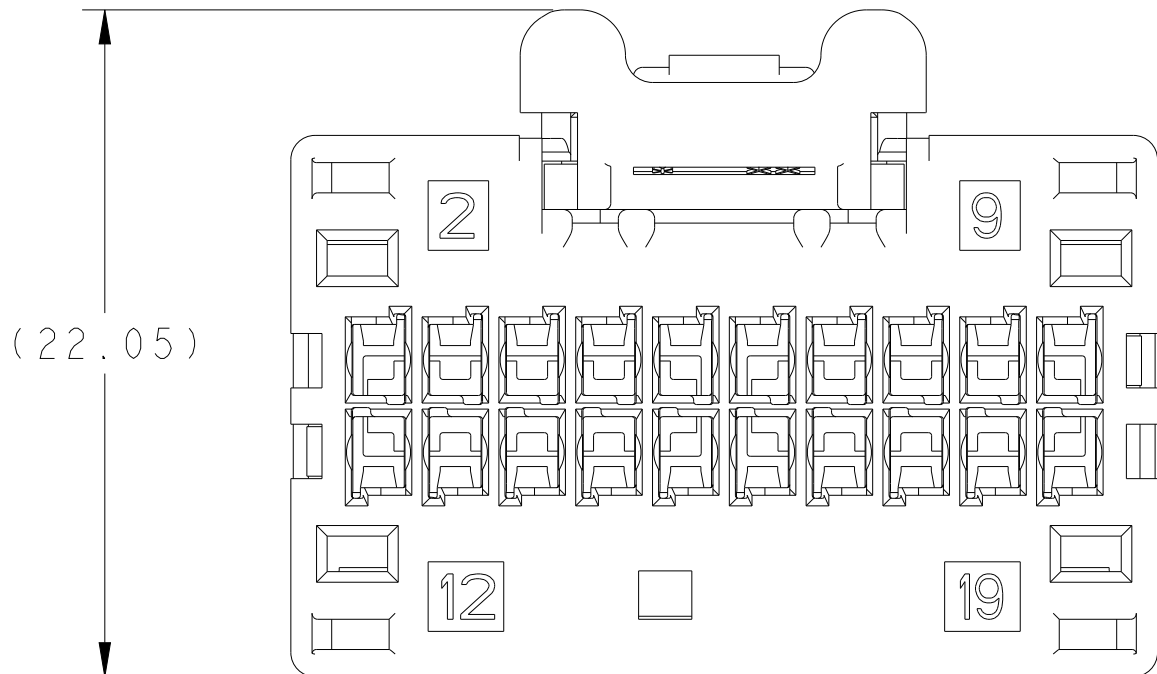

- 1

TPA SHIPPED IN PRE-LATCHED POSITION. TPA'S MAY BECOME SEATED DURING SHIPPING DUE TO BULK PACKAGING. REFERENCE INSTRUCTION SHEET 408-10372 FOR REPOSITIONING OF TPA.
- 2

2288276-7 SHOWN (KEYING OPTION A). REFER TO EWCAP DRAWING 064-U-020-2-Z01 FOR KEYING OPTION VIEWS.
- 3

THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING.
- 4

PRELIMINARY - NOT RELEASED FOR PRODUCTION
5.

30N MAX TERMINAL PUSH THROUGH WITHOUT BUCKLING.
6.

40N MIN UNMATED CPA PRESTAGE TO LOCK.
7.

40N MIN CPA REMOVAL FORCE.

SUPPLIED	OPTION F	---	1-2288276-2	3 4
SUPPLIED	OPTION E	---	1-2288276-1	3 4
SUPPLIED	OPTION D	---	1-2288276-0	3 4
SUPPLIED	OPTION C	---	2288276-9	3 4
SUPPLIED	OPTION B	GRAY	2288276-8	
SUPPLIED	OPTION A	BLACK	2288276-7	
NOT SUPPLIED	OPTION F	---	2288276-6	3 4
NOT SUPPLIED	OPTION E	---	2288276-5	3 4
NOT SUPPLIED	OPTION D	---	2288276-4	3 4
NOT SUPPLIED	OPTION C	---	2288276-3	3 4
NOT SUPPLIED	OPTION B	GRAY	2288276-2	
NOT SUPPLIED	OPTION A	BLACK	2288276-1	
CPA	USCAR KEYING OPTION 2	COLOR	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. DRUMMOND 17OCT2014	 TE Connectivity			
DIMENSIONS:		CHK C. SCHMID 17OCT2014				
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD C. SCHMID 17OCT2014	NAME	PLUG ASSEMBLY, 2 X 10, UNSEALED, 0.64, GENERATION Y USCAR		
	0 PLC ±. 1 PLC ±0.3 2 PLC ±0.20 3 PLC ±. 4 PLC ±. ANGLES ±1°	PRODUCT SPEC - APPLICATION SPEC 408-10372				
MATERIAL	FINISH	WEIGHT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
SEE CALLOUT	-	-	A1	100779	C=2288276	-
CUSTOMER DRAWING			SCALE	4:1	SHEET 1 OF 1	REV. A1