
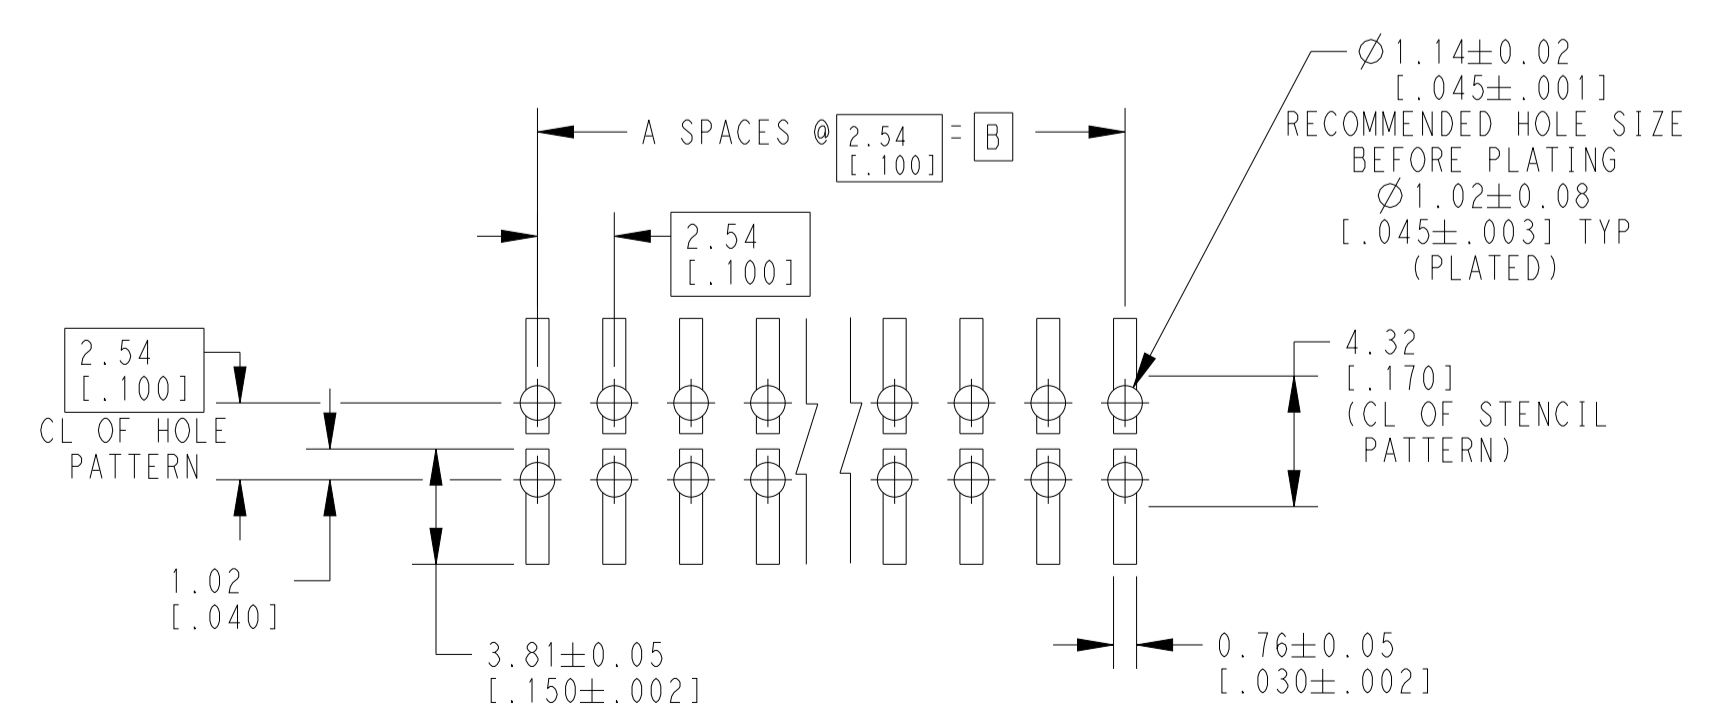
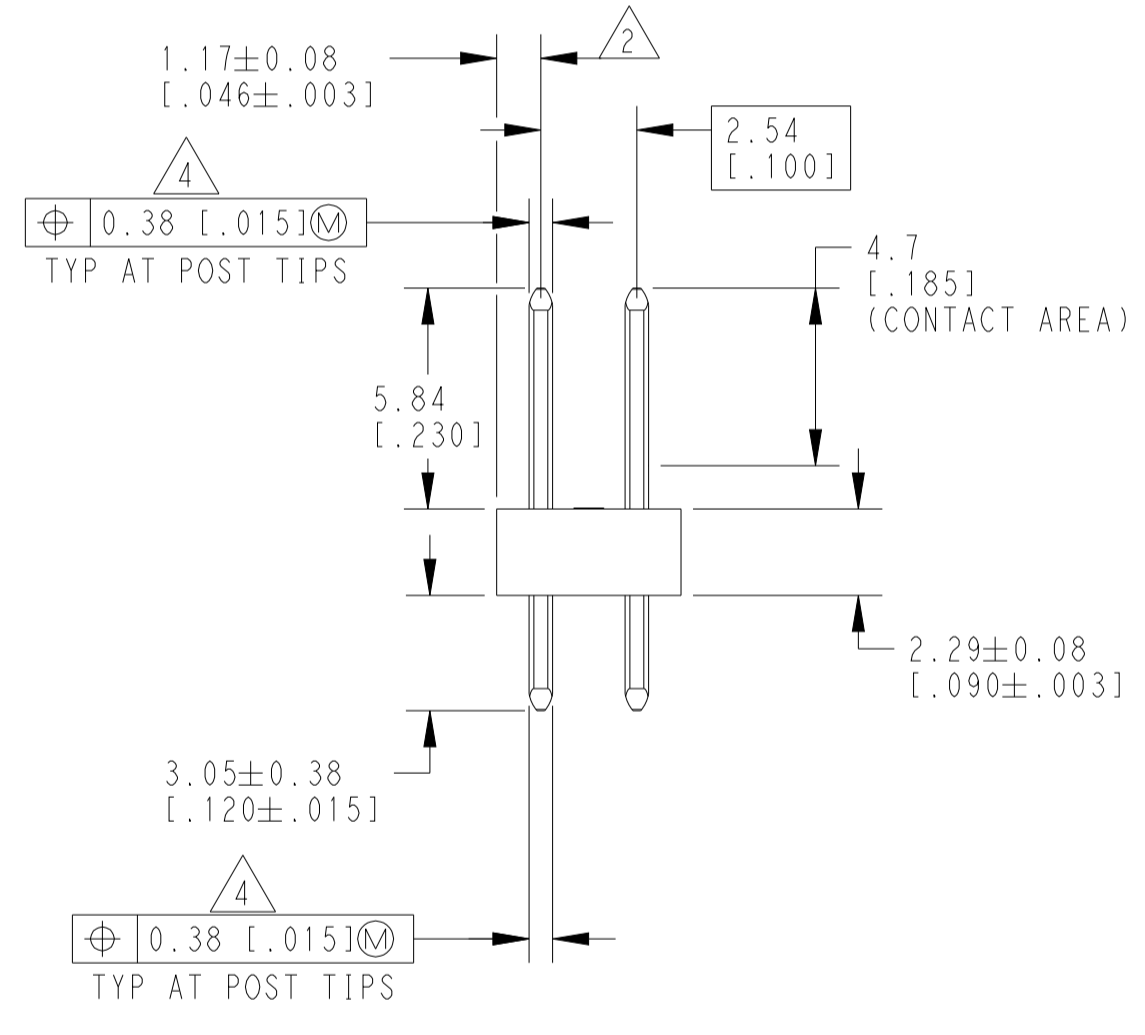
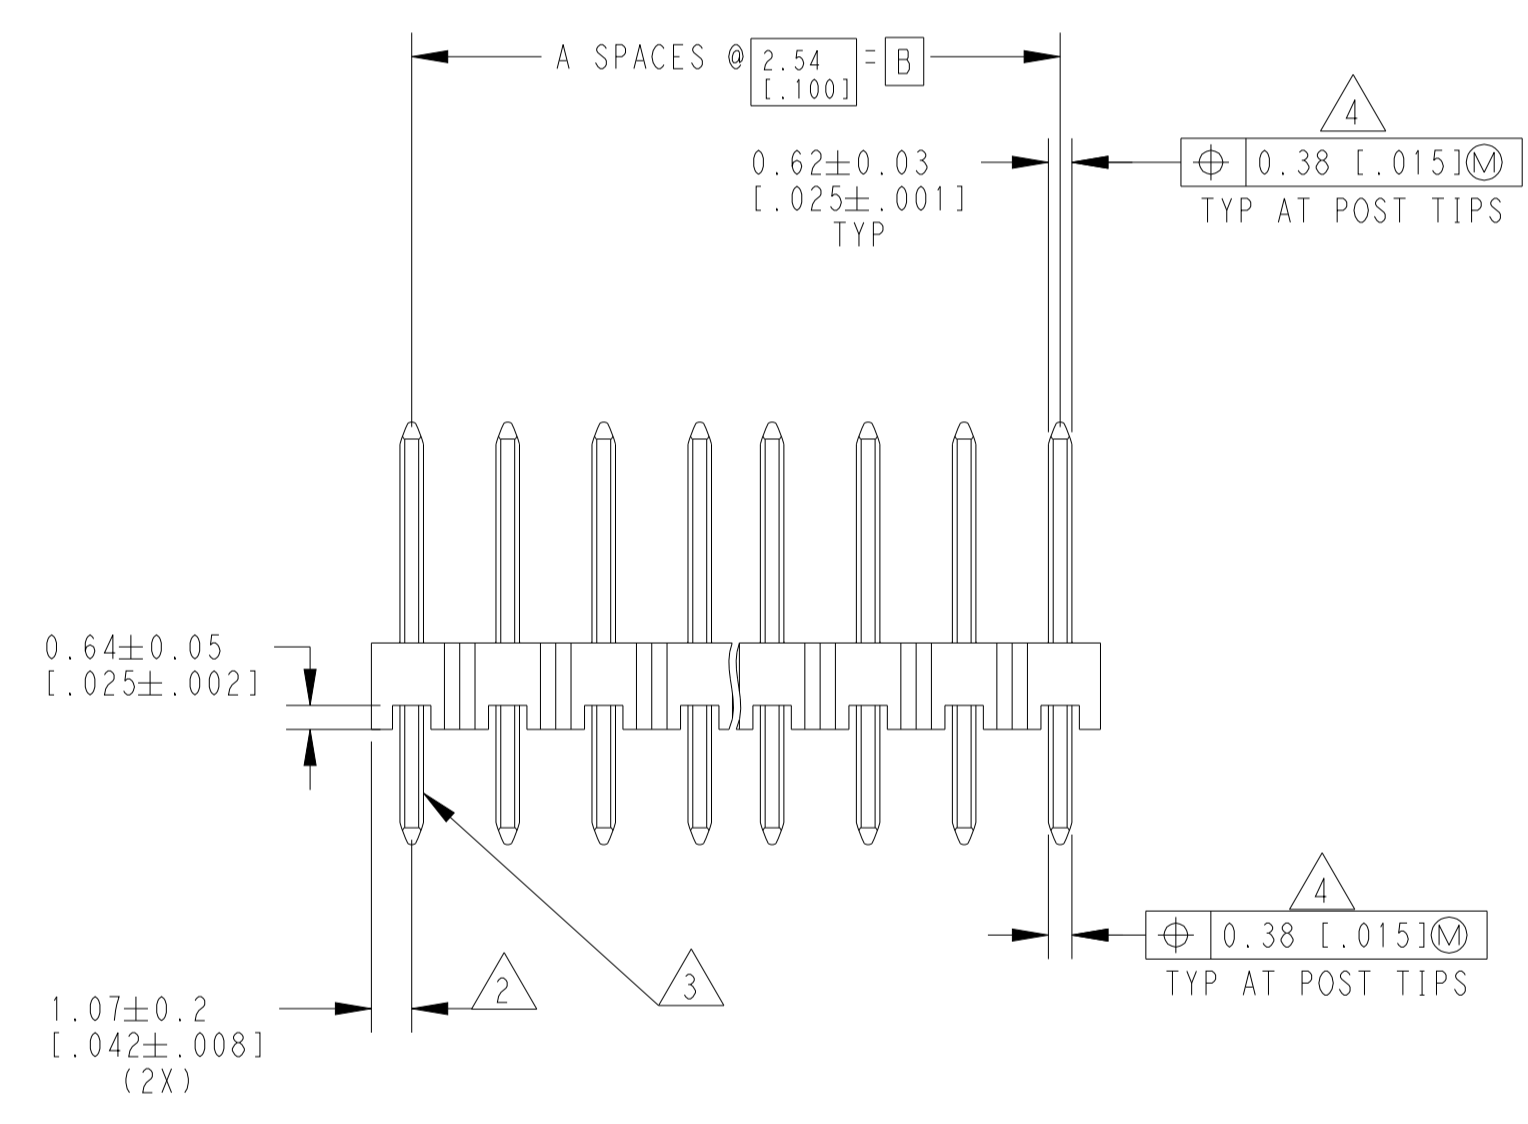


REVISIONS					
P	LTN	DESCRIPTION	DATE	OWN	APVD
H1		REVISED PER ECN-23-192507	05JAN2023	RK	MF
J		PLATING PLATING OPTIMIZATION (Au TO PdNi+Au FLASH)	07AUG2025	RS	GVP

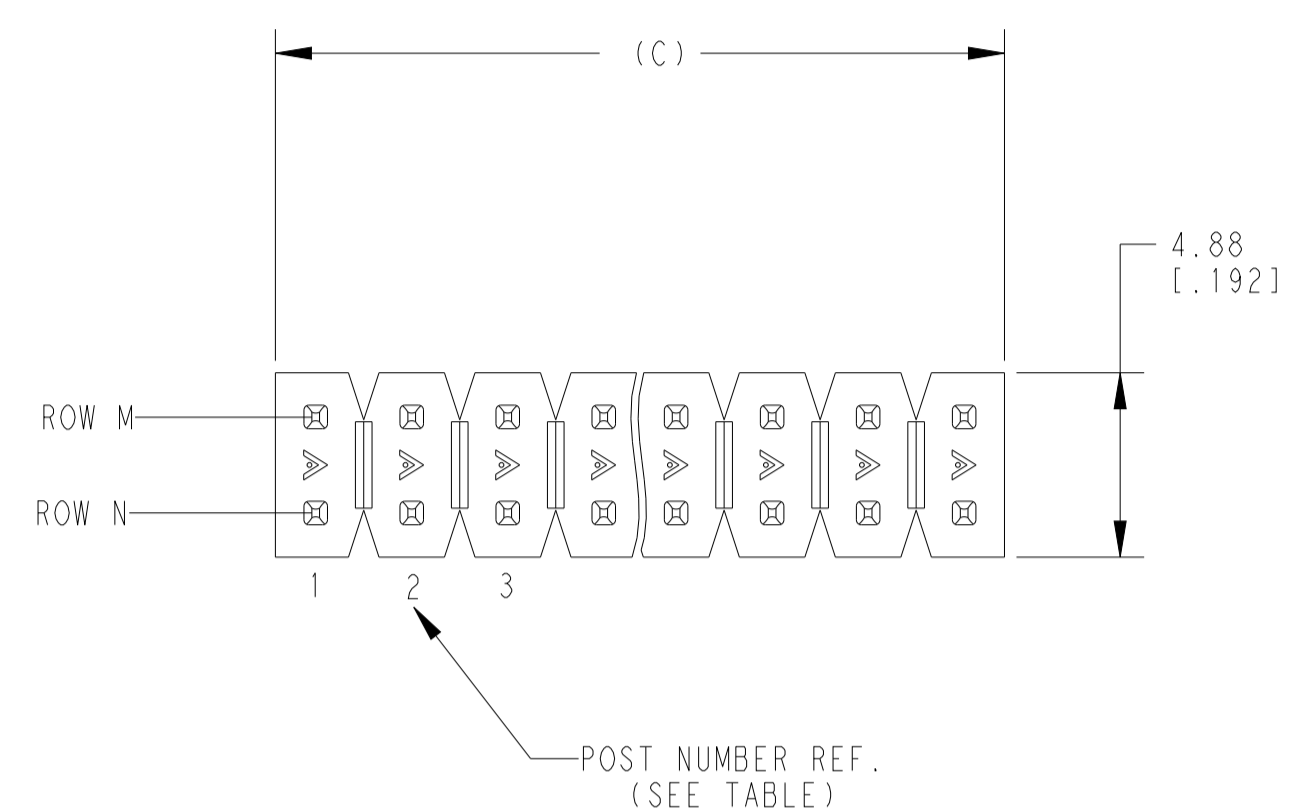

RECOMMENDED PC BOARD MOUNTING DIMENSIONS FOR 1.60[1.063] THICK PC BOARD AND 0.305[0.012] STENCIL THICK

NO.	DESCRIPTION	DATE	OWN	APVD	NO. OF POSITIONS	PART NUMBER
8	OBSOLETE	101.19 [3.984]	99.06 [3.900]	39	80	-4 146269-0
8	OBSOLETE	98.65 [3.884]	96.52 [3.800]	38	78	-3 146269-9
8	OBSOLETE	96.11 [3.784]	93.98 [3.700]	37	76	-3 146269-8
8	OBSOLETE	93.57 [3.684]	91.44 [3.600]	36	74	-3 146269-7
8	OBSOLETE	91.03 [3.584]	88.90 [3.500]	35	72	-3 146269-6
8	OBSOLETE	88.49 [3.484]	86.36 [3.400]	34	70	-3 146269-5
8	OBSOLETE	85.95 [3.384]	83.82 [3.300]	33	68	-3 146269-4
8	OBSOLETE	83.41 [3.284]	81.28 [3.200]	32	66	-3 146269-3
8	OBSOLETE	80.87 [3.184]	78.74 [3.100]	31	64	-3 146269-2
8	OBSOLETE	78.33 [3.084]	76.20 [3.000]	30	62	-3 146269-1
8	OBSOLETE	75.79 [2.984]	73.66 [2.900]	29	60	-3 146269-0
8	OBSOLETE	73.25 [2.884]	71.12 [2.800]	28	58	-2 146269-9
8	OBSOLETE	70.71 [2.784]	68.58 [2.700]	27	56	-2 146269-8
8	OBSOLETE	68.17 [2.684]	66.04 [2.600]	26	54	-2 146269-7
8	OBSOLETE	65.63 [2.584]	63.5 [2.500]	25	52	-2 146269-6
8	OBSOLETE	63.09 [2.484]	60.96 [2.400]	24	50	-2 146269-5
8	OBSOLETE	60.55 [2.384]	58.42 [2.300]	23	48	-2 146269-4
8	OBSOLETE	58.01 [2.284]	55.88 [2.200]	22	46	-2 146269-3
8	OBSOLETE	55.47 [2.184]	53.34 [2.100]	21	44	-2 146269-2
8	OBSOLETE	52.93 [2.084]	50.80 [2.000]	20	42	-2 146269-1
8	OBSOLETE	50.39 [1.984]	48.26 [1.900]	19	40	-2 146269-0
8	OBSOLETE	47.85 [1.884]	45.72 [1.800]	18	38	-1 146269-9
8	OBSOLETE	45.31 [1.784]	43.18 [1.700]	17	36	-1 146269-8
8	OBSOLETE	42.77 [1.684]	40.64 [1.600]	16	34	-1 146269-7
8	OBSOLETE	40.23 [1.584]	38.10 [1.500]	15	32	-1 146269-6
8	OBSOLETE	37.69 [1.484]	35.56 [1.400]	14	30	-1 146269-5
8	OBSOLETE	35.15 [1.384]	33.02 [1.300]	13	28	-1 146269-4
8	OBSOLETE	32.61 [1.284]	30.48 [1.200]	12	26	-1 146269-3
8	OBSOLETE	30.07 [1.184]	27.94 [1.100]	11	24	-1 146269-2
8	OBSOLETE	27.53 [1.084]	25.40 [1.000]	10	22	-1 146269-1
8	OBSOLETE	24.99 [0.984]	22.86 [0.900]	9	20	-1 146269-0
8	OBSOLETE	22.45 [0.884]	20.32 [0.800]	8	18	-146269-9
8	OBSOLETE	19.91 [0.784]	17.78 [0.700]	7	16	-146269-8
8	OBSOLETE	17.37 [0.684]	15.24 [0.600]	6	14	-146269-7
8	OBSOLETE	14.83 [0.584]	12.70 [0.500]	5	12	-146269-6
8	OBSOLETE	12.29 [0.484]	10.16 [0.400]	4	10	-146269-5
8	OBSOLETE	9.75 [0.384]	7.62 [0.300]	3	8	-146269-4
8	OBSOLETE	7.21 [0.284]	5.08 [0.200]	2	6	-146269-3
8	OBSOLETE	4.67 [0.184]	2.54 [0.100]	1	4	-146269-2
8	SUPSD BY 5-146269-1	2.13 [0.084]	-	0	2	-146269-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

TE Connectivity

DRW: T. HOFFMAN, 04MAR96
CHK: G. DUBNICZKI, 04MAR96
APVD: G. DUBNICZKI, 04MAR96

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±0.51 [0.02]
2 PLC ±0.127 [0.005]
3 PLC ±0.127 [0.005]
4 PLC ±0.0127 [0.0005]
ANGLES ±

MATERIAL: SEE TABLE

FINISH: SEE TABLE

WEIGHT: -

CUSTOMER DRAWING

NAME: HDR ASSY, MOD 11, B/1A, DR .100 X.100 CL, VERT, W/RET FEATURE, .025 SQ. PST, HT

SIZE: A | 00779 | C=146269

RESTRICTED TO: -

SCALE: 4:1 SHEET 1 OF 2 REV J

